



Canada Price List



Effective: July 1, 2026



Visit Welbilt Brand Portal:

<https://assets.welbilt.com/login/>



www.garlandcanada.ca



@thegarlandcanada

GARLAND
CANADA
 **WELBILT DISTRIBUTION**

Price List Canada

NOTICE:

DELFIELD PRODUCTS ARE NOT APPROVED OR AUTHORIZED FOR HOME OR RESIDENTIAL USE, BUT ARE INTENDED FOR COMMERCIAL APPLICATIONS ONLY. DELFIELD WILL NOT PROVIDE SERVICE, WARRANTY, MAINTENANCE OR SUPPORT OF ANY KIND OTHER THAN IN COMMERCIAL APPLICATIONS.

INSTRUCTIONS AND ASSISTANCE IN ORDERING

Specify the following information when ordering:

1. Your order number
2. Quantity and model number of units
3. Voltage, Cycle, (Hz), & Phase
4. Delivery date and shipping instruction

NOTE: Delfield custom units will require factory drawing(s) to be signed off before order will be processed

SERVICE

When corresponding with the factory regarding service, performance or replacement parts, be sure to refer to the particular product by correct model number including prefix and suffix letters, numbers and serial number. This information can be found on the rating plate. Any information pertaining to performance parts or servicing can be obtained by writing our Mississauga office. Continuous product improvement is a Garland policy, therefore specifications and design are subject to change without notice.

TERMS AND CONDITIONS

All prices exclude the Goods and Services Tax (G.S.T.) and Provincial and Local Taxes. All prices are in Canadian Dollars.

Refer to Garland dealer policy for:

- A. Terms of Sale
- B. Equipment Returns or Order Cancellations
- C. Damaged Shipments

Garland Canada reserves the right to change warranties, accessories or product configurations without notice. Access our website at www.GarlandCanada.ca for current information which supercedes any printed information. Further inquiries may also be directed to Customer Service at 1-888-442-7526.

GARLAND CANADA CUSTOMER SERVICE	VOICE	FAX
Sales	(888) 442-7526	(800) 361-2724
KitchenCare (Parts, Service and Warranty)	(844) 724-2273	N/A

INDEX BY EQUIPMENT TYPE

An introduction to each product line precedes its pricing section.

Accessories

Blast Chiller/Shock Freezers	19
Undercounter/Flat Top Fridge/Freezer Bases	24-25
Display Cases	45
Drop-Ins/Built-Ins	78
EHEI	41
Equipment Stands	39
Mobile Dispensing Equipment	83
Prep Tables	35-36
Serving Lines	62-66
DSL Specification Line	15
Work Tables Refrigerated and Freezer	5

Blast Chillers/Shock Freezers..... 18-19

Undercounter/Flat Top Fridge/Freezer Bases..... 21-23

Cashier Stands..... 51, 53, 61

Dish Dispensers

Drop In	75
Mobile Enclosed Frame	82

Drop Ins

Cold Pans	69-70
Cold Slab	71
Combo Hot/Cold	72
Dish Dispensers	75
Freezer	68
Frost Tops	71
Heated Food Wells.....	73-74
LiquiTec®.....	70
Sink, Faucets & Glass Fillers.....	68
Tray and Rack Dispenser	77
Water Station and Ice Storage.....	68

EHEI

Equipment Stands

Low Profile Refrigerated and Freezer Base	38
---	----

FlexiShield Foodshields

Freezers

Bases	18
Drop In	68
Dual Temp	12
Equipment Stands	39
Pass-Thrus	12
Reach-Ins	10, 17
Roll-ins.....	13
Serving Counters.....	46
Undercounter.....	21
Work Tables.....	27

Heated Units

Combo Hot/Cold Serving Counter	72
Dish Dispensers	75, 76
Drop Ins Food Wells	69-71
Food Table	41
Pass-Thrus	11
Reach-Ins	11
Roll-Ins.....	13
Roll-Thrus.....	14
Serving Counters.....	45,46,74

Lettuce and Vegetable Spin Drier

EcoMark Component Crafted Equipment... Please see separate book

EcoMark Prep Tables..... 30-34

Rack Dispensers

Drop-In	77
---------------	----

Refrigerators

Bases	38
Bases, Salad Top	30-34
Bases, Mega Top	30-34
Combo Hot/Cold Serving Counter	62, 72
Drop In Food Wells	69, 70
Dual Temp	12
Equipment Stands	39
Pass Thru	12
Reach-In	10, 17
Roll In.....	13
Roll Thru.....	14
Serving Counter	45-82
Work Table.....	27
Undercounter.....	25

Serving Counters

All purpose.....	53, 72, 73, 79-80
Beverage	71, 78
Combination Hot/Cold	68, 75
Frost Top.....	46, 69, 76
Handsink.....	52
Heated.....	45,46,74
Ice Pan.....	70, 77
Radial.....	47-50
Refrigerated.....	67,72

DSL Specification Line

Reach-in refrigerator & freezers	10
Heated Reach-in & pass-thru	11
Dual Temp & pass-thru refrigerator & freezers.....	12
Roll-ins.....	13
Roll-thrus & specialty.....	14

Tray Dispensers


Drop In/Built In.....	77
-----------------------	----

Work Tables..... 27

Undercounter

Chef's Counters Serving Systems Engineered Products

Infinite possibilities.

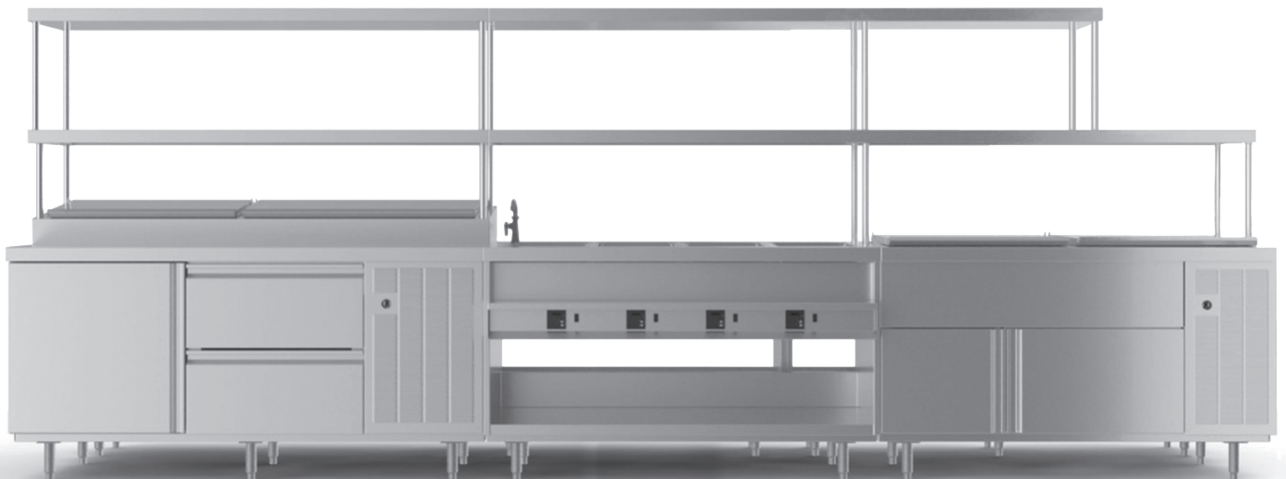

What is Delfield EcoMark Fabrication Equipment?

CHEF'S COUNTERS



Custom Fabrication With Standard Components

Delfield brings a different approach to custom fabrication. With any piece of equipment, such as utility storage, hot food table or glass rack cabinets, similar components are used. This holds true with freezers, refrigerators, prep tables, salad tables and so on. What Delfield has mastered is developing standard components that are consistent from job to job, year to year and month to month. What does this do for you? For one, the ability to purchase equipment that can be installed anywhere in the country and be assured it's the same each and every time. In addition, serviceability is increased due to common parts and labor is saved due to service technician's familiarity with the equipment. By developing common components in custom equipment Delfield is able to provide consistent pricing, no matter what time of year or how busy we happen to be.

SERVING SYSTEMS



Using the component crafted custom fabrication approach allows you to develop thousands of different equipment configurations while maintaining consistency throughout the equipment. Don't think for a minute this technique takes away from the quality of the equipment. It's quite the opposite, Delfield's ability to produce commonality in our equipment is a great value in many ways to our customer.

Delfield allows many of these components to be modified but remain similar in construction. This is the advantage of using Delfield over local custom fabrication. Our solid modeling capabilities, automated part demand flow, leading edge break presses, lasers and punches all give Delfield customers consistent precise products versus antiquated pencil marked, hand braked parts.

DELFIELD ECOMARK FABRICATION EQUIPMENT

Start building your dream counter now! All of these units can be combined under one continuous top (up to 168" long) Each unit can be quickly splined together or field welded, for seamless appearance.

GENERAL


- R290 or R-404A refrigerant options
- All units can be provided with optional 14-gauge stainless steel tops.
- Special electrical requirements available on all units
- All refrigerators can be supplied remote or self contained

14 SERIES HOT FOOD TABLES		14 SERIES HOT FOOD TABLES • Standard 16-gauge tops • Electric • Individually controlled or single tank water bath • Standard with drains and manifold • Optional cutting board • Optional auto fill • Available in any length
15 SERIES DISPLAY CASES		15 SERIES DISPLAY CASES • Standard 16-gauge tops • 24" or 30" deep under display section • Mirror back, single service display with a see through display section with glass doors on both sides. • Available in 4' and 6' lengths • Optional locks • Optional additional shelves • Optional mirrored interior doors
16 SERIES UTILITY STANDS		16 SERIES UTILITY STANDS • Standard 16-gauge tops • Open shelf • Dry drawer • Hinged door • Sliding door • Available in any length • Optional door/drawer locks • Optional urn trough • 10 year drawer warranty
17 SERIES EQUIPMENT STANDS		17 SERIES EQUIPMENT STANDS • Standard 18-gauge tops • Standard maple cutting board • Open shelf • Dry drawer • Refrigerated & freezer storage • Optional doors • Door/drawer locks • Freezers from 43" to 94" • Refrigerators from 39" to 122" • Available for bottom mounted ventilation • Full height sides and back for quick assembly into full equipment lineup • Feature Delfield's exclusive Full Extension Plus Drawer System

Specifications and prices subject to change without notice.

GENERAL

- R290 or R-404A refrigerant options
- All units can be provided with optional 14-gauge stainless steel tops
- Special electrical requirements available on all units
- All refrigerators can be supplied remote or self-contained

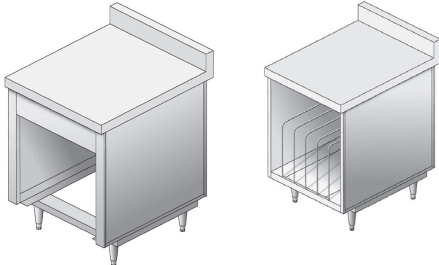18 SERIES WORK TABLES		18 SERIES WORK TABLES • Standard 16-gauge tops • Refrigerated or freezer models available • Optional 2 high and 3 high drawers • Available up to 126" with four door/drawer fronts • Optional tray racks
18 SERIES SALAD & MEGA TOP		18 SERIES SALAD AND MEGA TOP • Available from 36" to 132" with (4) base fronts • Optional pans and adapter bars • Number of pans to suit any need; 6 to 26 on salad tops and up to 42 on mega tops • Optional cover styles.
18 SERIES PIZZA PREP & SANDWICH TABLES		18 SERIES - PIZZA PREP AND SANDWICH TABLES • Available from 36" to 132" with (4) base fronts • Optional cutting boards • Optional 2 high and 3 high drawers • Optional locks available • Drain and gate valve available • Optional pans and adapter bars • Optional tray racks
20, 21, 22 SERIES ADD ON UNITS		20, 21, 22, SERIES TOP EXTENSIONS AND ADD ON UNITS • Available in any length and size • Top extensions • Dish rack and dispensers • Food warmers • Tilt out waste bins • Hinged door waste bin • Syrup tank storage cabinet • Oval tray storage • Build these units into any common top to come up with your desired length

Finish your line off with multiple options. Overshelves, finished backs and ends, tray slides, heat lamps, and outlets are all available to dress your counter. Make your vision a reality with Delfield Custom! Contact us at 800-733-8821 for a custom quote or pricing.

HOW TO ORDER DELFIELD ECOMARK EQUIPMENT

Need A Quote?

Delfield Sales ATTN: _____

Dealer ATTN: _____

Field Quote Request

Project Name: _____

Bid Date: _____

Location: (City/State) _____

Install Date: _____

Consultant: _____

Phone Number: _____

Is Line Up:

Component Crafted Custom Equipment Shelley

Refrigerated Units:

Self-contained Remote

Hot Food Wells:

Individual Open Bath

Pre Wired to:

Breaker Panel J-Box

Are Drawings Available:

Plan Elevation (scale) Hand Sketch

Similar to a Job Previously Quoted:

Name: _____

Accessories Supplied and Installed by Delfield:

Yes No

Customer Supplied/Installed by Delfield:

Yes No

Field Installed by Customer:

Yes No

Any Size Restrictions for Installation Site:

Max Size _____

Finish of Equipment:

S/S Laminate

Is this a:

Quote Only Quote and Drawing

Key for labeling drawing:

A: Dry Storage Unit

Refrigerated

B: Raised Refrigerated Rail

Salad Opening

LiquiTec®

C: Hot Food Wells

Mega Top Opening

Standard

ESP

D: Pass-thru Storage

Refrigerated

Open Shelf

E: Dry Drawer

Roll Warmer

Refrigerated Drawers

F: Overshelf

Single Double

Width: _____

Pot Rack

Single/Double

Oval

G: Microwave Shelf: Length: _____ Width: _____

H: Outlets

Heat Lamps

Empty Baskets

I: Hand Sink: Size: _____

J: Standard Units

K: Top Extension

L: Open Storage

Sliding Door

Hinged Door

DSL Specification Line®

Reach-in refrigerators and
freezers

Pass Thrus

Dual Temps

Roll ins & Roll thrus

Specialty



DSLR - REACH-IN REFRIGERATORS

DSLF - REACH-IN FREEZERS

Product Information



DSLR1-S

- Stainless steel exterior and interior
- easyTouch Control with remote monitoring capability
- Stay-open door feature for easy product loading and unloading
- Stainless steel door(s)
- Door activated interior LED light
- Heavy-duty cylinder lock
- Stainless steel interior door liner
- One piece, snap-in door gaskets
- Stainless steel breaker caps
- 3 silver freeze wire shelves
- 6" high adjustable stainless steel legs
- 8' cord and plug
- R-290 refrigerant
- Hot gas condensate evaporator
- Adaptive defrost
- Refrigerator capable of maintaining product temperature 36°F to 38°F
- Freezer capable of maintaining product temperature -10°F to 0°F.
- Three year parts and labour warranty and an additional 4 year compressor parts warranty.

Specifications and Prices

Model	Description	V/Hz/Ph	Amps	Volume Cu. Ft.	Shelf Capacity Sq. Ft.	# of Shelves	Unit H.P.	Btu/Hr System Cap	Ship Weight	Nema Plug	List Price
REFRIGERATORS											
DSLR1-S	One section, Full height solid door	115/60/1	6.5	21	N/A	3	1/3	2800	331 lbs	5-15P	\$24,295
DSLR2-S	Two section, Full height solid door	115/60/1	6.5	44.57	N/A	6	1/3	2800	560 lbs	5-15P	\$32,630
DSLR3-S	Three section, Full height solid door	115/60/1	6.5	68.34	N/A	9	3/4	4950	774 lbs	5-15P	\$45,525
DSLR1-SH	One section, Half height solid door	115/60/1	6.5	21	N/A	3	1/3	2800	404 lbs	5-15P	\$26,020
DSLR2-SH	Two section, Half height solid door	115/60/1	6.5	44.57	N/A	6	1/3	2800	580 lbs	5-15P	\$34,300
DSLR3-SH	Three section, Half height solid door	115/60/1	6.5	68.34	N/A	9	3/4	4950	798 lbs	5-15P	\$47,805
DSLR1-G	One section, Full height glass door	115/60/1	6.5	21	N/A	3	1/3	2800	408 lbs	5-15P	\$26,345
DSLR2-G	Two section, Full height glass door	115/60/1	6.5	44.57	N/A	6	1/3	2800	576 lbs	5-15P	\$34,795
DSLR3-G	Three section, Full height glass door	115/60/1	6.5	68.34	N/A	9	3/4	4950	800 lbs	5-15P	\$49,890
DSLR1-GH	One section, Half height glass door	115/60/1	6.5	21	N/A	3	1/3	2800	408 lbs	5-15P	\$28,440
DSLR2-GH	Two section, Half height glass door	115/60/1	6.5	44.57	N/A	6	1/3	2800	576 lbs	5-15P	\$37,510
DSLR3-GH	One section, Half height glass door	115/60/1	6.5	68.34	N/A	9	3/4	4950	800 lbs	5-15P	\$52,970
FREEZERS											
DSLF1-S	One section, Full height solid door	115/60/1	9.1	21	N/A	3	3/4	2450	390 lbs	5-15P	\$28,440
DSLF2-S	Two section, Full height solid door	115/60/1	10.5	44.5	N/A	6	3/4	4900	444 lbs	5-15P	\$36,430
DSLF3-S	Three section, Full height solid door	115/60/1	13.9	68.3	N/A	9	(2X)3/4	4900	820 lbs	5-20P	\$52,535
DSLF1-SH	One section, Half height solid door	115/60/1	9.1	21	N/A	3	3/4	2450	396 lbs	5-15P	\$30,755
DSLF2-SH	Two section, Half height solid door	115/60/1	10.5	44.5	N/A	6	3/4	4900	482 lbs	5-15P	\$38,020
DSLF3-SH	Three section, Half height solid door	115/60/1	13.9	68.3	N/A	9	(2X)3/4	4900	918 lbs	5-20P	\$55,325
DSLF1-G	One section, Full height glass door	115/60/1	9.1	21	N/A	3	3/4	2450	430 lbs	5-15P	\$31,285
DSLF2-G	Two section, Full height glass door	115/60/1	10.5	44.5	N/A	6	3/4	4900	586 lbs	5-15P	\$40,075
DSLF3-G	Three section, Full height glass door	115/60/1	13.9	68.3	N/A	9	(2X)3/4	4900	856 lbs	5-20P	\$57,790
DSLF1-GH	One section, Half height glass door	115/60/1	9.1	21	N/A	3	3/4	2450	436 lbs	5-15P	\$33,835
DSLF2-GH	Two section, Half height glass door	115/60/1	10.5	44.5	N/A	6	3/4	4900	654 lbs	5-15P	\$41,820
DSLF3-GH	Three section, Half height glass door	115/60/1	13.9	68.3	N/A	9	(2X)3/4	4900	918 lbs	5-20P	\$60,860

Specification Line accessories and modifications can be found on page 15.

Specifications and prices subject to change without notice.

DSLH - REACH-IN HEATED DSLHP - PASS-THRU HEATED

Product Information

- Stainless steel exterior and interior
- easyTouch Control with remote monitoring capability
- Stay-open door feature for easy product loading and unloading
- Stainless steel door(s)
- Door activated interior LED light
- Heavy-duty cylinder lock
- Stainless steel interior door liner
- One piece, snap-in door gaskets
- Stainless steel breaker caps
- 3 silver freeze wire shelves
- 6" high adjustable stainless steel legs
- 8' cord and plug
- Adjustable Electronic Temp Control From 80°F To 180°F
- Built-In, Adjustable Humidity Control Vent
- Safety Shielded Strip Type Heating Elements
- Externally Mounted Blower Maintains Even Temperatures
- Three year parts and labour warranty and an additional 4 year compressor parts warranty.



DSLH1-SH

Specifications and Prices

Heated reach-ins

Model	Description	V/Hz/Ph	Amps	Volume Cu. Ft.	Shelf Capacity Sq. Ft.	# of Shelves	Unit H.P.	Btu/Hr System Cap	Ship Weight	Nema Plug	List Price
DSLH1-S	One section, Full height solid door	208-240/60/1	6.3	21.5	N/A	N/A	1500	N/A	320 lbs	6-20P	\$20,580
DSLH2-S	Two section, Full height solid door	208-240/60/1	13	46.5	N/A	N/A	3000	N/A	440 lbs	6-20P	\$30,545
DSLH1-SH	One section, Half height solid door	208-240/60/1	6.3	21.5	N/A	N/A	1500	N/A	320 lbs	6-20P	\$22,735
DSLH2-SH	Two section, Half height solid door	208-240/60/1	13	46.5	N/A	N/A	3000	N/A	440 lbs	6-20P	\$32,635
DSLH1-G	One section, Full height glass door	208-240/60/1	6.8	21.5	N/A	N/A	1500	N/A	320 lbs	6-20P	\$21,625
DSLH2-G	Two section, Full height glass door	208-240/60/1	13	46.5	N/A	N/A	3000	N/A	440 lbs	6-20P	\$33,560
DSLH1-GH	One section, Half height glass door	208-240/60/1	6.8	21.5	N/A	N/A	1500	N/A	320 lbs	6-20P	\$23,620
DSLH2-GH	Two section, Half height glass door	208-240/60/1	13	46.5	N/A	N/A	3000	N/A	440 lbs	6-20P	\$35,980

Heated pass-thrus

Model	Description	V/Hz/Ph	Amps	Volume Cu. Ft.	Shelf Capacity Sq. Ft.	# of Shelves	Unit H.P.	Btu/Hr System Cap	Ship Weight	Nema Plug	List Price
DSLHPT1-S	One section, Full height solid door	208-240/60/1	6.8	23.7	N/A	N/A	1500	N/A	527 lbs	6-20P	\$24,845
DSLHPT2-S	Two section, Full height solid door	208-240/60/1	13	48	N/A	N/A	3000	N/A	544 lbs	6-20P	\$42,505
DSLHPT1-SH	One section, Half height solid door	208-240/60/1	6.8	23.7	N/A	N/A	1500	N/A	527 lbs	6-20P	\$27,150
DSLHPT2-SH	Two section, Half height solid door	208-240/60/1	13	48	N/A	N/A	3000	N/A	544 lbs	6-20P	\$44,990
DSLHPT1-G	One section, Full height glass door	208-240/60/1	6.8	23.7	N/A	N/A	1500	N/A	535 lbs	6-20P	\$27,850
DSLHPT2-G	Two section, Full height glass door	208-240/60/1	13	46.5	N/A	N/A	3000	N/A	620 lbs	6-20P	\$47,800
DSLHPT1-GH	One section, Half height glass door	208-240/60/1	6.8	23.7	N/A	N/A	1500	N/A	535 lbs	6-20P	\$30,025
DSLHPT2-GH	Two section, Half height glass door	208-240/60/1	13	46.5	N/A	N/A	3000	N/A	620 lbs	6-20P	\$51,065

Specification Line® Reach-Ins accessories and modifications can be found on page 15.

Specifications and prices subject to change without notice.

DSLDT - DUAL TEMP DSLPT -PASS-THRU REFRIGERATORS DSLPTF -PASS-THRU FREEZERS



DSLRT2-G

Product Information

- Stainless steel exterior and interior
- easyTouch Control with remote monitoring capability
- Stay-open door feature for easy product loading and unloading
- Door activated interior LED light
- Heavy-duty cylinder lock
- One piece, snap-in door gaskets
- Stainless steel breaker caps
- 3 silver freeze wire shelves
- 6" high adjustable stainless steel legs
- 8' cord and plug
- R-290 refrigerant
- Hot gas condensate evaporator
- Adaptive defrost
- Refrigerator capable of maintaining product temperature 36°F to 38°F
- Freezer capable of maintaining product temperature -10°F to 0°F.
- Three year parts and labour warranty and an additional 4 year compressor parts warranty.

Specifications and Prices

Dual temps

Model	Description	V/Hz/Ph	Amps	Volume Cu. Ft.	Shelf Capacity Sq. Ft.	# of Shelves	Unit H.P.	Btu/Hr System Cap	Ship Weight	Nema Plug	List Price
DSLDTR1-SH	One section, Half height solid door	115/60/1	6	21	34.4	8	(REF)1/5 (FRZR)1/3	1431 / 1094	351 lbs	5-15P	\$34,695
DSLDTBR1-SH	Two section, Half height solid door	115/60/1	6	21	34.4	8	(REF)1/5 (FRZR)1/3	1431 / 1094	351 lbs	5-15P	\$34,695
DSLDTFL2-S	One section, Full height solid door	115/60/1	12	46	68.8	16	(REF)1/5 (FRZR)1/2	1799 / 2035	495 lbs	5-20P	\$41,125
DSLDTRL2-S	Two section, Full height solid door	115/60/1	12	46	68.8	16	(REF)1/5 (FRZR)1/2	1799 / 2035	495 lbs	5-20P	\$41,125

Refrigerator, Freezer pass-thrus

Model	Description	V/Hz/Ph	Amps	Volume Cu. Ft.	Shelf Capacity Sq. Ft.	# of Shelves	Unit H.P.	Btu/Hr System Cap	Ship Weight	Nema Plug	List Price
DSLRTPT1-S	One section, Full height solid door	115/60/1	6.5	22.9	N/A	3	1/3	2800	454 lbs	5-15P	\$28,225
DSLRTPT2-S	Two section, Full height solid door	115/60/1	6.5	48.33	N/A	6	1/3	2800	542 lbs	5-15P	\$41,875
DSLRTPT1-SH	One section, Half height solid door	115/60/1	6.5	22.9	N/A	3	1/3	2800	454 lbs	5-15P	\$30,770
DSLRTPT2-SH	Two section, Half height solid door	115/60/1	6.5	48.33	N/A	6	1/3	2800	542 lbs	5-15P	\$43,725
DSLRTPT1-G	One section, Full height glass door	115/60/1	6.5	22.9	N/A	3	1/3	2800	428 lbs	5-15P	\$29,565
DSLRTPT2-G	Two section, Full height glass door	115/60/1	8.5	48.33	N/A	6	3/4	4950	696 lbs	5-15P	\$46,015
DSLRTPT1-GH	One section, Half height glass door	115/60/1	6.5	22.9	N/A	3	1/3	2800	454 lbs	5-15P	\$33,275
DSLRTPT2-GH	Two section, Half height glass door	115/60/1	8.5	48.33	N/A	6	3/4	4950	716 lbs	5-15P	\$48,465
DSLFTPT1-S	One section, Full height solid door	115/60/1	9.1	22.9	N/A	3	3/4	2450	358 lbs	5-15P	\$32,125
DSLFTPT2-S	Two section, Full height solid door	115/60/1	13.9	48.33	N/A	6	3/4	4900	572 lbs	5-20P	\$44,630
DSLFTPT1-SH	One section, Half height solid door	115/60/1	9.1	22.9	N/A	3	3/4	2450	399 lbs	5-15P	\$34,015
DSLFTPT2-SH	Two section, Half height solid door	115/60/1	13.9	48.33	N/A	6	3/4	4900	647 lbs	5-20P	\$48,700

Specification Line® Reach-Ins accessories and modifications can be found on page 15.

Specifications and prices subject to change without notice.

DSLRR1 - ROLL IN REFRIGERATOR DSLFR1 - ROLL IN FREEZER DSLHRI - ROLL - IN HEATED

Product Information

- Stainless steel exterior and interior
- easyTouch Control with remote monitoring capability
- Stay-open door feature for easy product loading and unloading
- Stainless steel door(s)
- Door activated interior LED light
- Heavy-duty cylinder lock
- Stainless steel interior door liner
- One piece, snap-in door gaskets
- Stainless steel breaker caps
- 3 silver freeze wire shelves
- 8' cord and plug
- R-290 refrigerant
- Adjustable Electronic Temp Control From 80°F To 180°F
- Hot gas condensate evaporator
- Adaptive defrost
- Refrigerator capable of maintaining product temperature 36°F to 38°F
- Freezer capable of maintaining product temperature -10°F to 0°F.
- S/S finish door liner
- Accepts Carts: 26 1/2" w x 28" D x 65" H (cart not included)
- Three year parts and labour warranty and an additional 4 year compressor parts warranty.



DSLRR11-S

Specifications and Prices

Model	Description	V/Hz/Ph	Amps	Volume Cu. Ft.	Shelf Capacity Sq. Ft.	# of Shelves	Unit H.P.	Btu/Hr System Cap	Ship Weight	Nema Plug	List Price
DSLRR11-S	One section, Full height solid door	115/60/1	6.5	34.86	N/A	N/A	1/3	2800	476 lbs	5-15P	\$28,340
DSLRR12-S	Two section, Full height solid door	115/60/1	8.5	70.84	N/A	N/A	3/4	4950	694 lbs	5-15P	\$38,625
DSLRR11-G	One section, Full height glass door	115/60/1	6.5	34.86	N/A	N/A	1/3	2800	490 lbs	5-15P	\$31,585
DSLRR12-G	Two section, Full height glass door	115/60/1	8.5	70.84	N/A	N/A	3/4	4950	742 lbs	5-15P	\$41,900
DSLFR11-S	One section, Full height solid door	115/60/1	9.1	34.86	N/A	N/A	3/4	2450	474 lbs	5-15P	\$31,905
DSLFR12-S	Two section, Full height solid door	115/60/1	13.9	70.84	N/A	N/A	(2X)3/4	4900	682 lbs	5-20P	\$47,130
DSLHRI1-S	One section, Full height solid door	208-240/60/1	6.8	33.6	N/A	N/A	N/A	1500	355 lbs	6-20P	\$26,480
DSLHRI2-S	Two section, Full height solid door	208-240/60/1	13	67.2	N/A	N/A	N/A	3000	560 lbs	6-20P	\$36,455
DSLHRI1-G	One section, Full height glass door	208-240/60/1	6.8	33.6	N/A	N/A	N/A	1500	355 lbs	6-20P	\$29,610
DSLHRI2-G	Two section, Full height glass door	208-240/60/1	13	67.2	N/A	N/A	N/A	3000	560 lbs	6-20P	\$40,695

Specification Line® Reach-Ins accessories and modifications can be found on page 15.

SPECIFICATION LINE® ROLL-INS

DSLRRT - ROLL-THRU REFRIGERATOR

DSLHRT - ROLL-THRU HEATED



DSLRRT1-S

Product Information

- Stainless steel exterior and interior
- easyTouch Control with remote monitoring capability
- Stay-open door feature for easy product loading and unloading
- Stainless steel door(s)
- Door activated interior LED light
- Heavy-duty cylinder lock
- Stainless steel interior door liner
- One piece, snap-in door gaskets
- Stainless steel breaker caps
- 3 silver freeze wire shelves
- 8' cord and plug
- Adjustable Electronic Temp Control From 80°F To 180°F
- R-290 refrigerant
- Hot gas condensate evaporator
- Adaptive defrost
- Refrigerator capable of maintaining product temperature 36°F to 38°F
- Accepts Carts: 26 1/2" w x 28" D x 65" H (cart not included)
- Three year parts and labour warranty and an additional 4 year compressor parts warranty.

Specifications and Prices

Model	Description	V/Hz/Ph	Amps	Volume Cu. Ft.	Shelf Capacity Sq. Ft.	# of Shelves	Unit H.P.	Btu/Hr System Cap	Ship Weight	Nema Plug	List Price
DSLRRT1-S	One section, Full height solid door	115/60/1	8.5	38.69	N/A	N/A	3/4	4950	448 lbs	5-15P	\$32,970
DSLRRT2-S	Two section, Full height solid door	115/60/1	8.5	78.49	N/A	N/A	3/4	4950	716 lbs	5-15P	\$45,190
DSLHRT1-S	One section, Full height solid door	208-240/60/1	6.8	38.7	N/A	N/A	N/A	1500	388 lbs	6-20P	\$32,385
DSLHRT2-S	Two section, Full height solid door	208-240/60/1	13	72.4	N/A	N/A	N/A	3000	662 lbs	6-20P	\$45,105

Specification Line® Reach-Ins accessories and modifications can be found on page 15.

Specifications and prices subject to change without notice.

Accessory Number	Description	Available on Models	List Price
DSL5B1	STAINLESS STEEL BACK -1 SECTION	R1, RI1	\$325
DSL5B2	STAINLESS STEEL BACK -2 SECTION	R2, RI2	\$465
DSLTS	TRIM STRIPS	R, RI, PT, RT	\$480
DSLPP	PRISON PACKAGE	R, RI, PT, RT	\$2,000
DSLKPRI1	KICK PLATE - 1 SECTION REACH-IN	R, RT	\$300
DSLKPRI2	KICK PLATE - 2 SECTION REACH-IN	R, RT	\$445
DSLKPPT1	KICK PLATE - 1 SECTION PASS-THRU	PT	\$300
DSLKPPT2	KICK PLATE - 2 SECTION PASS-THRU	PT	\$445
DSLCAST12	6" RIDE HEIGHT CASTERS (1 OR 2 SECTION)	R, PT	\$315
DSLCAST3	6" RIDE HEIGHT CASTERS (3 SECTION)	R, PT	\$465
DSLFF12	6" STAINLESS STEEL FLANGED FEET (1 OR 2 SECTION)	R, PT	\$695
DSLFF3	6" STAINLESS STEEL FLANGED FEET (3 SECTION)	R, PT	\$995
DSLFS1	SILVER FREEZE SHELF (CHROME-STYLE)	R, PT - NON-HEATED	\$385
DSLSS	STAINLESS STEEL SHELF	R1, PT1	\$465
DSLFS2	SILVER FREEZE SHELF, FOR LEFT OR RIGHT DOOR (CHROME-STYLE)	R2, PT2 - NON-HEATED	\$385
DSLFS3	SILVER FREEZE SHELF, FOR CENTER DOOR (CHROME-STYLE) - THREE SECTION ONLY	R3	\$385
DSLTRAY	TRAY SLIDE SET - (1) 18" X 26" OR (2) 14" X 18" OR (2) 12" X 20" PANS	R, PT	\$475
DSLLOUV	LOUVERED UPPER CASE ENDS - EACH	R, RI, PT, RT	\$770
DSL3CAST	3" CASTERS, IN LIEU OF STANDARD 6" STAINLESS STEEL LEGS, NO CHARGE WHEN SPECIFIED ON ORDER (NC)	R, PT	\$435
NA	HALF-HEIGHT SOLID STAINLESS STEEL DOOR PAIR IN LIEU OF ONE FULL HEIGHT HINGED SOLID DOOR	R, RI, PT, RT	\$2,090
NA	FULL HEIGHT GLASS DOOR IN LIEU OF FULL HEIGHT STAINLESS STEEL DOOR	R, RI, PT, RT	\$2,125
NA	DOOR HINGING: ON LEFT AT FACTORY (NC)	R, RI, PT, RT	
NA	DOOR HINGING: FIELD-REVERSIBLE	R, RI, PT, RT	
NA	DOOR HINGING: ON RIGHT AT FACTORY (NC)	R, RI, PT, RT	
NA	DOOR HINGING: LEFT DOOR HINGED & CENTER DOORS HINGED ON LEFT, RIGHT DOOR HINGED ON RIGHT AT FACTORY (NC)	R, RI, PT, RT	
NA	CONTROL/KITCHEN SIDE DOOR HINGING: ON LEFT AT FACTORY (NC)	PT, RT	
NA	CONTROL/KITCHEN SIDE DOOR HINGING: FIELD-REVERSIBLE	PT, RT	
NA	REAR/SERVER SIDE DOOR HINGING: ON LEFT ON REAR AT FACTORY (NC)	PT, RT	
NA	REAR/SERVER SIDE DOOR HINGING: FIELD-REVERSIBLE	PT, RT	

MODEL KEY

R= REACH-INS

DT = DUAL TEMPS

RT = ROLL-THRUS

PT = PASS-THRUS

RI = ROLL-INS

6000XL REACH-INS®

Reach-in Refrigerators and Freezers



6000XL REACH-IN REFRIGERATORS AND FREEZERS

Product Information

- Stainless steel front shroud and sides
- Stainless steel sides
- Seamless ABS interior liner
- Easy to adjust chrome shelves
- GreenGenius R290 top mount refrigeration system
- Easy to read digital thermometer with visual high/low temp alarms
- Energy efficient door gaskets removable without tools
- Meets NSF requirements
- Edgemount door hinges with self-closing doors
- Field reversible door hinging
- Standard with robust door lock
- Interior accepts 18" x 26" sheet pans on shelves or on optional tray racks
- A maximum 10 foot cord and plug are supplied standard
- All units are standard with 5" polyurethane swivel locking casters for easy cleaning
- Three year parts and labor and additional four year compressor parts warranty



6025XL-S

Specifications and Prices

Model	Description	Width	Amps	Volume Cu. Ft.	Shelf Capacity Sq. Ft.	# of Shelves	Unit H.P.	Btu/Hr System Cap	Ship Weight	Nema Plug	List Price
6025XL-S	One section, Full height door	25.50"	4.2	20	15.1	3	0.22	1754	274	5-15P	\$11,250
6025XL-SH	One section, Half height doors	25.50"	4.2	20	15.1	3	0.22	1754	274	5-15P	\$12,485
6051XL-S	Two section, Full height doors	51.00"	6.0	43.5	33.2	6	0.33	2167	451	5-15P	\$14,960
6051XL-SH	Two section, Half height doors	51.00"	6.0	43.5	33.2	6	0.33	2167	451	5-15P	\$16,890
6125XL-S	One section, Full height door	25.50"	5.5	20	15.1	3	0.55	1759	274	5-15P	\$14,050
6125XL-SH	One section, Half height doors	25.50"	5.5	20	15.1	3	0.55	1759	274	5-15P	\$14,845
6151XL-S	Two section, Full height doors	51.00"	10.0	43.5	33.2	6	0.68	2495	451	5-15P	\$18,920
6151XL-SH	Two section, Full height doors	51.00"	10.0	43.5	33.2	6	0.68	2495	451	5-15P	\$20,055

Accessories

Accessory Number	Description	List Price
AS3978270	Additional shelf 1 Door	\$255
AS3977994	TR8B tray rack	\$675
G3234791A	6" black legs	\$295
G3234452A	6" flanged feet	\$1,210
AS3978277	Left side additional shelf 2 Door	\$255
AS3978278	Right side additional shelf 2 Door	\$255

Specifications and prices subject to change without notice.

Blast Chillers/Shock Freezers

Blast Chiller/Shock Freezers



BLAST CHILLER/SHOCK FREEZER

Product Information

- 4 different cycles for blast chilling and 4 for shock freezing
- Hot gas defrost
- Capacitive touch control
- Functions available: Blast chill, shock freeze, shock freeze continuous, thawing, ice cream cycle, programs storable
- HACCP report alarms
- Stainless steel construction
- Upload and download data with USB
- Three-year parts and labor warranty and an additional 2-year compressor parts warranty



CV5E

Specifications and Prices

MODEL NUMBER	DESCRIPTION	L	OVERALL D	H	CHILL CAPACITY	FREEZE CAPACITY	CONDENSING UNIT	SHIP WEIGHT	LIST PRICE
CV5E	Blast Chiller/Shock Freezer	33.07"	28.35"	37"	27lbs	44lbs	Self contained	278	\$37,540
CV10E	Blast Chiller/Shock Freezer	33.07"	30.71"	58.98"	55lbs	77lbs	Self contained	419	\$47,805
CV15E	Blast Chiller/Shock Freezer	33.07"	34.64"	76.85"	110lbs	143lbs	Self contained	624	\$66,540
CV15E-2	Blast Chiller/Shock Freezer	33.07"	49.21"	76.85"	121lbs	154lbs	Self contained	670	\$75,300



CV10E

Accessories and Modifications

DESCRIPTION	LIST PRICE
Sanitizing ozone cycle *6-8 WEEK LEAD TIME.	\$3,765
Caster Kit AS000-AXD-0062 for CV15E & CV15E-2	\$835
AS3465435 Adapter mount for oven	\$1,935
ASBCP00227 Additional Probe	\$645
Caster Kit AS000-AXD-0063 for CV5E & CV10E	\$885



CV15E

CONVOCHILL® BLAST CHILLER/SHOCK FREEZER

Specifications and prices subject to change without notice.

GARLAND
CANADA
WELBILT DISTRIBUTION

UNDERCOUNTER / FLAT TOP REFRIGERATED/FREEZER BASES

4400/4500 Series

Flat Top Units



4400NP - FRONT-BREATHING SELF-CONTAINED FLAT TOP REFRIGERATED BASES

Product Information

4400NP Series

- All 4400NP Series units are 100% front breathing, which allows the unit to be pushed against a wall or built into a cabinet, or an existing lineup.
- Durable, rugged stainless-steel sides, top and front
- Features Delfield's exclusive ABS interior (on sides). ABS is extremely durable – it won't dent, chip or corrode and is backed by a limited lifetime warranty.
- "D" prefix models feature Delfield's drawer system. Drawers are backed by a lifetime warranty on the track assembly.
- Bent in full length handle on doors and drawers.
- Standard on 5" casters for easy cleaning and installation
- One wire shelf standard, installed per door section.
- ACT solid state electronic control
- Environmentally friendly R290 refrigerant
- High density foamed in place, environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low.
- 10' cord and plug supplied
- Three-year parts and labor warranty and a seven-year compressor parts warranty.



4424NP

Options & Accessories

- 18" wide single tier overshef
- Stainless steel finish on back
- Cutting Boards (Composite or Poly)
- Plastic laminate on front
- Additional wire shelves
- 3" casters, 4" ride height available
- Door lock
- Exterior thermometer (some models excluded)

Specifications and Prices

MODEL NUMBER	DESCRIPTION	DIMENSIONS			STOR. CU. FT.	H.P.	AMPS	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
		L	D	H								
SINGLE SECTION WITH DOORS												
4424NP	One Door	24.13"	31.5"	36"	6.35	0.2	4.8	115	5-15P	213	110	\$6,645
4427NP	One Door	27.13"	31.5"	36"	7.35	0.2	4.8	115	5-15P	223	110	\$7,320
4432NP	One Door	32.13"	31.5"	36"	9.01	0.2	4.8	115	5-15P	266	110	\$9,160
4448NP	Two Doors	48.13"	31.5"	36"	14.23	0.2	4.8	115	5-15P	316	110	\$9,840
4460NP	Two Doors	60.13"	31.5"	36"	18.32	0.2	4.8	115	5-15P	411	110	\$11,345
4472NP	Three Doors	72.13"	31.5"	36"	22.11	0.2	4.8	115	5-15P	461	110	\$13,660
SINGLE SECTION WITH DRAWERS												
D4424NP	Two Drawers	24.13"	31.5"	36"	6.35	0.2	4.8	115	5-15P	235	110	\$8,510
D4427NP	Two Drawers	27.13"	31.5"	36"	7.35	0.2	4.8	115	5-15P	245	110	\$9,180
D4432NP	Two Drawers	32.13"	31.5"	36"	9.01	0.2	4.8	115	5-15P	348	110	\$11,345
D4448NP	Four Drawers	48.13"	31.5"	36"	14.23	0.2	4.8	115	5-15P	398	110	\$13,575
D4460NP	Four Drawers	60.13"	31.5"	36"	18.32	0.2	4.8	115	5-15P	495	110	\$15,735
D4472NP	Six Drawers	72.13"	31.5"	36"	22.11	0.2	4.8	115	5-15P	545	110	\$19,260

Accessories can be found on page 24-25.

4400NP - FRONT-BREATHING SELF-CONTAINED WORK TOP REFRIGERATED BASES

Product Information

4400NP Series

- All 4400NP Series units are 100% front breathing, which allows the unit to be pushed against a wall or built into a cabinet, or an existing lineup.
- Durable, rugged stainless-steel sides, top and front
- Features Delfield's exclusive ABS interior (on sides). ABS is extremely durable – it won't dent, chip or corrode and is backed by a limited lifetime warranty.
- "D" prefix models feature Delfield's drawer system. Drawers are backed by a lifetime warranty on the track assembly.
- Bent in full length handle on doors and drawers.
- Standard on 5" casters for easy cleaning and installation
- One wire shelf standard, installed per door section.
- ACT solid state electronic control
- Environmentally friendly R290 refrigerant
- High density foamed in place, environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low.
- 10' cord and plug supplied
- Three-year parts and labor warranty and a seven-year compressor parts warranty.



ST4424NP

Options & Accessories

- 18" wide single tier overself
- Stainless steel finish on back
- Cutting Boards (Composite or Poly)
- Plastic laminate on front
- Additional wire shelves
- 3" casters, 4" ride height available
- Door lock
- Exterior thermometer (some models excluded)

Specifications and Prices

MODEL NUMBER	DESCRIPTION	DIMENSIONS			STOR. CU. FT.	H.P.	AMPS	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
		L	D	H								
SINGLE SECTION WITH DOORS WITH BACKSPLASH												
ST4424NP	One Door	24.13"	31.5"	36"	6.35	0.2	4.8	115	5-15P	213	110	\$7,305
ST4427NP	One Door	27.13"	31.5"	36"	7.35	0.2	4.8	115	5-15P	223	110	\$7,970
ST4432NP	One Door	32.13"	31.5"	36"	9.01	0.2	4.8	115	5-15P	266	110	\$9,890
ST4448NP	Two Doors	48.13"	31.5"	36"	14.23	0.2	4.8	115	5-15P	316	110	\$10,570
ST4460NP	Two Doors	60.13"	31.5"	36"	18.32	0.2	4.8	115	5-15P	411	110	\$12,005
ST4472NP	Three Doors	72.13"	31.5"	36"	22.11	0.2	4.8	115	5-15P	461	110	\$14,395
SINGLE SECTION WITH DRAWERS WITH BACKSPLASH												
STD4424NP	Two Drawers	24.13"	31.5"	36"	6.35	0.2	4.8	115	5-15P	235	110	\$9,235
STD4427NP	Two Drawers	27.13"	31.5"	36"	7.35	0.2	4.8	115	5-15P	245	110	\$9,835
STD4448NP	Four Drawers	32.13"	31.5"	36"	14.23	0.2	4.8	115	5-15P	398	110	\$14,305
STD4460NP	Four Drawers	48.13"	31.5"	36"	18.32	0.2	4.8	115	5-15P	495	110	\$16,395
STD4472NP	Six Drawers	72.13"	31.5"	36"	22.11	0.2	4.8	115	5-15P	545	110	\$19,845

Accessories can be found on page 24-25.

Specifications and prices subject to change without notice.

4500NP - FRONT-BREATHING SELF-CONTAINED FLAT TOP FREEZER BASES

Product Information

4500NP Series

- All 4500NP Series units are 100% front breathing, which allows the unit to be pushed against a wall or built into a cabinet, or an existing lineup.
- Durable, rugged stainless-steel sides, top and front
- Features Delfield's exclusive ABS interior (on sides). ABS is extremely durable – it won't dent, chip or corrode and is backed by a limited lifetime warranty.
- "D" prefix models feature Delfield's drawer system. Drawers are backed by a lifetime warranty on the track assembly.
- Bent in full length handle on doors and drawers.
- Standard on 5" casters for easy cleaning and installation
- One wire shelf standard, installed per door section.
- ACT solid state electronic control
- Environmentally friendly R290 refrigerant
- High density foamed in place, environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low.
- 10' cord and plug supplied
- Three-year parts and labor warranty and a seven-year compressor parts warranty



4527NP

Options & Accessories

- 18" wide single tier overshef
- Stainless steel finish on back
- Cutting Boards (Composite or Poly)
- Plastic laminate on front
- Additional wire shelves
- 3" casters, 4" ride height available
- Door lock
- Exterior thermometer (some models excluded)
- LED Lights (door units only)
- Lower height casters
- Stacking Collar (on single section units)

Specifications and Prices

MODEL NUMBER	DESCRIPTION	DIMENSIONS			STOR. CU. FT.	H.P.	AMPS	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
		L	D	H								
SINGLE SECTION WITH DOORS												
4527NP	One Door	27.13"	31.5"	36"	7.14	0.35	5.2	115	5-15P	223	110	\$8,690
4532NP	One Door	32.13"	31.5"	36"	8.8	0.35	5.2	115	5-15P	266	110	\$10,350
4548NP	Two Doors	48.13"	31.5"	36"	14.02	0.35	5.2	115	5-15P	316	110	\$11,520
4560NP	Two Doors	60.13"	31.5"	36"	17.63	0.45	5.7	115	5-15P	411	110	\$13,925
SINGLE SECTION WITH DRAWERS												
D4527NP	Two Drawers	27.13"	31.5"	36"	7.14	0.35	5.2	115	5-15P	245	110	\$10,810
D4532NP	Two Drawers	32.13"	31.5"	36"	8.8	0.35	5.2	115	5-15P	348	110	\$12,985
D4560NP	Four Drawers	60.13"	31.5"	36"	17.77	0.45	5.7	115	5-15P	495	110	\$18,385
SINGLE SECTION WITH DOORS WITH BACKSPLASH												
ST4527NP	One Door	27.13"	31.5"	36"	7.14	0.35	5.2	115	5-15P	223	110	\$8,995
ST4532NP	One Door	32.13"	31.5"	36"	8.8	0.35	5.2	115	5-15P	266	110	\$10,720
ST4548NP	Two Doors	48.13"	31.5"	36"	14.02	0.35	5.2	115	5-15P	316	110	\$13,440
ST4560NP	Two Doors	60.13"	31.5"	36"	17.63	0.45	5.7	115	5-15P	411	110	\$16,020
SINGLE SECTION WITH DRAWERS WITH BACKSPLASH												
STD4527NP	Two Drawers	27.13"	31.5"	36"	7.14	0.35	5.2	115	5-15P	245	110	\$11,015
STD4532NP	Two Drawers	32.13"	31.5"	36"	8.8	0.35	5.2	115	5-15P	348	110	\$13,795
STD4560NP	Four Drawers	60.13"	31.5"	36"	17.77	0.45	5.7	115	5-15P	495	110	\$20,055

Accessories can be found on page 24-25.

Specifications and prices subject to change without notice.

ACCESSORIES

Accessory Number	Description	List Price
AS000-AQS-004B	Overshelf, Single Tier, 24Lx16Wx20H	\$2,665
AS000DAQS-004C	Overshelf, Double Tier, 24Lx16Wx20H-14H	\$5,245
AS000-AQS-004D	Overshelf, Single Tier, 24Lx16Wx20H	\$2,580
AS000DAQS-004F	Overshelf, Double Tier, 24Lx16Wx17H-10H	\$5,140
AS000-AQS-004E	Overshelf, Single Tier, 24Lx16Wx17H	\$2,625
AS000-AQS-004G	Overshelf, Single Tier, 24Lx16Wx10H	\$2,520
4424BRDP10	Poly Cutting Board - 24"	\$280
4427BRDP10	Poly Cutting Board - 27"	\$320
4432BRDP10	Poly Cutting Board - 32"	\$375
4448BRDP10	Poly Cutting Board - 48"	\$560
4460BRDP10	Poly Cutting Board - 60"	\$705
4472BRDP10	Poly Cutting Board - 72"	\$845
4424BRDC10	Composite Cutting Board - 24"	\$400
4427COMPM	Composite Cutting Board - 27"	\$445
4432COMPM	Composite Cutting Board - 32"	\$525
4448COMPM	Composite Cutting Board - 48"	\$805
4460COMPM	Composite Cutting Board - 60"	\$1,000
4472COMPM	Composite Cutting Board - 72"	\$1,220
AS000-D0T-003X	24" Stacking Collar	\$1,070
AS000-D0T-003Y	27" Stacking Collar	\$1,205
AS000-D0T-003Z	32" Stacking Collar	\$1,335

Specifications and prices subject to change without notice.

Accessory Number	Description	List Price
AS000-AXD-003X	32" Work Height (Uses The 000-Axf-003F Casters)	\$550
AS000-AXD-003F	4" load height casters for 27" and 32"	\$550
AS000-AXD-003G	4" load height casters for 48" thru 72"	\$725
AS000-B4V-003C	SS back panel - 24ga 430 rolled finish - 27"	\$655
AS000-B4V-003D	SS back panel - 24ga 430 rolled finish - 32"	\$800
AS000-B4V-003E	SS back panel - 24ga 430 rolled finish - 48"	\$1,260
AS000-B4V-003J	SS back panel - 24ga 430 rolled finish - 60"	\$1,500
AS000-B4V-004B	SS back panel - 24ga 430 rolled finish - 72"	\$1,880
44THERM	Exterior thermometer (dial in door on 27" and 32" work height models, digital on others)	\$960
AS3978274	Extra shelf per section (27")	\$190
AS3978276	Extra shelf per section (32")	\$190
AS3978273	Extra Shelf Per Section (24", 48" And 72")	\$190
AS3978275	Extra shelf per section (60")	\$190
44DRAWER	One section drawers in place of a door	\$3,385
44LOCK	Door or drawer lock (all or nothing)	\$645 per section
4427TRAY	Tray slides - fold down Shelley design (27")	\$865
4432TRAY	Tray slides - fold down Shelley design (32")	\$1,025
4448TRAY	Tray slides - fold down Shelley design (48")	\$1,595
4460TRAY	Tray slides - fold down Shelley design (60")	\$2,040
4472TRAY	Tray slides - fold down Shelley design (72")	\$2,420
COVPEDAL	Foot pedal	\$1,080
44LIGHT	LED interior light	\$605

18600BUCMP/18600BSTMP

Refrigerated Work Tables With and Without Backsplash



18600BUCMP - REFRIGERATED WORK TABLES

18600BSTMP - REFRIGERATED WORK TABLES WITH BACKSPLASH

Product Information

- Stainless steel exterior is standard. Optional laminate facing is available
- Compressor is located on right
- Finished stainless steel ends
- 18-gauge stainless steel top
- BSTMP models indicate a 4" high backsplash
- Environmentally friendly R290 refrigerant
- Standard on casters
- Three year parts and labor warranty and an additional 2 year compressor parts warranty.

Specifications and Prices

MODEL NUMBER	# OF DOORS	OVERALL L	OVERALL D	OVERALL H	STOR CU. FT.	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
REFRIGERATED WORK TABLES												
Self-Contained												
18648BUCMP	(1) 27"	48"	31.5"	36"	10.23	0.20	2.9	115	5-15P	390	110	\$12,830
18660BUCMP	19" & 27"	60"	31.5"	36"	15.12	0.20	2.9	115	5-15P	435	110	\$14,975
18672BUCMP	(2) 27"	72"	31.5"	36"	18.10	0.20	2.9	115	5-15P	495	110	\$17,205
18691BUCMP	(2) 27" & 19"	91"	31.5"	36"	24.48	0.25	4.8	115	5-15P	535	110	\$21,105
18699BUCMP	(3) 27"	99"	31.5"	36"	27.46	0.25	4.8	115	5-15P	594	110	\$22,140
186114BUCMP	(3) 32"	114"	31.5"	36"	37.24	0.33	6.3	115	5-15P	685	110	\$25,505
REFRIGERATED WORK TABLES WITH BACKSPLASH												
Self-Contained												
18648BSTMP	(1) 27"	48"	31.5"	40"	10.23	0.20	2.9	115	5-15P	390	110	\$13,340
18660BSTMP	19" & 27"	60"	31.5"	40"	15.12	0.20	2.9	115	5-15P	435	110	\$15,375
18672BSTMP	(2) 27"	72"	31.5"	40"	18.10	0.20	2.9	115	5-15P	495	110	\$17,880
18691BSTMP	(2) 27" & 19"	91"	31.5"	40"	24.48	0.25	4.8	115	5-15P	535	110	\$22,590
18699BSTMP	(3) 27"	99"	31.5"	40"	27.46	0.25	4.8	115	5-15P	594	110	\$23,735
186114BSTMP	(3) 32"	114"	31.5"	40"	37.24	0.33	6.3	115	5-15P	685	110	\$27,330

18600BUCMP AND 18600BSTMP accessories and modifications can be found on page 28.




18648BUCMP

WORK TABLE ACCESSORIES

BUCMP & BSTMP MODELS

Stainless steel back (per linear inch) -----	\$35
Laminate facing for BUCMP & BSTMP units; per linear inch -----	\$25
(Laminate facing for rear of BUCMP & BSTMP units requires stainless steel back)	
Composite Cutting Board (20" wide x 1/2" thick) (BUCMP & BSTMP)	
48" -----	\$2,690
60" -----	\$3,455
72" -----	\$3,850
91" -----	\$5,000
99" -----	\$5,380
114" -----	\$5,455
Poly Cutting Board (BUCMP & BSTMP)	
48" (20" wide x 1/2" thick) -----	\$1,330
60" (20" wide x 1/2" thick) -----	\$1,715
72" (20" wide x 1/2" thick) -----	\$1,910
91" (20" wide x 1/2" thick) -----	\$2,480
99" (20" wide x 1/2" thick) -----	\$2,670
114" (20" wide x 1/2" thick) -----	\$3,055
Drawers 19", 2 high, hold one 12" x 20" x 6" deep pan -----	\$3,975
per drawer (pans supplied by others) -----	
Drawers 19", 3 high, hold one 12" x 20" x 4" deep pan -----	\$5,095
per drawer (pans supplied by others) -----	
Drawers 27", 2 high, hold two 12" x 20" x 6" deep pans -----	\$4,185
per drawer (pans supplied by others) -----	
Drawers 27", 3 high, hold two 12" x 20" x 4" deep pans -----	\$5,315
per drawer (pans supplied by others) -----	
Drawers 32", 2 high, hold two 12" x 20" x 6" deep pans -----	\$4,185
per drawer (pans supplied by others) -----	
Drawers 32", 3 high, hold two 12" x 20" x 4" deep pans -----	\$5,330
per drawer (pans supplied by others) -----	
TR9B tray rack (base support style for 18" x 26" trays; 2" centers) (BUCMP & BSTMP) (3977985) -----	\$695

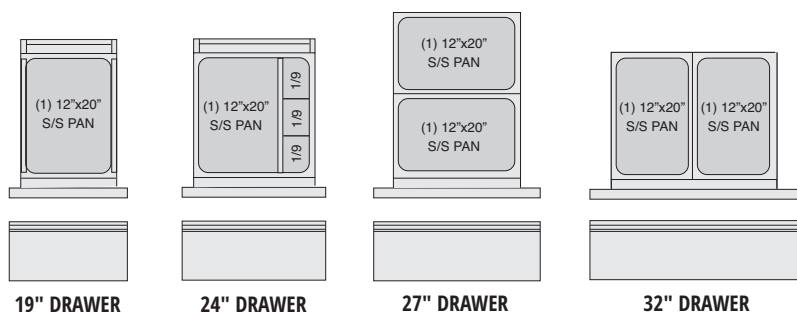Drawer configurations for BUCMP and BSTMP series.

Specifications and prices subject to change without notice.

Tel: 905-624-1419 • 888-442-7526

Fax: 905-624-1851 • 800-361-2724

For more information, visit www.garlandcanada.ca

4400NP Series

Salad Top Compact Prep Tables

4400RP

Air Over Rail Prep Tables

18000PTBMP

Standard Pizza Prep Tables

18600PTLP

LiquiTec® Pizza Prep Tables

18600PDLP

Dual Rail Pizza Prep Tables

CTP-NBP

Counter Top Prep Rails



4400NP - SALAD TOP PREP TABLES



4427NP-6
Shown with optional hinged cover



4460NP-12

**10-year Warranty
on Delfield's Full
Extension Plus Drawer
System Track!**



Product Information

- Patented air screen ensures product stays cold without drying it out
- All 4400 Series units are 100% front breathing, which allows the unit to be pushed against a wall or built into a cabinet or an existing line up
- Durable, rugged stainless steel sides, top and front
- Features Delfield's exclusive Delrite ABS interior (on sides). ABS is extremely durable - it won't dent, chip or corrode and is backed by a limited lifetime warranty
- Delfield supplies 1/6 size pans and positive placement adapter bars for top opening
- Dual level pan brackets allow the pans to be lowered an additional inch in the unit without tools to provide additional pan temperature holding performance (not available for eight pan capacity models)
- Salad top refrigerators are standard with 10" wide, dishwasher safe polyethylene cutting board
- "D" prefix models feature Delfield's new drawer system. Lifetime warranty on Delfield's full extension plus drawer system track.
- Environmentally friendly R290 refrigerant
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Integral full length door/drawer handle
- Standard on 5" casters for easy cleaning and installation
- 6' cord and plug supplied
- One epoxy coated wire shelf standard, installed per door section
- "ST" prefix models have a 4" stainless steel backsplash
- Electromechanical control
- 3 year parts and labor warranty and an additional 4 year compressor parts warranty.

Specifications and Prices

MODEL NUMBER	DESCRIPTION	OVERALL			VOL. CU. FT.	1/6 PAN CAP.	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
		L	D	H									
27" SALAD TOP REFRIGERATOR BASES													
4427NP-6	one door	27"	31.5"	36"	8.2	6	.35	4.0	115	5-15P	223	110	\$7,250
D4427NP-6	two drawers	27"	31.5"	36"	8.2	6	.35	4.0	115	5-15P	245	110	\$10,175
4427NP-8	one door	27"	31.5"	36"	8.2	8	.35	4.0	115	5-15P	223	110	\$7,880
D4427NP-8	two drawers	27"	31.5"	36"	8.2	8	.35	4.0	115	5-15P	223	110	\$12,345
ST4427NP-6	one door	27"	31.5"	36"	8.2	6	.35	4.0	115	5-15P	223	110	\$7,530
STD4427NP-6	two drawers	27"	31.5"	36"	8.2	6	.35	4.0	115	5-15P	245	110	\$10,455
ST4427NP-8	one door	27"	31.5"	36"	8.2	8	.35	4.0	115	5-15P	240	110	\$9,885
STD4427NP-8	two drawers	27"	31.5"	36"	8.2	8	.35	4.0	115	5-15P	240	110	\$12,515
48" SALAD TOP REFRIGERATOR BASES													
4448NP-6	two doors	48"	31.5"	36"	16.0	6	.35	4.0	115	5-15P	316	110	\$9,815
D4448NP-6	four drawers	48"	31.5"	36"	16.0	6	.35	4.0	115	5-15P	398	110	\$15,135
4448NP-8	two doors	48"	31.5"	36"	16.0	8	.35	4.0	115	5-15P	316	110	\$10,050
D4448NP-8	four drawers	48"	31.5"	36"	16.0	8	.35	4.0	115	5-15P	398	110	\$15,370
4448NP-12	two doors	48"	31.5"	36"	16.0	12	.35	4.0	115	5-15P	316	110	\$10,545
D4448NP-12	four drawers	48"	31.5"	36"	16.0	12	.35	4.0	115	5-15P	398	110	\$16,220
ST4448NP-6	two doors	48"	31.5"	36"	16.0	6	.35	4.0	115	5-15P	316	110	\$10,095
STD4448NP-6	four drawers	48"	31.5"	36"	16.0	6	.35	4.0	115	5-15P	398	110	\$15,420
ST4448NP-8	two doors	48"	31.5"	36"	16.0	8	.35	4.0	115	5-15P	316	110	\$10,335
STD4448NP-8	four drawers	48"	31.5"	36"	16.0	8	.35	4.0	115	5-15P	398	110	\$15,385
60" SALAD TOP REFRIGERATOR BASES													
4460NP-8	two doors	60"	31.5"	36"	20.2	8	.35	6.0	115	5-15P	411	110	\$12,590
D4460NP-8	four drawers	60"	31.5"	36"	20.2	8	.35	6.0	115	5-15P	495	110	\$17,920
4460NP-12	two doors	60"	31.5"	36"	20.2	12	.35	6.0	115	5-15P	411	110	\$13,170
D4460NP-12	four drawers	60"	31.5"	36"	20.2	12	.35	6.0	115	5-15P	495	110	\$18,515
ST4460NP-8	two doors	60"	31.5"	36"	20.2	8	.35	6.0	115	5-15P	411	110	\$13,145
STD4460NP-8	four drawers	60"	31.5"	36"	20.2	8	.35	6.0	115	5-15P	495	110	\$17,950
ST4460NP-12	two doors	60"	31.5"	36"	20.2	12	.35	6.0	115	5-15P	411	110	\$13,715
STD4460NP-12	four drawers	60"	31.5"	36"	20.2	12	.35	6.0	115	5-15P	495	110	\$18,525
64" SALAD TOP REFRIGERATOR BASES													
4464NP-8	two doors	64"	31.5"	36"	21.6	8	.35	6.0	115	5-15P	421	110	\$12,800
D4464NP-8	four drawers	64"	31.5"	36"	21.6	8	.35	6.0	115	5-15P	522	110	\$18,540
4464NP-12	two doors	64"	31.5"	36"	21.6	12	.35	6.0	115	5-15P	421	110	\$13,915
D4464NP-12	four drawers	64"	31.5"	36"	21.6	12	.35	6.0	115	5-15P	522	110	\$19,270
4464NP-16	two doors	64"	31.5"	36"	21.6	16	.35	6.0	115	5-15P	421	110	\$14,665
D4464NP-16	four drawers	64"	31.5"	36"	21.6	16	.35	6.0	115	5-15P	522	110	\$20,025
ST4464NP-8	two doors	64"	31.5"	36"	21.6	8	.35	6.0	115	5-15P	421	110	\$13,245
STD4464NP-8	four drawers	64"	31.5"	36"	21.6	8	.35	6.0	115	5-15P	522	110	\$18,455
ST4464NP-12	two doors	64"	31.5"	36"	21.6	12	.35	6.0	115	5-15P	421	110	\$13,955
STD4464NP-12	four drawers	64"	31.5"	36"	21.6	12	.35	6.0	115	5-15P	522	110	\$19,160
72" SALAD TOP REFRIGERATOR BASES													
4472NP-12	three doors	72"	31.5"	36"	24.8	12	.35	6.0	115	5-15P	461	110	\$15,035
D4472NP-12	six drawers	72"	31.5"	36"	24.8	12	.35	6.0	115	5-15P	545	110	\$21,990
4472NP-18	three doors	72"	31.5"	36"	24.8	18	.35	6.0	115	5-15P	461	110	\$15,370
D4472NP-18	six drawers	72"	31.5"	36"	24.8	18	.35	6.0	115	5-15P	545	110	\$22,335
ST4472NP-12	three doors	72"	31.5"	36"	24.8	12	.35	6.0	115	5-15P	461	110	\$15,220
STD4472NP-12	six drawers	72"	31.5"	36"	24.8	12	.35	6.0	115	5-15P	545	110	\$21,990
ST4472NP-18	three doors	72"	31.5"	36"	24.8	18	.35	6.0	115	5-15P	461	110	\$16,200
STD4472NP-18	six drawers	72"	31.5"	36"	24.8	18	.35	6.0	115	5-15P	545	110	\$23,005

4400NP Series accessories and modifications can be found on page 35.

Specifications and prices subject to change without notice.

4400NPM - MEGA TOP PREP TABLES

Product Information

- Patented air screen design ensures product stays cold without drying it out
- All 4400 Series units are 100% front breathing, which allows the unit to be pushed against a wall or built into a cabinet or an existing line up
- Durable, rugged stainless steel sides, top and front
- Features Delfield's exclusive Delrite ABS interior (on sides). ABS is extremely durable - it won't dent, chip or corrode and is backed by a limited lifetime warranty
- Delfield supplies 1/6 size pans and positive placement adapter bars for top opening
- Dual level pan brackets allow the pans to be lowered an additional inch in the unit without tools to provide additional pan temperature holding performance (not available for twelve pan capacity models)
- Mega top refrigerators are standard with 8" wide, dishwasher safe polyethylene cutting board
- "D" prefix models feature Delfield's exclusive new drawer system. Lifetime warranty on Delfield's full extension plus drawer system track.
- Environmentally friendly R290 refrigerant
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Integral full length door/drawer handle
- Standard on 5" casters for easy cleaning and installation
- 6' cord and plug supplied
- One epoxy coated wire shelf standard, installed per door section
- "ST" prefix models have a 4" stainless steel backsplash
- Electromechanical control
- 3 year parts and labor warranty and an additional 4 year compressor parts warranty.



4432NP-12M



4460N-24M

Specifications and Prices

MODEL NUMBER	DESCRIPTION	OVERALL L	OVERALL D	OVERALL H	VOL. CU. FT.	1/6 PAN CAP.	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
27" MEGA TOP FRONT BREATHERS													
4427NP-9M	one door	27"	31.5"	36"	8.2	9	.35	4.0	115	5-15P	223	110	\$8,695
D4427NP-9M	two drawers	27"	31.5"	36"	8.2	9	.35	4.0	115	5-15P	245	110	\$11,410
4427NP-12M	one door	27"	31.5"	36"	8.2	12	.35	4.0	115	5-15P	223	110	\$8,640
D4427NP-12M	two drawers	27"	31.5"	36"	8.2	12	.35	4.0	115	5-15P	245	110	\$11,230
32" MEGA TOP FRONT BREATHERS													
4432NP-12M	one door	32"	31.5"	36"	10.1	12	.35	4.0	115	5-15P	245	110	\$10,635
D4432NP-12M	two drawers	32"	31.5"	36"	10.1	12	.35	4.0	115	5-15P	293	110	\$13,305
48" MEGA TOP FRONT BREATHERS													
4448NP-6M	two doors	48"	31.5"	36"	16.0	6	.35	4.0	115	5-15P	316	110	\$10,430
D4448NP-6M	four drawers	48"	31.5"	36"	16.0	6	.35	4.0	115	5-15P	398	110	\$15,750
4448NP-12M	two doors	48"	31.5"	36"	16.0	12	.35	4.0	115	5-15P	316	110	\$11,725
D4448NP-12M	four drawers	48"	31.5"	36"	16.0	12	.35	4.0	115	5-15P	398	110	\$17,050
4448NP-18M	two doors	48"	31.5"	36"	16.0	18	.35	4.0	115	5-15P	316	110	\$12,970
D4448NP-18M	four drawers	48"	31.5"	36"	16.0	18	.35	4.0	115	5-15P	398	110	\$18,165
ST4448NP-6M	two doors	48"	31.5"	36"	16.0	6	.35	4.0	115	5-15P	316	110	\$10,725
STD4448NP-6M	four drawers	48"	31.5"	36"	16.0	6	.35	4.0	115	5-15P	398	110	\$16,050
ST4448NP-12M	two doors	48"	31.5"	36"	16.0	12	.35	4.0	115	5-15P	316	110	\$12,015
STD4448NP-12M	four drawers	48"	31.5"	36"	16.0	12	.35	4.0	115	5-15P	398	110	\$17,340
60" MEGA TOP FRONT BREATHERS													
4460NP-12M	two doors	60"	31.5"	36"	20.2	12	.35	6.0	115	5-15P	411	110	\$13,955
D4460NP-12M	four drawers	60"	31.5"	36"	20.2	12	.35	6.0	115	5-15P	495	110	\$18,745
4460NP-18M	two doors	60"	31.5"	36"	20.2	18	.35	6.0	115	5-15P	411	110	\$14,305
D4460NP-18M	four drawers	60"	31.5"	36"	20.2	18	.35	6.0	115	5-15P	495	110	\$19,665
4460NP-24M	two doors	60"	31.5"	36"	20.2	24	.35	6.0	115	5-15P	411	110	\$14,215
D4460NP-24M	four drawers	60"	31.5"	36"	20.2	24	.35	6.0	115	5-15P	495	110	\$19,415
ST4460NP-12M	two doors	60"	31.5"	36"	20.2	12	.35	6.0	115	5-15P	411	110	\$14,085
STD4460NP-12M	four drawers	60"	31.5"	36"	20.2	12	.35	6.0	115	5-15P	495	110	\$19,870
ST4460NP-18M	two doors	60"	31.5"	36"	20.2	18	.35	6.0	115	5-15P	411	110	\$14,430
STD4460NP-18M	four drawers	60"	31.5"	36"	20.2	18	.35	6.0	115	5-15P	495	110	\$20,225
64" MEGA TOP FRONT BREATHER													
4464NP-12M	two doors	64"	31.5"	36"	21.6	12	.35	6.0	115	5-15P	421	110	\$14,535
D4464NP-12M	four drawers	64"	31.5"	36"	21.6	12	.35	6.0	115	5-15P	522	110	\$20,340
4464NP-18M	two doors	64"	31.5"	36"	21.6	18	.35	6.0	115	5-15P	421	110	\$14,890
D4464NP-18M	four drawers	64"	31.5"	36"	21.6	18	.35	6.0	115	5-15P	522	110	\$20,700
4464NP-24M	two doors	64"	31.5"	36"	21.6	24	.35	6.0	115	5-15P	421	110	\$15,670
D4464NP-24M	four drawers	64"	31.5"	36"	21.6	24	.35	6.0	115	5-15P	522	110	\$20,425
ST4464NP-12M	two doors	64"	31.5"	36"	21.6	12	.35	6.0	115	5-15P	421	110	\$14,975
STD4464NP-12M	four drawers	64"	31.5"	36"	21.6	12	.35	6.0	115	5-15P	522	110	\$20,200
ST4464NP-18M	two doors	64"	31.5"	36"	21.6	18	.35	6.0	115	5-15P	421	110	\$15,340
STD4464NP-18M	four drawers	64"	31.5"	36"	21.6	18	.35	6.0	115	5-15P	522	110	\$20,550
72" MEGA TOP FRONT BREATHER													
4472NP-18M	three doors	72"	31.5"	36"	24.8	18	.35	6.0	115	5-15P	461	110	\$16,045
D4472NP-18M	six drawers	72"	31.5"	36"	24.8	18	.35	6.0	115	5-15P	545	110	\$23,040
4472NP-24M	three doors	72"	31.5"	36"	24.8	24	.35	6.0	115	5-15P	461	110	\$16,380
D4472NP-24M	six drawers	72"	31.5"	36"	24.8	24	.35	6.0	115	5-15P	545	110	\$23,380
4472NP-30M	three doors	72"	31.5"	36"	24.8	30	.35	6.0	115	5-15P	461	110	\$16,240
D4472NP-30M	six drawers	72"	31.5"	36"	24.8	30	.35	6.0	115	5-15P	545	110	\$23,040
ST4472NP-18M	three doors	72"	31.5"	36"	24.8	18	.35	6.0	115	5-15P	461	110	\$16,200
STD4472NP-18M	six drawers	72"	31.5"	36"	24.8	18	.35	6.0	115	5-15P	545	110	\$23,005
ST4472NP-24M	three doors	72"	31.5"	36"	24.8	24	.35	6.0	115	5-15P	461	110	\$16,525
STD4472NP-24M	six drawers	72"	31.5"	36"	24.8	24	.35	6.0	115	5-15P	545	110	\$23,335

4400NP Series accessories and modifications can be found on page 35.

Specifications and prices subject to change without notice.

4400RP - AIR OVER RAILS



4448RP

Product Information

- Patented low velocity air screen ensures product stays cold without drying it out
- All 4400 Series units are 100% front breathing, which allows the unit to be pushed against a wall or built into a cabinet or an existing line up
- Durable, rugged stainless steel sides, top and front
- Features Delfield's exclusive Delrite ABS interior (on sides). ABS is extremely durable - it won't dent, chip or corrode and is backed by a limited lifetime warranty
- Rail accommodates 1/3 size or fractional pans with adapter bars
- Standard with 1/3 6" deep plastic pans in the rail
- Dual level pan brackets allow the pans to be lowered an additional inch in the unit without tools to provide additional pan temperature holding performance
- Standard with 17" wide, dishwasher safe polyethylene cutting board mounted on heavy-duty cutting board brackets
- Environmentally friendly R290 refrigerant
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Integral s/s full length door/drawer handle
- Standard on 5" casters for easy cleaning and installation
- 10' cord and plug supplied
- One epoxy coated wire shelf standard, installed per door section
- Electronic temperature control with adaptive defrost
- Three year parts and labor warranty and an additional 4 year compressor parts warranty.

Specifications and Prices

MODEL NUMBER	DESCRIPTION	OVERALL			VOLUME	1/3 PAN	H.P.	AMPS	VOLTS	NEMA PLUG	SHIP WEIGHT	LIST PRICE
		L	D	H	ft ³	CAPACITY						
4448RP	TWO SECTION WITH DOORS	48" (122cm)	31.5" (80cm)	42" (107cm)	17.96	6	0.3	4	115/60/1	5-15P	316	\$14,860
4472RP	TWO SECTION WITH DOORS	72" (183cm)	31.5" (80cm)	42" (107cm)	27.8	9	0.35	6.9	115/60/1	5-15P	461	\$19,720
4496RP	THREE SECTION WITH DOORS	96" (244cm)	31.5" (80cm)	42" (107cm)	37.65	12	0.35	5.1	115/60/1	5-15P	TBD	\$25,185
D4448RP	TWO SECTION WITH DRAWERS	48" (122cm)	31.5" (80cm)	42" (107cm)	17.96	6	0.3	4	115/60/1	5-15P	316	\$19,995
D4472RP	TWO SECTION WITH DRAWERS	72" (183cm)	31.5" (80cm)	42" (107cm)	27.8	9	0.35	6.9	115/60/1	5-15P	461	\$25,085
D4496RP	THREE SECTION WITH DRAWERS	96" (244cm)	31.5" (80cm)	42" (107cm)	37.65	12	0.35	5.1	115/60/1	5-15P	TBD	\$30,535

4400RP Series accessories and modifications can be found on page 36.

Specifications and prices subject to change without notice.

18600PTBMP - STANDARD PIZZA AND PREP STATIONS

18600PTLP - LIQUITEC® COOLED PREP TABLES

18600PDLP - DUAL RAIL PREP TABLES

CTP-NBP - COUNTERTOP PREP RAILS

Product Information

PTBMP, PDLP & PTLP SERIES ONLY

- Top and sides are constructed of stainless steel
- Back of unit is galvanized
- Pans and adapter bars by others
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam throughout unit
- Stainless steel removable hinged covers
- Unit on/off switch is located behind the louver
- Front louvered panel has 1.50" hole for rail on/off switch access
- Electronic temperature controls
- Protective rubber bumpers are affixed to the back of the unit
- 8' long electrical cord

PTBMP SERIES ONLY

- Mechanically cooled
- Pans are recessed 2"
- NSF7 certified
- Die-stamped openings to accommodate 12" x 20" hotel pans or fractional pans
- Environmentally friendly R-290 refrigerant (PTBM)
- Three year parts and labor warranty and an additional 4 year compressor parts warranty.

4400RP SERIES ONLY

- Patented air screen
- 100% Front breathing
- Pans are recessed
- Standard Polyethylene cutting board
- Environmentally friendly R290 refrigerant
- Three year parts and labor warranty and an additional 4 year compressor parts warranty.

CTP-NBP SERIES ONLY

- R290 refrigerant is used
- 18-gauge exterior
- Mechanically cooled
- Pans are recessed 3"
- NSF7 certified
- One year parts and labor standard warranty. Additional warranties available

PDLPV ONLY:

- 4.12" casters
- 34" standard work height
- Stainless steel finished ends
- LiquiTec® cooled flush mount rail with NSF7 certified performance
- Pans are flush mounted
- 17" wide polyethylene cutting board
- Five year compressor warranty
- Environmentally friendly R290 refrigerant
- Three year parts and labor warranty and an additional 2 year compressor parts warranty.



18660PTBMP



CTP8146NBP



18672PDLPV

Specifications and Prices

MODEL NUMBER	1/6 PAN CAP.	L	OVERALL D	H	STOR CU. FT.	# OF DOORS	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
--------------	--------------	---	-----------	---	--------------	------------	------	-----	-------	-----------	-------------	---------------	------------

MECHANICALLY COOLED REFRIGERATED PIZZA & SANDWICH TABLES

Self-Contained

18648PTBMP	12	48"	31.5"	42"	8.39	1	0.25	4.7	115	5-15P	520	110	\$17,965
18660PTBMP	14	60"	31.5"	42"	14.37	2	0.25	4.7	115	5-15P	580	110	\$19,015
18672PTBMP	18	72"	31.5"	42"	16.77	2	(2) 0.20	6.5	115	5-20P	635	110	\$20,555
18691PTBMP	22	91"	31.5"	42"	22.82	3	(2) 0.20	6.5	115	5-20P	770	110	\$24,725
18699PTBMP	24	99"	31.5"	42"	25.87	3	(2) 0.20	6.5	115	5-20P	805	110	\$25,650
186114PTBMP	28	114"	31.5"	42"	30.9	3	(2) 0.20	6.5	115	5-20P	927	110	\$30,925

MODEL NUMBER	L	OVERALL D	H	1/6 PAN CAPACITY	STOR CU. FT.	# OF DOORS	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
--------------	---	-----------	---	------------------	--------------	------------	------	-----	-------	-----------	-------------	---------------	------------

LIQUITEC COOLED PREP TABLES

Self-Contained

18648PTLP	48"	31.5"	42"	12	9.36	1	1/3	4.7	115	5-15P	520	110	\$32,900
18672PTLP	72"	31.5"	42"	18	16.52	2	1/3, 1/5	8.6	115	5-20P	635	110	\$39,625
18699PTLP	99"	31.5"	42"	24	25.07	3	1/3, 1/5	8.6	115	5-20P	805	110	\$46,425

MODEL NUMBER	L	OVERALL D	H	1/6 PAN CAPACITY	H.P.	AMPS	NEMA PLUG	SHIP WEIGHT	LIST PRICE
--------------	---	-----------	---	------------------	------	------	-----------	-------------	------------

DUAL RAIL LIQUITEC PREP TABLES

18648PDLP	48" (122cm)	31.50" (80cm)	42" (107cm)	24	1/3, 1/5	10.1	5-20P	691	\$37,195
18672PDLP	72" (183cm)	31.50" (80cm)	42" (107cm)	36	1/3, 1/5	12.7	5-20P	875	\$42,050

MODEL NUMBER	L	OVERALL D	H	1/6 PAN CAPACITY	ADAPTER BARS	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
--------------	---	-----------	---	------------------	--------------	------	-----	-------	-----------	-------------	---------------	------------

COUNTERTOP REFRIGERATED PREP RAILS

Self-Contained

CTP 8146-NBP	46"	17.03"	12.55"	12	5	1/5	2.8	115	5-15P	121	110	\$10,300
CTP 8160-NBP	60"	17.03"	12.55"	18	7	1/5	2.8	115	5-15P	158	110	\$10,970

18600PTBMP, 18600PTLP, 18600PDLP AND CTP/NBP Series accessories and modifications can be found on page 36.

Specifications and prices subject to change without notice.

F18 - HIGH PERFORMANCE PREP TABLE WITH NATURAL CONVECTION



F18MC32-FSP
*shown with optional
cutting board and
adapter bars



F18MC27-BSNP
*shown with optional
adapter bars

Product Information

High Performance Prep Table with LiquiTec®

- LiquiTec® cold pans with eutectic fluid technology and mechanically cooled cold pans
- Heavy-duty casters
- Electronic temperature control with base temp display
- Custom covers
- Insulated heat shield
- Holds 6" deep pans
- Covers:
BLSNP & SCSP - slide back
All Others - insulated heat shield

High Performance Prep Table with LiquiTec® with Natural Convection

- LiquiTec® cold pans with eutectic fluid technology
- Natural convection air to ensure proper cooling temperatures in the harshest kitchen environments
- Heavy-duty casters
- Electronic temperature control with base temp display
- Custom covers
- Insulated heat shield
- Holds 6" deep pans
- Covers:
BLSNP - slide back
BSNP & FSNP - insulated heat shield

Specifications

Call for Price

MODEL NUMBER	PAN CAP. (1/6)	VOLUME	SHELF AREA	# OF SHELVES	BTU LOAD @ 86F BASE/RAIL	BTU SYS. CAP @ 86F BASE/RAIL	H.P.	V/HZ/PH	AMPS	NEMA PLUG
HIGH PERFORMANCE REFRIGERATOR										
F18MC27-BSP	12	6.3	4.36	2	244/540	1494/1329	0.25	115/60/1	4.7	5-15P
F18SC27-DCP	6	6.3	4.36	2	244/270	1494/834	0.25	115/60/1	4.7	5-15P
F18MC32-BLSP	2 (1/2 SIZE)	7.7	5.32	2	263/360	1494/1025	0.25	115/60/1	4.7	5-15P
F18MC32-BSMP	12	7.7	5.32	2	263/304	1494/1019	0.25	115/60/1	4.7	5-15P
F18MC32-FSP	16	7.7	5.32	2	263/720	1494/1483	0.25	115/60/1	4.7	5-15P
F18RC32-FSP	8	7.7	5.32	2	263/360	1494/1025	0.25	115/60/1	4.7	5-15P
F18SC32-FSP	8	7.7	5.32	2	263/360	1494/1025	0.25	115/60/1	4.7	5-15P
F18MC33-SCSP	4	7.7	5.32	2	263/180	1494/607	0.25	115/60/1	4.7	5-15P
HIGH PERFORMANCE W/ NATURAL CONVECTION										
F18MC27-BSNP	12	6.3	4.36	2	244/540	1494/1483	0.25	115/60/1	4.7	5-15P
F18MC33-BLSNP	2 (1/2 SIZE)	7.7	5.32	2	263/360	1494/1025	0.25	115/60/1	4.7	5-15P
F18MC33-FSNP	16	7.7	5.32	2	263/720	1494/1483	0.25	115/60/1	4.7	5-15P

Specifications and prices subject to change without notice.

PREP TABLE ACCESSORIES/OPTIONS


Accessory	Description	List Price
44LIDHF	Hinged flat lid 27" (salad)	N/C
	Hinged flat lid 32" (salad)	N/C
	Hinged flat lid 48" (salad)	N/C
	Hinged flat lid 60" (salad)	N/C
	Hinged flat lid 64" (salad)	N/C
	Hinged flat lid 72" (salad)	N/C
4427LIDHS	Hinged flat slide back lid 27" (mega)	\$285
4432LIDHS	Hinged flat slide back lid 32" (mega)	\$285
4448LIDHS	Hinged flat slide back lid 48" (mega)	\$360
4460LIDHS	Hinged flat slide back lid 60" (mega)	\$410
4464LIDHS	Hinged flat slide back lid 64" (mega)	\$435
4472LIDHS	Hinged flat slide back lid 72" (mega)	\$585
44LIDFLOS	Flat lift off lid 27" (salad)	N/C
	Flat lift off lid 32" (salad)	N/C
	Flat lift off lid 48" (salad)	N/C
	Flat lift off lid 60" (salad)	N/C
	Flat lift off lid 64" (salad)	N/C
	Flat lift off lid 72" (salad)	N/C
44LIDFLOM	Flat lift off lid 27" (mega)	N/C
	Flat lift off lid 32" (mega)	N/C
	Flat lift off lid 48" (mega)	N/C
	Flat lift off lid 60" (mega)	N/C
	Flat lift off lid 64" (mega)	N/C
	Flat lift off lid 72" (mega)	N/C
4427LIDFLOIS	Flat lift off insulated lid 27" (salad)	\$165
4432LIDFLOIS	Flat lift off insulated lid 32" (salad)	\$225
4448LIDFLOIS	Flat lift off insulated lid 48" (salad)	\$410
4460LIDFLOIS	Flat lift off insulated lid 60" (salad)	\$490
4464LIDFLOIS	Flat lift off insulated lid 64" (salad)	\$510
4472LIDFLOIS	Flat lift off insulated lid 72" (salad)	\$695
4427LIDFLOIM	Flat lift off insulated lid 27" (mega)	\$165
4432LIDFLOIM	Flat lift off insulated lid 32" (mega)	\$225
4448LIDFLOIM	Flat lift off insulated lid 48" (mega)	\$410
4460LIDFLOIM	Flat lift off insulated lid 60" (mega)	\$490
4464LIDFLOIM	Flat lift off insulated lid 64" (mega)	\$510
4472LIDFLOIM	Flat lift off insulated lid 72" (mega)	\$695
44CLEARLID	Clear plexi lid (per opening)	\$1,230
44DRAWER	24" drawers in place of a door	\$3,275
	30" drawers in place of a door	\$3,275
	32" drawers in place of a door	\$3,275
44PANLOC	Optional pan location/pan openings	\$955
44LOCK	24" door lock (all or nothing)	\$460 per section
	27" door lock (all or nothing)	\$460 per section
	30" door lock (all or nothing)	\$460 per section
	32" door lock (all or nothing)	\$460 per section
	24" drawer lock (all or nothing)	\$460 per section
	27" drawer lock (all or nothing)	\$460 per section
	30" drawer lock (all or nothing)	\$460 per section
	32" drawer lock (all or nothing)	\$460 per section
AS000-AXD-003F	4" load height casters for 27" and 32"	\$0
AS000-AXD-003G	4" load height casters for 48" thru 72"	\$0
AS000-B4V-003C	SS back panel - 24ga 430 rolled finish - 27"	\$980
AS000-B4V-003D	SS back panel - 24ga 430 rolled finish - 32"	\$1,075
AS000-B4V-003E	SS back panel - 24ga 430 rolled finish - 48"	\$1,425
AS000-B4V-003J	SS back panel - 24ga 430 rolled finish - 60"	\$1,800
AS000-B4V-003S	SS back panel - 24ga 430 rolled finish - 64"	\$1,895
AS000-B4V-004B	SS back panel - 24ga 430 rolled finish - 72"	\$2,080

44THERM	Exterior thermometer (dial in door on 27")	\$870
	Exterior thermometer (digital on others)	\$870
4427COMPM	Composite cutting board (mega) - 27"	\$350
4432COMPM	Composite cutting board (mega) - 32"	\$465
4448COMPM	Composite cutting board (mega) - 48"	\$650
4460COMPM	Composite cutting board (mega) - 60"	\$770
4464COMPM	Composite cutting board (mega) - 64"	\$835
4472COMPM	Composite cutting board (mega) - 72"	\$930
4427COMPS	Composite cutting board (salad) - 27"	\$350
4448COMPS	Composite cutting board (salad) - 48"	\$650
4460COMPS	Composite cutting board (salad) - 60"	\$770
4464COMPS	Composite cutting board (salad) - 64"	\$835
4472COMPS	Composite cutting board (salad) - 72"	\$930
AS3978274	Extra shelf per section (27")	\$190
AS3978276	Extra shelf per section (32" and 64")	\$190
AS3978273	Extra shelf per section (48" and 72")	\$190
AS3978275	Extra shelf per section (60")	\$190
4427TRAY	Tray slides - fold down Shelley design (27")	\$1,975
4432TRAY	Tray slides - fold down Shelley design (32")	\$2,095
4448TRAY	Tray slides - fold down Shelley design (48")	\$2,925
4460TRAY	Tray slides - fold down Shelley design (60")	\$3,055
4464TRAY	Tray slides - fold down Shelley design (64")	\$4,140
4472TRAY	Tray slides - fold down Shelley design (72")	\$4,405
AS000-D48-0038	Condenser filter	\$95
AS000-D10-0032	Foot pedal - left	\$140
AS000-D10-0033	Foot pedal - right	\$140
44LIGHT	LED interior light on 27 and 32 (current design with LED bulb)	\$1,300
	LED interior light on 48 thru 72 (current design with LED bulb)	\$1,300

Overshelves

AS000-AQS-0030	OVERSHELF, SINGLE TIER, 27LX16WX20H	\$720
AS000-AQS-0031	OVERSHELF, SINGLE TIER, 32LX16WX20H	\$785
AS000-AQS-0032	OVERSHELF, SINGLE TIER, 48LX16WX20H	\$1,180
AS000-AQS-0033	OVERSHELF, SINGLE TIER, 60LX16WX20H	\$1,345
AS000-AQS-0034	OVERSHELF, SINGLE TIER, 64LX16WX20H	\$1,495
AS000-AQS-0035	OVERSHELF, SINGLE TIER, 72LX16WX20H	\$1,655
AS000DAQS-0036	OVERSHELF, DOUBLE TIER, 27LX16WX20H-14H	\$1,450
AS000DAQS-0037	OVERSHELF, DOUBLE TIER, 32LX16WX20H-14H	\$1,575
AS000DAQS-0038	OVERSHELF, DOUBLE TIER, 48LX16WX20H-14H	\$2,285
AS000DAQS-0039	OVERSHELF, DOUBLE TIER, 60LX16WX20H-14H	\$3,050
AS000DAQS-003A	OVERSHELF, DOUBLE TIER, 64LX16WX20H-14H	\$3,195
AS000DAQS-003B	OVERSHELF, DOUBLE TIER, 72LX16WX20H-14H	\$3,320
AS000-AQS-003J	OVERSHELF, SINGLE TIER, 27LX16WX17H	\$695
AS000-AQS-0042	OVERSHELF, SINGLE TIER, 27LX18WX15H	\$770
AS000-AQS-003K	OVERSHELF, SINGLE TIER, 32LX16WX17H	\$1,115
AS000-AQS-003L	OVERSHELF, SINGLE TIER, 48LX16WX17H	\$1,275
AS000-AQS-003M	OVERSHELF, SINGLE TIER, 60LX16WX17H	\$1,395
AS000-AQS-003N	OVERSHELF, SINGLE TIER, 64LX16WX17H	\$1,625
AS000-AQS-003P	OVERSHELF, SINGLE TIER, 72LX16WX17H	\$2,095
AS000DAQS-003Q	OVERSHELF, DOUBLE TIER, 27LX16WX17H-10H	\$1,395
AS000DAQS-003R	OVERSHELF, DOUBLE TIER, 32LX16WX17H-10H	\$1,510
AS000DAQS-003S	OVERSHELF, DOUBLE TIER, 48LX16WX17H-10H	\$2,210
AS000DAQS-003T	OVERSHELF, DOUBLE TIER, 60LX16WX17H-10H	\$3,020
AS000DAQS-003U	OVERSHELF, DOUBLE TIER, 64LX16WX17H-10H	\$3,125
AS000DAQS-003V	OVERSHELF, DOUBLE TIER, 72LX16WX17H-10H	\$3,255
AS000-AQS-003W	OVERSHELF, SINGLE TIER, 27LX16WX10H	\$695
AS000-AQS-003X	OVERSHELF, SINGLE TIER, 32LX16WX10H	\$720
AS000-AQS-003Y	OVERSHELF, SINGLE TIER, 48LX16WX10H	\$1,115
AS000-AQS-003Z	OVERSHELF, SINGLE TIER, 60LX16WX10H	\$1,275
AS000-AQS-0040	OVERSHELF, SINGLE TIER, 64LX16WX10H	\$1,395
AS000-AQS-0041	OVERSHELF, SINGLE TIER, 72LX16WX10H	\$1,625

Drawer configurations for 4400NP series only.

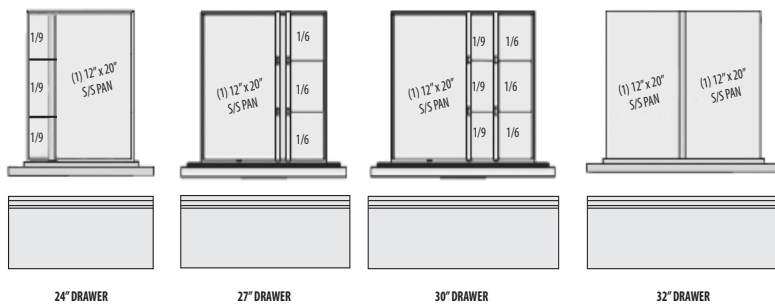


Specifications and prices subject to change without notice.

PREP TABLE ACCESSORIES

PTBMP AND PTLP MODELS

Stainless steel back (per linear inch)-----	\$35
ECPB48 Partial stainless steel back for 18648PTBMP (Rail only) -----	\$370
ECPB60 Partial stainless steel back for 18660PTBMP (Rail only) -----	\$380
ECPB72 Partial stainless steel back for 18672PTBMP (Rail only) -----	\$400
ECPB91 Partial stainless steel back for 18691PTBMP (Rail only) -----	\$455
ECPB99 Partial stainless steel back for 18699PTBMP (Rail only) -----	\$455
ECPB114 Partial stainless steel back for 186114PTBMP (Rail only)-----	\$495
Laminate facing for units; per linear inch -----	\$25
(Laminate facing for rear of units requires stainless steel back)	
Cheese grates with removable catch pans (per linear foot)-----	\$970
Door/Drawer locks -----	\$700/section
Composite cutting board (20" wide x 1/2" thick) -----	
48" -----	\$1,565
60" -----	\$1,895
72" -----	\$2,225
91" -----	\$2,690
99" -----	\$3,070
114" -----	\$3,485
Polyethylene cutting board (20" wide x 1/2" thick) Standard on PTLP &	
48" -----	\$810
60" -----	\$955
72" -----	\$1,100
91" -----	\$1,375
99" -----	\$1,450
114" -----	\$1,685
18" wide single tier overshelf -----	
48" -----	\$1,510
60" -----	\$1,860
72" -----	\$2,185
91" -----	\$2,800
99" -----	\$3,000
114" -----	\$3,450
Drawers 19", 2 high, hold one 12" x 20" x 6" deep pan -----	\$4,135
per drawer (pans supplied by others) -----	
Drawers 19", 3 high, hold one 12" x 20" x 4" deep pan -----	\$5,300
per drawer (pans supplied by others) -----	
Drawers 27", 2 high, hold two 12" x 20" x 6" deep pans -----	\$4,355
per drawer (pans supplied by others) -----	
Drawers 27", 3 high, hold two 12" x 20" x 4" deep pans -----	\$5,535
per drawer (pans supplied by others) -----	
Drawers 32", 2 high, hold two 12" x 20" x 6" deep pans -----	\$4,355
per drawer (pans supplied by others) -----	
Drawers 32", 3 high, hold two 12" x 20" x 4" deep pans -----	\$5,545
per drawer (pans supplied by others) -----	
TR9B tray rack - 24" size door or larger only -----	
(Base support style for 18" x 26" trays; 2" centers;) (3977985) -----	\$695
412 Move mechanical housing to the left -----	\$565

Drawer configurations for PTBMP, PDLP and PTLP series.

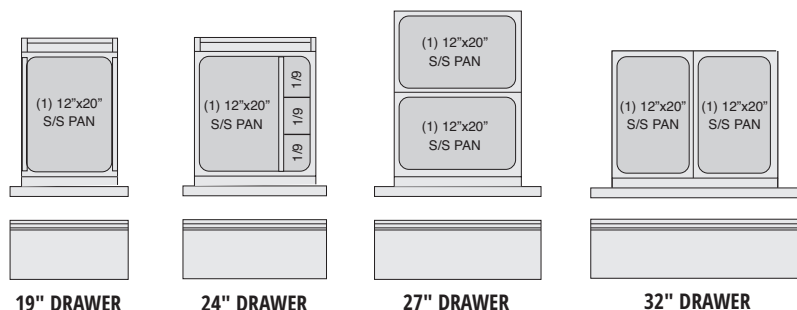

CTP-NBP MODELS

Laminate facing for CTP models -----	
Per linear inch -----	\$20

PDLP MODELS

Stainless steel back -----	
Per linear inch -----	\$35
Tray racks - TR-9B (3977985)-----	\$695/door
Composite cutting board in lieu of standard -----	
-48" -----	\$1,325
-72" -----	\$1,995
1027A - 6" (15cm) casters, set of 4, w/brake -----	\$1,155
1027B - 6" (15cm) legs, set of 4 -----	\$770
Cheese grates with removable catch pans-----	\$980/ft
(Note: cheese grate option is taller than the lower front rail. Removing the lower covers during operation or removing the grates may be necessary during operation)	
27" wide refrigerated drawers (2) high, -----	
holds 6" deep pans -----	\$5,085/section
Door/Drawer locks-----	\$700/lock
Additional Shelves -----	\$400/ea
Additional Shelves -----	\$365/ea

4400RP ACCESSORIES

44RPLIDFLO	Flat lift off lid	N/C
4448RPINSLO	Insulated flat lift off lid on 48"	\$1,785
4472RPINSLO	Insulated flat lift off lid on 72"	\$2,460
4496RPINSLO	Insulated flat lift off lid on 96"	\$3,350
4424RPDR	24" drawers in place of a door	\$3,275
4432RPDR	32" drawers in place of a door	\$3,275
4424RPLOCK	24" door lock (all or nothing) per section	\$460
4432RPLOCK	32" door lock (all or nothing) per section	\$460
4424RPLOCKD	24" drawer lock (all or nothing) per section	\$460
4432RPLOCKD	32" drawer lock (all or nothing) per section	\$460
AS000-AXD-003G	4" load height casters for 48" and 72" models	\$0
AS000-AXD-003J	4" load height casters for 96" models	\$0
AS000-B4V-0055	Stainless steel back 48"	\$1,425
AS000-B4V-0056	Stainless steel back 72"	\$2,070
AS000-B4V-0057	Stainless steel back 96"	\$2,400
44RPTHERM	exterior digital thermometer	\$870
4448RPCOMP	Composite cutting board - 48"	\$1,565
4472RPCOMP	Composite cutting board - 72"	\$2,225
4496RPCOMP	Composite cutting board - 96"	\$2,995
AS3978276	Extra shelf per section (32")	\$190
AS3978273	Extra shelf per section (48" and 72")	\$190
AS000-D48-0038	Condenser filter	\$95
COVPEDAL	Foot pedal	\$850
44RPLIGHT	LED interior light	\$1,300
AS000-AQS-0043	48" one tier overshelf	\$1,275
AS000-AQS-0044	72" one tier overshelf	\$2,095
AS000-AQS-0045	96" one tier overshelf	\$2,550
AS000-AQS-0046	48" two tier overshelf	\$2,210
AS000-AQS-0047	72" two tier overshelf	\$3,255
AS000-AQS-0048	96" two tier overshelf	\$4,025

Specifications and prices subject to change without notice.

F2600CP Series

Standard Low Profile Freezer Base
Equipment Stands

F2900CP Series

Low Profile Refrigerated Base
Equipment Stands



F2900CP SERIES - REFRIGERATOR BASE EQUIPMENT STANDS

F2600CP SERIES - FREEZER BASE EQUIPMENT STANDS

Product Information

- Top is 18-gauge stainless steel, with integral full perimeter marine edge
- Standard stainless steel ends
- High density polyurethane foam insulation throughout unit
- Refrigerated/freezer base fronts are made of .095" thick ABS plastic backed by rigid polyurethane water blown injection molded frames (NO WOOD)
- Exterior drawer fronts are stainless steel with an Delrite ABS plastic liner
- Snap-in dart style vinyl magnetic gasket
- Drawer handles are recessed black plastic held in with a positive lock system
- 14-gauge leg rails run the entire length of the unit
- Self-contained refrigerators come standard on 500 pound casters with optional 6.12" adjustable full stainless steel legs and bullet feet
- 8' cord and plug supplied
- Base interior cabinet is cooled with mullion style coated blower coil(s) mounted between each door/drawer section for even air and temperature control
- Blower coil enclose refrigeration lines, evaporator coil, expansion valve and fans
- Interior refrigerated base cabinet section to maintain 36° to 40° meeting NSF7 requirements
- Digital thermometer with electronic controls
- Electric condensate evaporators are standard
- Wall-mounted bracket to prevent tipping
- Full Extension Plus Drawer system is a complete drawer system. F2600CP model drawer systems hold 12" x 20" x 8" deep hotel pans (by others). F2900CP model drawer systems hold 12" x 20" x 4" deep hotel pans (by others). The drawer system is all stainless steel construction for maximum durability.
- F2600CP base cabinet will maintain 0° to -5° temperatures at 100° ambient room temperature meeting NSF7 requirements
- When ordering, specify make, model and depth of cooking equipment sitting on the equipment stand
- Height of surface for setting equipment is 25.50"
- Self-contained freezers are standard with a defrost timer
- Environmentally friendly R290 refrigerant
- Three year parts and labor warranty and an additional 4 year compressor parts warranty.
- Lifetime warranty on Delfield's full extension plus drawer system track.



F2980P
Shown with optional
casters



FULL EXTENSION
PLUS DRAWER
SYSTEM!

Specifications and Prices

MODEL NUMBER	OVERALL			# OF DRAWERS	PAN CAP.	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
	L	D	H									
LOW-PROFILE REFRIGERATED BASE EQUIPMENT STANDS												
Self-Contained NOTE: Remove the "C" on the model number when ordering with legs. (Example - F2952P).												
F2936CP	36.25	31"	24"	(2) 27"	4	0.17	2	115	5-15P	374	110	\$17,360
F2952CP	52.25	31"	24"	(2) 32"	4	0.20	2.9	115	5-15P	398	110	\$19,585
F2956CP	56.25	31"	24"	(2) 32"	4	0.20	2.9	115	5-15P	405	110	\$20,250
F2960CP	60.25	31"	24"	(2) 19" (2) 27"	6	0.20	2.9	115	5-15P	464	110	\$21,140
F2962CP	62.25	31"	24"	(2) 19" (2) 27"	6	0.20	2.9	115	5-15P	479	110	\$22,765
F2973CP	73.25	31"	24"	(2) 27" (2) 32"	8	0.25	4.8	115	5-15P	535	110	\$22,930
F2975CP	75.25	31"	24"	(2) 27" (2) 32"	8	0.25	4.8	115	5-15P	540	110	\$23,525
F2978CP	78.25	31"	24"	(4) 32"	8	0.25	4.8	115	5-15P	589	110	\$23,760
F2980CP	80.25	31"	24"	(4) 32"	8	0.25	4.8	115	5-15P	600	110	\$23,985
F2987CP	87.25	31"	24"	(4) 27" (2) 19"	10	0.25	4.8	115	5-15P	672	110	\$27,205
F2996CP	96.25	31"	24"	(6) 27"	12	0.25	4.8	115	5-15P	725	110	\$27,595
F2999CP	99.25	31"	24"	(6) 27"	12	0.25	4.8	115	5-15P	725	110	\$28,005
F29110CP	110.25	31"	24"	(6) 32"	12	0.35	6.3	115	5-15P	766	110	\$28,340
LOW-PROFILE FREEZER BASE EQUIPMENT STANDS												
Self-contained												
F2660CP	60.25"	31"	24"	(1) 32"	4	(2) .35	7.6	115	5-15P	418	110	\$24,285
F2694CP	94.25"	31"	24"	(2) 32"	8	(2) .35	7.6	115	5-15P	505	110	\$28,560

F26, 29 Series accessories and modifications can be found on page 39.

Specifications and prices subject to change without notice.

EQUIPMENT STAND ACCESSORIES

F2600CP & F2900CP SERIES

505H	Stainless steel back -----per linear inch	\$30
108	Drawer locks (factory installed only; each) -----	\$595
412	Mechanical housing left side-----	\$565
1027I	6" casters in lieu of 4" casters -----	\$455

Doors in lieu of drawers except 32"


104A	19" door, low profile -----	\$1,005
104C	27" door, low profile -----	\$1,065
906E	Plastic laminate end -----	\$990
505A	Plastic laminate back -----per linear inch	\$35
505F	Plastic laminate front -----per linear inch	\$20

Single 8" deep drawer in lieu of standard 2 high drawer set (F29 Series)

102E	19" single drawer, low profile-----	\$3,990
102G	27" single drawer, low profile-----	\$4,220
102H	32" single drawer, low profile-----	\$4,220

102N Modify 4" Lo-Pro Drawers to 6" deep----- \$350

Single 8" deep polycarbonate pans for 8" deep drawer available
(contact factory)

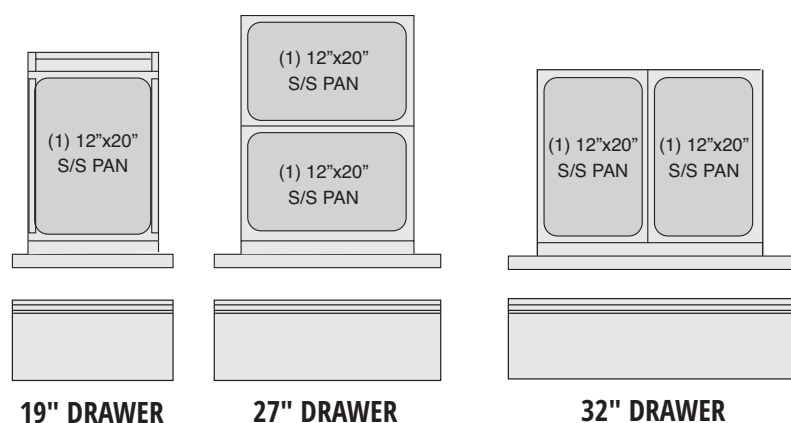Drawer configurations for F2600CP & F2900CP series.

Specifications and prices subject to change without notice.

EHEI Hot Food Tables

EHEI Hot Food Tables



Product Information

- Stainless steel top and sides
- Individual wells with infinite controls
- Wet and dry operation
- 8" polyethylene cutting board
- Drains, manifold and common gate valve
- Stainless steel plate shelf
- Fill faucet
- Stainless steel bottom shelf with 3" riser at rear
- Models on casters (C) standard with cord and plug
- One year parts and labor warranty



EHEI36C

Specifications and Prices

MODEL	L	D	H	# OF WELLS	VOLTS	AMPS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
EHEI36C	36"	31.5"	36"	2	120	20.0	5-30P	250	100	\$8,165
EHEI48C	48"	31.5"	36"	3	208/230	15.0/16.0	6-20P	280	100	\$10,130
EHEI60C	60"	31.5"	36"	4	208/230	20.0/22.0	6-30P	310	100	\$12,285
EHEI74C	74"	31.5"	36"	5	208/230	24.0/27.0	6-50P	350	100	\$14,455
EHEI36C-208	36"	31.5"	36"	2	208/230	20.0	5-30P	250	100	\$10,060

Accessories

ECSB36 - Chef side stainless steel back 36"..... \$665

ECSB48 - Chef side stainless steel back 48"..... \$845

ECSB60 - Chef side stainless steel back 60".....\$1,025

ECSB74 - Chef side stainless steel back 74".....\$1,230

Composite 8" deep cutting boards in lieu of standard polyethylene

36"..... \$565

48"..... \$665

60"..... \$920

74".....\$1,140

6" Stainless Steel Legs (Ship Loose Kit for field installation)..... \$255

EHEI-CORD

Cord and plug (units on legs only) Original order only; not field-installable....\$1,715

605C1- Single tier stainless steel overshelf 18" deep\$35/inch

605C2- Double tier stainless steel overshelf 18" deep.....\$80/inch

FlexiShield®


Foodshields


Shelleysteel®

Stainless Steel Mobile Serving Systems


Shelleyglas®

Fiberglass Mobile Serving Systems

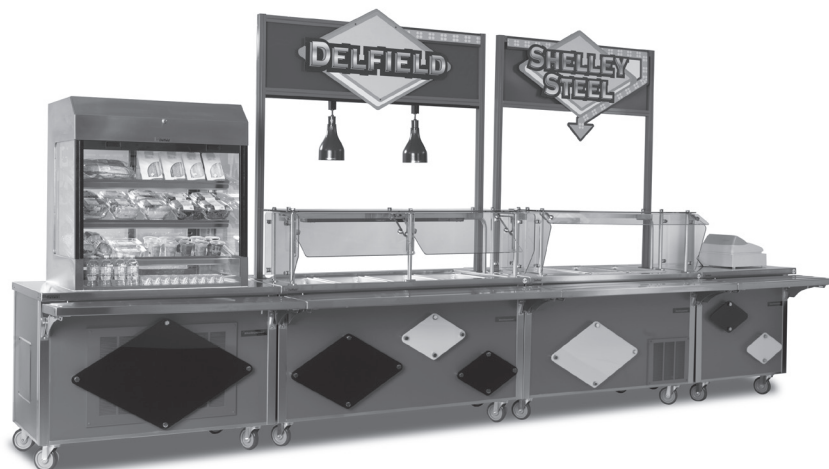


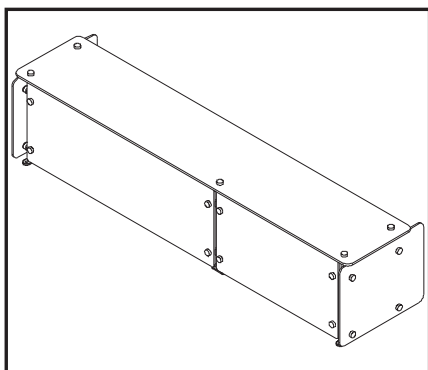


DCFSG Series
Single tier glass front protector

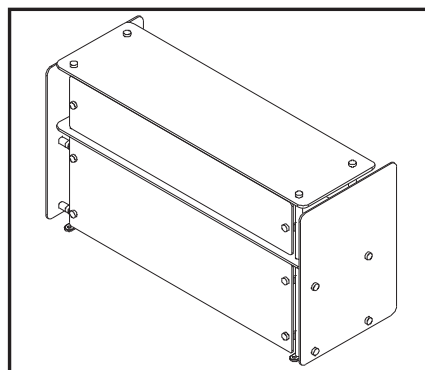


DCFSG2 Series
Double tier glass front protector

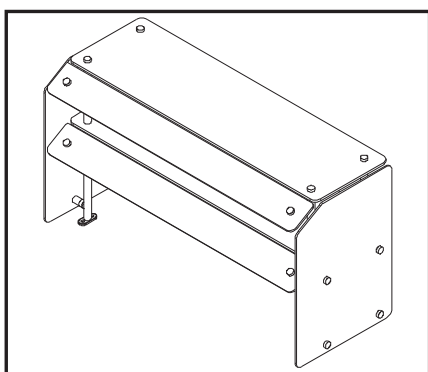


DCFSH Series
Double tier, with sneeze guard fronts

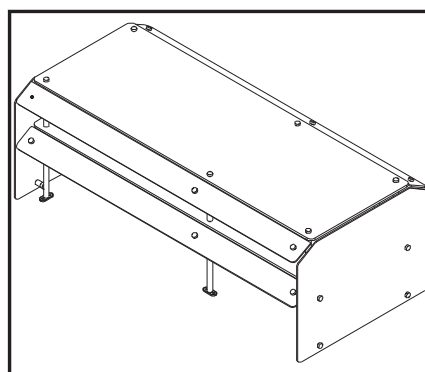


DCFSHD Series
Double service, double tier display with sneeze guard fronts

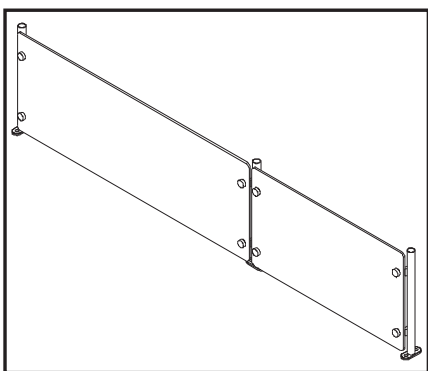

DCFSSS Series
Slicer Shield

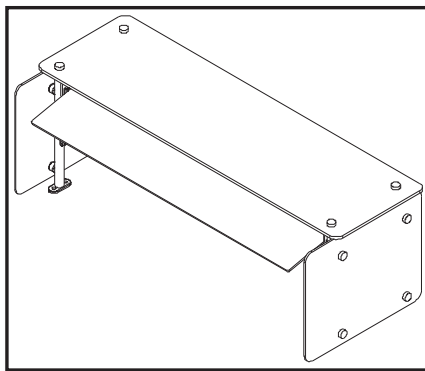


DCFSFS Series
Single tier, flexible food shield (pivots in three positions)

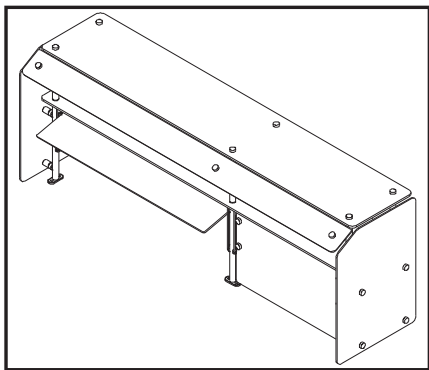


DCFSFS2 Series

Double tier flexible foodshield (pivots in three positions)

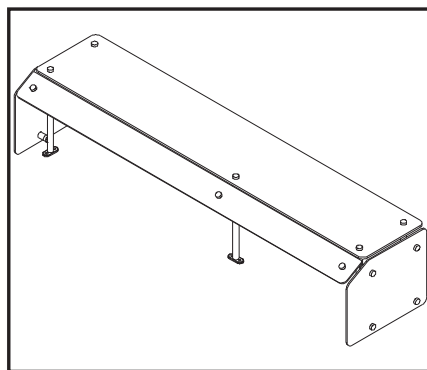


DCFSKS Series

Single tier, fixed food shield front, single service

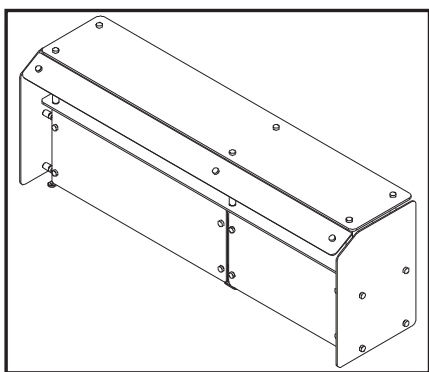


DCFSGH Series

Double tier display, bottom tier full glass front, second tier sneeze-guard style

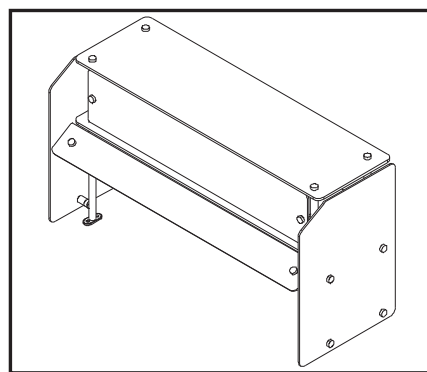

DCFSHG Series

Double tier display bottom tier sneezeguard style, second tier full glass front

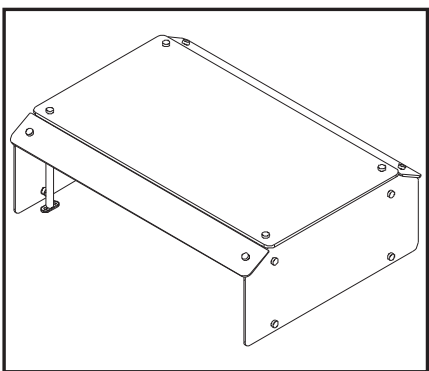


DCFSKD Series

Single tier, fixed food shield front, dual service

Specifications and prices subject to change without notice.

Product Information

- Mostly glass display allows you to see product from every angle
- Standard construction is 1" diameter stainless steel tubular legs. 1/4" tempered glass fronts and end glass. 3/8" tempered glass top shelf
- Comes fully assembled
- Standard bright chrome finish and black powdercoat
- End glass is standard on all food shields
- A complete line of accessories including stainless steel shelves, heat lamps and lighting
- All models meet NSF 2011 requirements.



DCFSG
Single tier glass
front protector

Specifications

Model Number	Description	Call for Price
DCFSG	Glass front food shield, single tier with glass shelf, single service	
DCFSG2	Glass front food shield, double tier with two glass shelves, single service	
DCFS5S	Glass front food shield, slicer shield style	
DCF5H	Two tier display, sneeze guard, single service	
DCF5HD	Two tier display with sneeze guard, dual service	
DCF5FS	Flexible shield, converts to three positions	
DCF5FS2	Flexible shield, converts to three positions, two tier	
DCF5KS	Single tier display, fixed sneeze guard front, single service	
DCF5KD	Single tier display, fixed sneeze guard front, dual service	
DCF5GH	Double tier display, bottom tier full glass front, second tier sneeze guard	
DCF5HG	Double tier display, bottom tier sneeze guard, second tier full glass front	

Model Number	Description	L	W	H	Call for Price
Flexishield Display					
DCFSCR	Corner Flexishield, 24" 90 degree with radius front edge, single tier	24"	24"	16"	
DCFSCR2	Corner Flexishield, 24" 90 degree with radius front edge, double tier	24"	24"	26"	
DCFSOS-XX	Overshelf with radial front edge, single tier	xx	18"	16"	
DCFSOS2-XX	Overshelf with radial front edge, double tier	xx	18"	26"	

Accessory Options

	Call for Price
DCFSFL	Fluorescent light with on/off switch
DCFHL	Radiant heat lamp with switch
DCFSSHELF	Stainless steel shelf
DCFSLED	LED light
DCF5HH	Narrow halogen heatlamp.....
DCF5HHL	Narrow halogen heatlamp with Xenon lights.....
DCFSL	Narrow Xenon Display lights

Black Powdercoating

DCFSBP-G	G Style food shield
DCFSBP-G2	G2 Style food shield
DCFSBP-SS	SS Style food shield.....
DCFSBP-H	H Style food shield
DCFSBP-HD	HD Style food shield.....
DCFSBP-FS	FS Style food shield.....
DCFSBP-FS2	FS2 Style food shield.....
DCFSBP-KD	KD Style food shield
DCFSBP-KS	KS Style food shield
DCFSBP-GH	GH Style food shield.....
DCFSBP-HG	HG Style food shield.....

Specifications and prices subject to change without notice.

SH SERIES - MOBILE HEATED SERVING COUNTERS

Product Information

- 14-gauge stainless steel top
- 18-gauge stainless steel exterior body
- 14-gauge galvanized bottom
- SH units have heated under storage compartment, provided with removable pan slides. SH-NU units have enclosed bases with no under storage
- A maximum 10' long cord and plug are supplied standard
- Electrical connections are 60 hertz, single phase. Three-phase design is available for an additional charge. Electrical accessories may change listed amperage and plug
- Top has two to six electrically heated, recessed die stamped stainless steel hot food warmers. Each warmer accommodates one 12" x 20" x 6" pan
- Hot well(s) with drain(s) manifolded standard to common gate valve
- All exterior panels reinforced with overlapping corners, welded in place
- Wet and dry operation
- All body cutouts reinforced with 14-gauge channel supports
- Choose from an almost unlimited selection of laminate colors and textures to add color to any room
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- Counter heights available from 28" to 36" in 2" increments
- Add eye catching decal packages or bright canopies to create a distinctive look!
- Features new easy access panel for quick replacement of heating element.
- One year parts and labor standard warranty. Additional warranties available



SH-3-NU

Shown with the following options:
G—glass front counter protector
A—12" stainless steel V fold-down tray slide



SH-4-NU

Shown with the following options:
KS—glass front counter protector
A—12" stainless steel V fold-down tray slide

Specifications

MODEL NUMBER	DESCRIPTION	OVERALL			AMP	VOLTS	WATTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
		L	D	H							
SHELLEYSTEEL HEATED SERVING COUNTERS											
With heated understorage											
SH-2	2 food wells	36"	30"	36"	15.0	120/208-230	2900/3300	14-20P	380	100	
SH-3	3 food wells	50"	30"	36"	20.0	120/208-230	3900/4500	14-30P	460	100	
SH-4	4 food wells	60"	30"	36"	26.0	120/208-230	4900/5700	14-50P	550	100	
SH-5	5 food wells	74"	30"	36"	31.0	120/208-230	5900/6900	14-50P	660	100	
SH-6	6 food wells	96"	30"	36"	37.0	120/208-230	6900/7900	14-50P	720	100	
Without understorage											
SH-2-NU	2 food wells	36"	30"	36"	11.0	120/208-230	2000/2400	14-20P	225	100	
SH-3-NU	3 food wells	50"	30"	36"	16.0	120/208-230	3000/3600	14-20P	275	100	
SH-4-NU	4 food wells	60"	30"	36"	22.0	120/208-230	4000/4800	14-30P	330	100	
SH-5-NU	5 food wells	74"	30"	36"	28.0	120/208-230	5000/6000	14-50P	420	100	
SH-6-NU	6 food wells	96"	30"	36"	33.0	120/208-230	6000/7000	14-50P	510	100	

Shelleyglas accessories and modifications can be found on pages 62-66.

Specifications and prices subject to change without notice.

SCSC-BP SERIES - MOBILE REFRIGERATED COLD PAN SERVING COUNTERS

SCSC-EFP SERIES - LIQUITEC REFRIGERATED COLD PAN



SCSC-74-BP
pans by others



SCSC-60-EFP
Shown with optional laminate, canopy, custom counter protector and extended base



Patented LiquiTec® Technology brings food and pans completely flush!

Product Information

- 14-gauge stainless steel top
- 18-gauge stainless steel exterior body
- 14-gauge galvanized bottom
- On/off switch mounted to exterior of unit
- A maximum 10' long cord and plug are supplied standard
- All exterior panels reinforced with overlapping corners, welded in place
- All body cutouts reinforced with 14-gauge channel supports
- Choose from an almost unlimited selection of laminate colors and textures to add color to any room
- Electrical connections are 60 hertz, single phase. Electrical accessories may change listed amperage and plug
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- Add eye catching decal packages or bright canopies to create a distinctive look!
- Counter heights available from 28" to 36" in 2" increments
- Environmentally friendly R290 refrigerant
- One year parts and labor standard warranty. Additional warranties available

SCSC-BP

- SCSC-B Series counters are standard with 7" deep refrigerated cold pan. Cold pans are fully

insulated with foamed in place polyurethane insulation

- Pans recessed 2" from top edge of counter
- SCSC-B models are standard with enclosed base
- Cold pans are standard with drain with valve
- Adapter bars will be furnished at no additional charge if requested on original order only. Pans are supplied by others
- Optional open shelf and dry door inserts can be added to all models and lengths. Refrigerated insert can be added to 60", 74", or 96" long units

SCSC-EFP

- The LiquiTec cold pan has two – six die stamped openings with depressed edges, each well, holding one 12" x 20" pan (pans supplied by others)
- Eutectic fluid completely surrounds each cold pan providing the maximum-- five sided cooling
- All SCSC-EF models meet NSF 7 with pans completely flush with counter
- Cold pan is fully insulated with foamed in place polyurethane insulation

Specifications

MODEL NUMBER	COLD PAN SIZE	DIMENSIONS			AMP	H.P.	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
		L	D	H							
SHELLEYSTEEL REFRIGERATED COLD PAN SERVING COUNTERS											
SCSC-36-BP	26" X 21.62"	36"	30"	36"	7.0	1/4	115	5-15P	350	100	
SCSC-50-BP	39" X 21.62"	50"	30"	36"	7.0	1/4	115	5-15P	425	100	
SCSC-60-BP	52" X 21.62"	60"	30"	36"	7.0	1/4	115	5-15P	500	100	
SCSC-74-BP	65" X 21.62"	74"	30"	36"	7.0	1/4	115	5-15P	575	110	
SCSC-96-BP	78" X 21.62"	96"	30"	36"	7.0	1/4	115	5-15P	650	110	

SHELLEYSTEEL LIQUITEC COLD PAN SERVING COUNTER WITH PATENTED LiquiTec® TECHNOLOGY

SCSC-36-EFP	2 pan cap	36"	30"	36"	7.0	1/4	115	5-15P	380	100	
SCSC-50-EFP	3 pan cap	50"	30"	36"	7.0	1/4	115	5-15P	455	100	
SCSC-60-EFP	4 pan cap	60"	30"	36"	7.0	1/4	115	5-15P	530	100	
SCSC-74-EFP	5 pan cap	74"	30"	36"	7.0	1/4	115	5-15P	615	100	
SCSC-96-EFP	6 pan cap	96"	30"	36"	7.0	1/4	115	5-15P	680	100	

Shelleyglas accessories and modifications can be found on pages 62-66.

Specifications and prices subject to change without notice.

SHCR-BP SERIES - HOT/COLD COMBINATION COUNTERS

SHC SERIES- ICE COOLED HOT/COLD COMBINATION COUNTERS

Product Information

- Save space by having both hot and cold in one convenient location
- 14-gauge stainless steel top
- 18-gauge stainless steel exterior body
- 14-gauge galvanized bottom
- All SHCR-B models are standard with enclosed bases
- Top has one to four electrically heated, recessed die-stamped stainless steel hot food warmers. Each warmer accommodates a 12" x 20" x 6" pan (pans supplied by others)
- A maximum 10' long cord and plug are supplied standard
- Electrical connections are 60 hertz, single phase. Three-phase design is available for an additional charge. Electrical accessories may change listed amperage and plug
- All exterior panels reinforced with overlapping corners, welded in place
- All body cutouts reinforced with 14-gauge channel supports
- Choose from an almost unlimited selection of laminate colors and textures to add color to any room
- Wet and dry operation
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- Counter heights available from 28" to 36" in 2" increments
- Add eye catching decal packages or bright canopies to create a distinctive look!
- One year parts and labor standard warranty. Additional warranties available

SHCR-BP ONLY

- The refrigerated cold pan is 7" deep constructed of stainless steel. Cold pan is equipped with a 1" drain with valve. Hot well(s) equipped with a drain with gate valve
- Meets NSF requirements with 3" recessed pans
- Environmentally friendly R290 refrigerant

SHC ONLY

- Insulated ice pan is 7" deep and constructed of 22-gauge stainless steel. Perforated false bottom, and drain with valve is standard. Hot well(s) with drain(s) manifolded standard to common gate valve



SH2CR-60-B

Shown with the following options:

- A. 12" stainless steel V fold down
- E. 10" wide stainless steel folddown work shelf
- KS. single service flip up sneeze guard
- U. End shelf

Specifications

MODEL NUMBER	HOT WELLS	COLD PAN SIZE	DIMENSIONS					VOLTS	WATTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
			L	D	H	AMP	H.P.						
SHELLEYSTEEL SELF-CONTAINED HOT AND COLD COMBINATION COUNTERS													
SHCR-50-BP	1	26" X 21.62"	50"	30"	36"	16.0	1/4	120	1000	5-20P	475	100	
SHCR-60-BP	1	39" X 21.62"	60"	30"	36"	16.0	1/4	120	1000	5-20P	575	100	
SH2CR-62-BP	2	26" X 21.62"	62"	30"	36"	18.0	1/4	120/208-230	2000/2400	14-30P	575	100	
SHCR-74-BP	1	52" X 21.62"	74"	30"	36"	16.0	1/4	120	1000	5-20P	688	100	
SH2CR-74-BP	2	26" X 21.62"	74"	30"	36"	18.0	1/4	120/208-230	2000/2400	14-30P	690	100	
SHCR-96-BP	1	65" X 21.62"	96"	30"	36"	16.0	1/4	120	1000	5-20P	730	100	
SH2CR-96-BP	2	52" X 21.62"	96"	30"	36"	18.0	1/4	120/208-230	2000/2400	14-30P	740	100	
SH3CR-96-BP	3	39" X 21.62"	96"	30"	36"	23.0	1/4	120/208-230	3000/3600	14-30P	750	100	
SH4CR-96-BP	4	26" X 21.62"	96"	30"	36"	29.0	1/4	120/208-230	4000/4800	14-50P	760	100	

Shelleyglas accessories and modifications can be found on pages 62-66.

For LiquiTec® option, see accessory pages.


Specifications

MODEL NUMBER	HOT WELLS	COLD PAN SIZE	OVERALL			AMP	H.P.	VOLTS	MAX WATTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
			L	D	H								
SHELLEYSTEEL ICE-COOLED HOT AND COLD COMBINATION COUNTERS													
SHC-50-NU	1	26" X 21.62"	50"	30"	36"	9.0	—	120	1000	5-15P	300	100	
SHC-60-NU	1	39" X 21.62"	60"	30"	36"	9.0	—	120	1000	5-15P	350	100	
SH2C-62-NU	2	26" X 21.62"	62"	30"	36"	11.0	—	120/208-230	2000/2400	14-20P	350	100	
SHC-74-NU	1	52" X 21.62"	74"	30"	36"	9.0	—	120	1000	5-15P	400	100	
SH2C-74-NU	2	26" X 21.62"	74"	30"	36"	11.0	—	120/208-230	2000/2400	14-20P	410	100	
SH3C-74-NU	3	26" X 21.62"	74"	30"	36"	16.0	—	120/208-230	3000/3600	14-20P	420	100	
SHC-96-NU	1	65" X 21.62"	96"	30"	36"	9.0	—	120	1000	5-15P	425	100	
SH2C-96-NU	2	52" X 21.62"	96"	30"	36"	11.0	—	120/208-230	2000/2400	14-20P	430	100	
SH3C-96-NU	3	39" X 21.62"	96"	30"	36"	16.0	—	120/208-230	3000/3600	14-20P	450	100	
SH4C-96-NU	4	26" X 21.62"	96"	30"	36"	22.0	—	120/208-230	4000/4800	14-30P	460	100	

Shelleyglas accessories and modifications can be found on pages 62-66.

Specifications and prices subject to change without notice.

SCFT-NUP SERIES - FROST TOP SERVING COUNTERS



SCFT-74-NUP



Add eye catching decal packages or bright canopies to create a distinctive look!

Product Information

- 14-gauge stainless steel top
- 18-gauge stainless steel exterior body
- 14-gauge galvanized bottom
- Frost top is 18-gauge stainless steel, one piece construction; perimeter drain with valve located at bottom of unit standard
- 18" x 26" sheet pan can rest on frost top
- On/off switch located on exterior of unit
- SCFT units are standard with enclosed base
- Meets NSF requirements
- Environmentally friendly R290 refrigerant
- A maximum 10' long cord and plug are supplied standard
- Electrical connections are 60 hertz, single phase. Electrical accessories may change listed amperage and plug
- All exterior panels reinforced with overlapping corners, welded in place
- All body cutouts reinforced with 14-gauge channel supports
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- Counter heights available from 28" to 36" in 2" increments
- Choose from an almost unlimited selection of laminate colors and textures to add color to any room
- Add eye catching decal packages or bright canopies to create a distinctive look!
- One year parts and labor standard warranty. Additional warranties available

Specifications

MODEL NUMBER	DESCRIPTION	OVERALL			AMP	H.P.	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
		L	D	H							
SHELLEYSTEEL FROST TOP SERVING COUNTERS											
Without understorage											
SCFT-36-NUP	frost top	36"	30"	36"	2.4	1/5	115	5-15P	380	100	
SCFT-50-NUP	frost top	50"	30"	36"	2.4	1/5	115	5-15P	455	100	
SCFT-60-NUP	frost top	60"	30"	36"	3.7	1/4	115	5-15P	540	100	
SCFT-74-NUP	frost top	74"	30"	36"	3.7	1/4	115	5-15P	610	110	
SCFT-96-NUP	frost top	96"	30"	36"	4.8	1/3	115	5-15P	680	110	

Shelleyglas accessories and modifications can be found on pages 62-66.

SCI SERIES - ICE PAN SERVING COUNTERS

Product Information

- 14-gauge stainless steel top
- 18-gauge stainless steel exterior body
- 14-gauge galvanized bottom
- Best for use where electricity is not available
- Insulated ice pan is 7" deep and is standard with the following: perforated false bottom, drain with valve
- SCI units are standard with dry hinged door storage compartment, while SCI-NU units have enclosed bases with no under storage
- Meets NSF requirements
- All exterior panels reinforced with overlapping corners, welded in place
- All body cutouts reinforced with 14-gauge channel supports
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- Choose from an almost unlimited selection of laminate colors and textures to add color to any room
- Add eye catching decal packages or bright canopies to create a distinctive look!
- One year parts and labor standard warranty. Additional warranties available



SCI-60-NU

Shown with the following options:

C. 10" wide three-bar fold down tray slide

H. Two tier display with glass shelves and sneeze guards

Specifications

MODEL NUMBER	ICE PAN SIZE	L	OVERALL D	H	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
SHELLEYSTEEL ICE PAN SERVING COUNTERS							
With dry understorage							
SCI-36	26" x 21.62"	36"	30"	36"	240	110	
SCI-50	39" x 21.62"	50"	30"	36"	285	110	
SCI-60	52" x 21.62"	60"	30"	36"	320	110	
SCI-74	65" x 21.62"	74"	30"	36"	360	110	
SCI-96	78" x 21.62"	96"	30"	36"	400	110	
Without understorage							
SCI-36-NU	26" x 21.62"	36"	30"	36"	200	110	
SCI-50-NU	39" x 21.62"	50"	30"	36"	245	110	
SCI-60-NU	52" x 21.62"	60"	30"	36"	280	110	
SCI-74-NU	65" x 21.62"	74"	30"	36"	330	110	
SCI-96-NU	78" x 21.62"	96"	30"	36"	380	110	

Shelleyglas accessories and modifications can be found on pages 62-66.

Specifications and prices subject to change without notice.



SCU-50-NU
Shown with optional legs

Product Information

- 14-gauge stainless steel top
- 18-gauge stainless steel exterior body
- 14-gauge galvanized bottom
- Reinforced top includes a stainless steel drain trough with removable stainless steel anti-splash drip gate. (Trough is standard on customer side, available on operator side if specified.)
- Drain trough has a 1" drain plumbed to a drain valve located at the bottom of the unit
- SCU models are standard with dry hinged door storage compartment
- Meets NSF requirements
- All exterior panels reinforced with overlapping corners, welded in place
- All body cutouts reinforced with 14-gauge channel supports
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- Choose from an almost unlimited selection of laminate colors and textures to add color to any room
- Add eye catching decal packages or bright canopies to create a distinctive look!
- One year parts and labor standard warranty. Additional warranties available

Specifications

MODEL NUMBER	DESCRIPTION	L	OVERALL D	H	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
SHELLEYSTEEL BEVERAGE COUNTERS							
With dry understorage							
SCU-36	24" urn trough	36"	30"	36"	200	125	
SCU-50	36" urn trough	50"	30"	36"	230	125	
SCU-60	48" urn trough	60"	30"	36"	270	125	
SCU-74	60" urn trough	74"	30"	36"	300	125	
SCU-96	82" urn trough	96"	30"	36"	340	125	
Without understorage							
SCU-36-NU	24" urn trough	36"	30"	36"	170	125	
SCU-50-NU	36" urn trough	50"	30"	36"	190	125	
SCU-60-NU	48" urn trough	60"	30"	36"	230	125	
SCU-74-NU	60" urn trough	74"	30"	36"	260	125	
SCU-96-NU	82" urn trough	96"	30"	36"	300	125	

Shelleyglas accessories and modifications can be found on pages 62-66.

SC SERIES - ALL PURPOSE COUNTERS

Product Information

- 14-gauge stainless steel top
- 18-gauge stainless steel exterior body
- 14-gauge galvanized bottom
- Flat 14-gauge stainless steel top
- SC models are standard with dry hinged door storage compartment
- Meets NSF requirements
- All exterior panels reinforced with overlapping corners, welded in place
- All body cutouts reinforced with 14-gauge channel supports
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- Choose from an almost unlimited selection of laminate colors and textures to add color to any room
- Add eye catching decal packages or bright canopies to create a distinctive look!
- One year parts and labor standard warranty. Additional warranties available



SC-50-NU

Shown with the following options:

- A. 12" stainless steel V fold down tray slide
- G. Glass front counter protector
- P. Open understorage with shelf

Specifications

MODEL NUMBER	DESCRIPTION	L	OVERALL D	H	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
SHELLEYSTEEL ALL PURPOSE COUNTERS							
With dry understorage							
SC-28	dry storage	28"	30"	36"	165	125	
SC-36	dry storage	36"	30"	36"	185	125	
SC-50	dry storage	50"	30"	36"	205	125	
SC-60	dry storage	60"	30"	36"	240	125	
SC-74	dry storage	74"	30"	36"	270	125	
SC-96	dry storage	96"	30"	36"	310	125	
Without understorage							
SC-28-NU	enclosed base	28"	30"	36"	120	125	
SC-36-NU	enclosed base	36"	30"	36"	160	125	
SC-50-NU	enclosed base	50"	30"	36"	180	125	
SC-60-NU	enclosed base	60"	30"	36"	210	125	
SC-74-NU	enclosed base	74"	30"	36"	240	125	
SC-96-NU	enclosed base	96"	30"	36"	280	125	

Shelleyglas accessories and modifications can be found on pages 62-66.



SC-60-NU



Specifications and prices subject to change without notice.

SCS SERIES - CASHIER'S COUNTER SCTRI SERIES - TRIANGLE CORNER COUNTER SCTS SERIES - TRAY STANDS



SCS-30

Shown with the following options:
A. 12" stainless steel V fold down tray slide
Q. outlet with breaker



SCTS-28

Shown with the following option:
SW. silverware cutouts with stainless steel silverware holder

Product Information

- 18-gauge stainless steel exterior body
- 14-gauge galvanized bottom
- 14-gauge stainless steel top
- Meets NSF requirements
- All exterior panels reinforced with overlapping corners, welded in place
- All body cutouts reinforced with 14-gauge channel supports
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- Choose from an almost unlimited selection of laminate colors and textures to add color to any room
- One year parts and labor standard warranty. Additional warranties available

SCS SERIES ONLY

- A 3" grommet hole is located at the rear of the top to allow cord access for cash registers
- Stainless steel locking cash drawer standard
- Stainless steel under shelf can serve as foot rest or storage

SCTS SERIES ONLY

- Silverware cutouts and cylinders are optional

Specifications

MODEL NUMBER	DESCRIPTION	L	D	H	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
SHELLEYSTEEL CASHIER'S COUNTERS										
SCS-30	cashier's counter	30"	30"	36"	N/A	N/A	N/A	180	100	
SCS-36	cashier's counter	30"	36"	36"	N/A	N/A	N/A	210	100	
SCS-50	cashier's counter	30"	50"	36"	N/A	N/A	N/A	270	100	
SHELLEYSTEEL TRIANGLE CORNER UNIT										
SC-TRI	corner unit, enclosed base	40"	30"	36"	N/A	N/A	N/A	160	100	
SC-TRIOS	corner unit, open shelf	40"	30"	36"	N/A	N/A	N/A	160	100	
SHELLEYSTEEL TRAY STANDS										
SCTS-28	tray stand	30"	28"	36"	N/A	N/A	N/A	150	125	
SCTS-36	tray stand	30"	36"	36"	N/A	N/A	N/A	192	125	

Shelleyglas accessories and modifications can be found on pages 62-66.

KH SERIES - MOBILE HEATED SERVING COUNTERS

Product Information

- One piece, molded fiberglass pylon (base), fully rounded corners, permanent color
- All corners and center sides reinforced with galvanized bracing, laminated into the fiberglass
- Full NSF and UL Certification
- Fire Code rating on fiberglass, laminate, canopy materials
- 14-gauge tops
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Wet and dry operation
- Caster mounting plates laminated into base
- Easy to use stainless steel interlock system is standard on base and tray slides
- Enclosed bases for vermin control
- A maximum 10' long cord and plug are supplied standard
- KH units have heated under storage compartment, provided with removable pan slides. KH-NU units have enclosed bases with no under storage
- Electrical connections are 60 hertz, single phase. Three-phase design is available for an additional charge. Electrical accessories may change listed amperage and plug
- Top has two to six electrically heated, recessed die stamped stainless steel hot food warmers.

Each warmer accommodates one 12" x 20" x 6" pan

- Hot well(s) with drain(s) manifolded standard to common gate valve
- All body cutouts reinforced with 14-gauge channel supports
- Easily modified with a complete array of standard accessories
- Counter heights available from 28" to 36" in 2" increments
- Choose from 25 standard fiberglass colors
- Add eye catching decal packages or bright canopies to create a distinctive look!
- Features new easy access panel for quick replacement of heating element.
- Contact Delfield for a Shelleyglas color chart or visit www.delfield.com
- One year parts and labor standard warranty. Additional warranties available



KH-4-NU

Shown with the following option:

- G. glass front counter protector
- P. open shelf understorage



KH-5-NU

Shown with the following options:

- KS. single service sneeze guard
- A. 12" stainless steel V fold-down tray slide
- V. 6" Adjustable bullet feet

Specifications

MODEL NUMBER	DESCRIPTION	OVERALL			AMP	VOLTS	MAX WATTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
		L	D	H							
SHELLEYGLAS HEATED SERVING COUNTERS											
With heated understorage											
KH-2	2 food wells	36"	30"	36"	15.0	120/208-230	2900/3300	14-20P	380	100	
KH-3	3 food wells	50"	30"	36"	20.0	120/208-230	3900/4500	14-30P	460	100	
KH-4	4 food wells	60"	30"	36"	26.0	120/208-230	4900/5700	14-50P	550	100	
KH-5	5 food wells	74"	30"	36"	31.0	120/208-230	5900/6900	14-50P	660	100	
KH-6	6 food wells	96"	30"	36"	37.0	120/208-230	6900/7900	14-50P	720	100	
Without understorage											
KH-2-NU	2 food wells	36"	30"	36"	11.0	120/208-230	2000/2400	14-20P	225	100	
KH-3-NU	3 food wells	50"	30"	36"	16.0	120/208-230	3000/3600	14-20P	275	100	
KH-4-NU	4 food wells	60"	30"	36"	22.0	120/208-230	4000/4800	14-30P	330	100	
KH-5-NU	5 food wells	74"	30"	36"	28.0	120/208-230	5000/6000	14-50P	420	100	
KH-6-NU	6 food wells	96"	30"	36"	33.0	120/208-230	6000/7000	14-50P	510	100	

Shelleyglas accessories and modifications can be found on pages 62-66.



Add eye catching decal packages or bright canopies to create a distinctive look!

Specifications and prices subject to change without notice.


KCSC-BP SERIES - MOBILE REFRIGERATED COLD PAN SERVING COUNTERS

KCSC-EFP SERIES - LIQUITEC REFRIGERATED COLD PAN



KCSC-50-B

Shown with the following options:
 HD. double-service two-tier display
 A. 12" stainless steel V fold down tray slide
 V. 6" adjustable bullet feet



Add eye catching decal packages or bright canopies to create a distinctive look!



Patented LiquiTec® Technology brings food and pans completely flush!



Product Information

- One piece, molded fiberglass pylon (base), fully rounded corners, permanent color
- All corners and center sides reinforced with galvanized bracing, laminated into the fiberglass
- Full NSF and UL Certification
- Fire Code rating on fiberglass, laminate, canopy materials
- 14-gauge tops
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Caster mounting plates laminated into base
- Easy to use stainless steel interlock system is standard on base and tray slides
- Enclosed bases for vermin control
- A maximum 10' long cord and plug are supplied standard
- Uses environmentally friendly R290 refrigerant
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- Electrical connections are 60 hertz, single phase. Electrical accessories may change listed amperage and plug
- Counter heights available from 28" to 36" in 2" increments
- Unit has on/off switch mounted on the exterior
- Add eye catching decal packages or bright canopies to create a distinctive look!
- Contact Delfield for a Shelleyglas color chart or visit www.delfield.com

- One year parts and labor standard warranty. Additional warranties available
- All body cutouts reinforced with 14-gauge channel supports

KCSC-BP SERIES ONLY

- KCSC-B Series counters are standard with 7" deep refrigerated cold pan. Cold pans are fully insulated with foamed in place polyurethane insulation
- Pans recessed 2" from top edge of counter
- Cold pans are standard with drain with valve
- Adapter bars will be furnished at no additional charge if requested on original order only. Pans are supplied by others
- Optional open shelf and dry door inserts can be added to all models and lengths. Refrigerated insert can be added to 60", 74", or 96" long units

KCSC-EFP SERIES ONLY

- The LiquiTec cold pan has two – six die stamped openings with depressed edges in each well, holding one 12" x 20" pan (pans supplied by others)
- Eutectic fluid completely surrounds each cold pan providing the maximum-- five sided cooling
- All KCSC-EF models meet NSF 7 with pans completely flush with counter
- Cold pan is fully insulated with foamed in place polyurethane insulation

Specifications

MODEL NUMBER	COLD PAN SIZE	DIMENSIONS			AMP	H.P.	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
		L	D	H							
SHELLEYGLAS REFRIGERATED COLD PAN SERVING COUNTERS											
KCSC-36-BP	26" x 21.62"	36"	30"	36"	2.4	1/5	115	5-15P	350	100	
KCSC-50-BP	39" x 21.62"	50"	30"	36"	2.4	1/5	115	5-15P	425	100	
KCSC-60-BP	52" x 21.62"	60"	30"	36"	3.7	1/4	115	5-15P	500	100	
KCSC-74-BP	65" x 21.62"	74"	30"	36"	3.7	1/4	115	5-15P	575	110	
KCSC-96-BP	78" x 21.62"	96"	30"	36"	4.8	1/3	115	5-15P	650	110	

SHELLEYGLAS WITH PATENTED LiquiTec® TECHNOLOGY

KCSC-36-EFP	2 pan cap	36"	30"	36"	2.4	1/5	115	5-15P	380	100	
KCSC-50-EFP	3 pan cap	50"	30"	36"	2.4	1/5	115	5-15P	455	100	
KCSC-60-EFP	4 pan cap	60"	30"	36"	3.7	1/4	115	5-15P	530	100	
KCSC-74-EFP	5 pan cap	74"	30"	36"	3.7	1/4	115	5-15P	615	100	
KCSC-96-EFP	6 pan cap	96"	30"	36"	4.8	1/3	115	5-15P	680	100	

Shelleyglas accessories and modifications can be found on pages 62-66.

Specifications and prices subject to change without notice.

GARLAND
 CANADA
 WELBILT DISTRIBUTION

KHCR-BP SERIES - HOT/COLD COMBINATION COUNTERS

KHC-NU SERIES - ICE COOLED HOT/COLD COMBINATION COUNTERS

Product Information

- Save space by having both hot and cold in one convenient location
- One piece, molded fiberglass pylon (base), fully rounded corners, permanent color
- All corners and center sides reinforced with galvanized bracing, laminated into the fiberglass
- Full NSF and UL Certification
- Fire Code rating on fiberglass, laminate, canopy materials
- 14-gauge tops
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Caster mounting plates laminated into base
- Easy to use stainless steel interlock system is standard on base and tray slides
- A maximum 10' long cord and plug are supplied standard
- All KHCR-B and KHC models are standard with enclosed bases
- Top has one to four electrically heated, recessed die-stamped stainless steel hot food warmers. Each warmer accommodates a 12" x 20" x 6" pan (pans supplied by others)
- Wet and dry operation
- Electrical connections are 60 hertz, single phase. Three-phase design is available for an additional charge. Electrical accessories may change listed amperage and plug
- All body cutouts reinforced with 14-gauge channel supports
- Easily modified with a complete array of standard accessories
- Counter heights available from 28" to 36" in 2" increments
- Add eye catching decal packages or bright canopies to create a distinctive look!
- Contact Delfield for a Shelleyglas color chart or visit www.delfield.com
- One year parts and labor standard warranty. Additional warranties available

KHCR-BP ONLY

- The refrigerated cold pan is 7" deep constructed of stainless steel. Cold pan is equipped with a 1" drain with valve. Hot well(s) equipped with a drain with gate valve
- Meets NSF requirements with pans recessed 3"
- Environmentally friendly R290 refrigerant

KHC-NU ONLY

- Insulated ice pan is 7" deep and constructed of 22-gauge stainless steel. Perforated false bottom, and drain with valve is standard
- Hot well(s) with drain(s) manifolded standard to common gate valve



KHCR-50BP
Shown with the following options:
A. 12" stainless steel V fold down tray slide
V. 6" adjustable bullet feet



KHCR2-96-BP
Shown with the following option:
KD. double service flip up sneeze guard



KHC-60-NU
Shown with the following option:
A. 12" stainless steel V fold down tray slide
HD. double service two tier display
V. 6" adjustable bullet feet

Specifications

MODEL NUMBER	HOT WELLS	COLD PAN SIZE	DIMENSIONS			AMP	H.P.	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
			L	D	H							
SHELLEYGLAS SELF-CONTAINED HOT AND COLD COMBINATION COUNTERS												
KHCR-50-BP	1	26" X 21.62"	50"	30"	36"	11.4	1/5	120	5-20P	475	100	
KHCR-60-BP	1	26" X 21.62"	60"	30"	36"	11.4	1/5	120	5-20P	575	100	
KHCR-74-BP	1	39" X 21.62"	74"	30"	36"	11.4	1/5	120	5-20P	688	100	
KH2CR-74-BP	2	26" X 21.62"	74"	30"	36"	13.4	1/5	120/208-230	14-30P	690	100	
KHCR-96-BP	1	65" X 21.62"	96"	30"	36"	12.7	1/4	120	5-20P	730	100	
KH2CR-96-BP	2	52" X 21.62"	96"	30"	36"	14.7	1/4	120/208-230	14-30P	740	100	
KH3CR-96-BP	3	39" X 21.62"	96"	30"	36"	18.4	1/5	120/208-230	14-30P	750	100	
KH4CR-96-BP	4	26" X 21.62"	96"	30"	36"	24.4	1/5	120/208-230	14-50P	760	100	
MODEL NUMBER	HOT WELLS	COLD PAN SIZE	OVERALL			H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
			L	D	H							
SHELLEYGLAS ICE-COOLED HOT AND COLD COMBINATION COUNTERS												
KHC-50-NU	1	26" X 21.62"	50"	30"	36"	—	9.0	120	5-15P	300	100	
KHC-60-NU	1	26" X 21.62"	60"	30"	36"	—	9.0	120	5-15P	350	100	
KHC-74-NU	1	39" X 21.62"	74"	30"	36"	—	9.0	120	5-15P	400	100	
KH2C-74-NU	2	26" X 21.62"	74"	30"	36"	—	11.0	120/208-230	14-20P	410	100	
KHC-96-NU	1	65" X 21.62"	96"	30"	36"	—	9.0	120	5-15P	425	100	
KH2C-96-NU	2	52" X 21.62"	96"	30"	36"	—	11.0	120/208-230	14-20P	430	100	
KH3C-96-NU	3	39" X 21.62"	96"	30"	36"	—	16.0	120/208-230	14-20P	450	100	
KH4C-96-NU	4	26" X 21.62"	96"	30"	36"	—	22.0	120/208-230	14-30P	460	100	

Shelleyglas accessories and modifications can be found on pages 62-66.

Specifications and prices subject to change without notice.

KCFT-NUP SERIES - FROST TOP SERVING COUNTERS



KCFT-60-NUP

Product Information

- One piece, molded fiberglass pylon (base), fully rounded corners, permanent color
- All corners and center sides reinforced with galvanized bracing, laminated into the fiberglass
- Full NSF and UL Certification
- Fire Code rating on fiberglass, laminate, canopy materials
- 14-gauge tops
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Caster mounting plates laminated into base
- Easy to use stainless steel interlock system is standard on base and tray slides
- Enclosed bases for vermin control
- A maximum 10' long cord and plug are supplied standard
- Frost top is 18-gauge stainless steel, one piece construction; perimeter drain with valve located at bottom of unit standard
- 18"x 26" sheet pan can rest on frost top
- On/off switch located on exterior of unit
- Electrical connections are 60 hertz, single phase. Electrical accessories may change listed amperage and plug
- All body cutouts reinforced with 14-gauge channel supports
- Easily modified with a complete array of standard accessories
- Counter heights available from 28" to 36"
- Add eye catching decal packages or bright canopies to create a distinctive look!
- Environmentally friendly R290 refrigerant
- Contact Delfield for a Shelleyglas color chart or visit www.delfield.com
- One year parts and labor standard warranty. Additional warranties available

Specifications

MODEL NUMBER	DESCRIPTION	OVERALL			AMP	H.P.	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
L	D	H									
SHELLEYGLAS FROST TOP SERVING COUNTERS											
Without understorage											
KCFT-36-NUP	frost top	36"	30"	36"	2.4	1/5	115	5-15P	380	100	
KCFT-50-NUP	frost top	50"	30"	36"	2.4	1/5	115	5-15P	455	100	
KCFT-60-NUP	frost top	60"	30"	36"	3.7	1/4	115	5-15P	540	100	
KCFT-74-NUP	frost top	74"	30"	36"	3.7	1/4	115	5-15P	610	110	
KCFT-96-NUP	frost top	96"	30"	36"	4.8	1/3	115	5-15P	680	110	

Shelleyglas accessories and modifications can be found on pages 62-66.

KCI SERIES - ICE PAN SERVING COUNTERS

Product Information

- Best for use where electricity is not available
- One piece, molded fiberglass pylon (base), fully rounded corners, permanent color
- All corners and center sides reinforced with galvanized bracing, laminated into the fiberglass
- Full NSF and UL Certification
- Fire Code rating on fiberglass, laminate, canopy materials
- 14-gauge tops
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Caster mounting plates laminated into base
- Easy to use stainless steel interlock system is standard on base and tray slides
- Insulated ice pan is 7" deep and is standard with the following: perforated false bottom, drain with valve and casters
- KCI units are standard with dry hinged door storage compartment, while KCI-NU units have enclosed bases with no understorage
- All body cutouts reinforced with 14-gauge channel supports
- Easily modified with a complete array of standard accessories
- Add eye catching decal packages or bright canopies to create a distinctive look!
- Contact Delfield for a Shelleyglas color chart or visit www.delfield.com
- One year parts and labor standard warranty. Additional warranties available



KCI-50-NU
Shown with the following options:
E. fold down workshelf
H. two tier display
P. open understorage with shelf

Specifications

MODEL NUMBER	ICE PAN SIZE	L	D	H	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
SHELLEYGLAS ICE PAN SERVING COUNTERS							
With dry understorage							
KCI-36	26" x 21.62"	36"	30"	36"	240	110	
KCI-50	39" x 21.62"	50"	30"	36"	285	110	
KCI-60	52" x 21.62"	60"	30"	36"	320	110	
KCI-74	65" x 21.62"	74"	30"	36"	360	110	
KCI-96	78" x 21.62"	96"	30"	36"	400	110	
Without understorage							
KCI-36-NU	26" x 21.62"	36"	30"	36"	200	110	
KCI-50-NU	39" x 21.62"	50"	30"	36"	245	110	
KCI-60-NU	52" x 21.62"	60"	30"	36"	280	110	
KCI-74-NU	65" x 21.62"	74"	30"	36"	330	110	
KCI-96-NU	78" x 21.62"	96"	30"	36"	380	110	

Shelleyglas accessories and modifications can be found on pages 62-66.

Specifications and prices subject to change without notice.



KCU-36-NU

Shown with the following option:
A. 12" stainless steel V fold down tray slide

Product Information

- One piece, molded fiberglass pylon (base), fully rounded corners, permanent color
- All corners and center sides reinforced with galvanized bracing, laminated into the fiberglass
- Full NSF and UL Certification
- Fire Code rating on fiberglass, laminate, canopy materials
- 14-gauge tops
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Caster mounting plates laminated into base
- A maximum 10' long cord and plug are supplied standard
- Reinforced top includes a stainless steel drain trough with removable stainless steel anti-splash drip gate. (Trough is standard on customer side, available on operator side if specified.)
- KCU models are standard with dry hinged door storage compartment
- All body cutouts reinforced with 14-gauge channel supports
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- Add eye catching decal packages or bright canopies to create a distinctive look!
- Contact Delfield for a Shelleyglas color chart or visit www.delfield.com
- One year parts and labor standard warranty. Additional warranties available

Specifications

MODEL NUMBER	DESCRIPTION	L	D	H	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
SHELLEYGLAS BEVERAGE COUNTERS							
With dry understorage							
KCU-36	24" urn trough	36"	30"	36"	200	125	
KCU-50	36" urn trough	50"	30"	36"	230	125	
KCU-60	48" urn trough	60"	30"	36"	270	125	
KCU-74	60" urn trough	74"	30"	36"	300	125	
KCU-96	82" urn trough	96"	30"	36"	340	125	
Without understorage							
KCU-36-NU	24" urn trough	36"	30"	36"	170	125	
KCU-50-NU	36" urn trough	50"	30"	36"	190	125	
KCU-60-NU	48" urn trough	60"	30"	36"	230	125	
KCU-74-NU	60" urn trough	74"	30"	36"	260	125	
KCU-96-NU	82" urn trough	96"	30"	36"	300	125	

Shelleyglas accessories and modifications can be found on pages 62-66.

KC SERIES - ALL PURPOSE COUNTERS

Product Information

- One piece, molded fiberglass pylon (base), fully rounded corners, permanent color
- All corners and center sides reinforced with galvanized bracing, laminated into the fiberglass
- Full NSF and UL Certification
- Fire Code rating on fiberglass, laminate, canopy materials
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Caster mounting plates laminated into base
- Enclosed bases for vermin control
- Flat 14-gauge stainless steel top
- KC models are standard with dry hinged door storage compartment
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- Add eye catching decal packages or bright canopies to create a distinctive look!
- Contact Delfield for a Shelleyglas color chart or visit www.delfield.com
- One year parts and labor standard warranty. Additional warranties available



KC-28-NU

Shown with the following options:
C. tubular fold down trayslide
P. open understorage with shelf



KC-50-NU

Shown with the following options:
A. 12" stainless steel V fold down tray slide
G. glass front counter protector



KC-74-NU

Shown with optional canopy, sandwich slide and trayslide

Specifications

MODEL NUMBER	DESCRIPTION	L	D	H	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
SHELLEYGLAS ALL PURPOSE COUNTERS							
With dry understorage							
KC-28	dry storage	28"	30"	36"	165	125	
KC-36	dry storage	36"	30"	36"	185	125	
KC-50	dry storage	50"	30"	36"	205	125	
KC-60	dry storage	60"	30"	36"	240	125	
KC-74	dry storage	74"	30"	36"	270	125	
KC-96	dry storage	96"	30"	36"	310	125	
Without understorage							
KC-28-NU	enclosed base	28"	30"	36"	120	125	
KC-36-NU	enclosed base	36"	30"	36"	160	125	
KC-50-NU	enclosed base	50"	30"	36"	180	125	
KC-60-NU	enclosed base	60"	30"	36"	210	125	
KC-74-NU	enclosed base	74"	30"	36"	240	125	
KC-96-NU	enclosed base	96"	30"	36"	280	125	

Shelleyglas accessories and modifications can be found on pages 62-66.

Specifications and prices subject to change without notice.

KCS SERIES - CASHIER'S COUNTERS

KCTS SERIES - TRAY STANDS



KCS-36

Shown with the following option:
(2) E. 10" stainless steel fold-down work shelves (being used as tray slides)

Product Information

- One piece, molded fiberglass pylon (base), fully rounded corners, permanent color
- All corners and center sides reinforced with galvanized bracing, laminated into the fiberglass
- 14-gauge tops
- Full NSF and UL Certification
- Fire Code rating on fiberglass, laminate, canopy materials
- All units are standard on 5" polyurethane swivel locking casters for easy cleaning
- Caster mounting plates laminated into base
- Easy to use stainless steel interlock system is standard on base and tray slides
- Easily modified with a complete array of standard accessories
- All body cutouts reinforced with 14-gauge channel supports
- Contact Delfield for a Shelleyglas color chart or visit www.delfield.com
- One year parts and labor standard warranty. Additional warranties available

KCS SERIES ONLY

- A 3" grommet hole is located at the rear of the top to allow cord access for cash registers
- Stainless steel locking cash drawer standard
- Stainless steel under shelf can serve as foot rest or storage
- All body cutouts reinforced with 14-gauge channel supports
- Add eye catching decal packages or bright canopies to create a distinctive look!

KCTS SERIES ONLY

- All units are standard on 5" diameter swivel casters for easy cleaning and mobility
- Caster mounting plates laminated into base
- Easy to use interlock system is standard on base and tray slides
- 14-gauge stainless steel top and tray step down
- Silverware cutouts and cylinders are optional

Specifications

MODEL NUMBER	DESCRIPTION	L	D	H	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
SHELLEYGLAS CASHIER'S COUNTERS										
KCS-30	cashier's counter	30"	30"	36"	N/A	N/A	N/A	180	100	
KCS-36	cashier's counter	30"	36"	36"	N/A	N/A	N/A	210	100	
KCS-50	cashier's counter	30"	50"	36"	N/A	N/A	N/A	270	100	
SHELLEYGLAS CARVING COUNTERS										
SHELLEYGLAS TRAY STANDS										
KCTS-28	tray stand	30"	28"	36"	N/A	N/A	N/A	150	125	
KCTS-36	tray stand	30"	36"	36"	N/A	N/A	N/A	192	125	


Shelleyglas accessories and modifications can be found on pages 62-66.

SHELLEYSTEEL/SHELLEYGLAS EQUIPMENT ACCESSORIES


Contact factory for pricing.



A. 12" stainless steel V fold-down tray slide




C. 10" three-bar tubular fold-down tray slide




D. 10" composite fold-down cutting board




E. 10" stainless steel fold-down work shelf




G. Glass front counter protector




H. Two-tier display w/glass shelves and sneeze guards




HD. Double service two-tier display with glass shelves and sneeze guards




I. Three-tier display w/glass shelves and sneeze guards




J. 12" stainless steel overshef, 18-gauge




KD. Double service flip-up sneeze guard shown with optional powder coating




KS. Single service flip-up sneeze guard shown with optional powder coating




P. Open shelf understorage




S. Lid locking device




SG16. Pizza pan insert



SG9A. Single mechanical access door to interior
SG9B. Double mechanical access doors to interior - shown



SG22A. Slanted overshef



SG22B. Double slanted overshef

Accessory and
modifications on
pages 82-86.

Specifications and prices subject to change without notice.

SHELLEYSTEEL/SHELLEYGLAS EQUIPMENT ACCESSORIES

CALL FOR PRICE

SHELLEYSTEEL/SHELLEYGLAS BASE ACCESSORIES		-28	-30	-36	-50	-60	-62	-74	-96
**ADD LENGTH OF BASE MODEL TO END OF LETTER FOR ACCESSORY									
B	12" STAINLESS STEEL V STYLE, FOLD-DOWN TRAY SLIDE								
C	10" THREE-BAR TUBULAR FOLD-DOWN TRAY SLIDE								
D	10" COMPOSITE FOLD-DOWN CUTTING BOARD								
E	10" STAINLESS STEEL FOLD-DOWN WORK SHELF								
P	OPEN UNDERSTORAGE WITH SHELF (KH-NU/SH-NU, KCI/SCI-NU, KCU/SCU-NU & KC/SC ONLY) **MUST SPECIFY CENTER SHELF IF REQUIRED								
PR	OPEN UNDERSTORAGE WITH SHELF (KCSC/SCSC, KHC/SHC & KHCR/SHCR ONLY) **SPECIFY CENTER SHELF IF REQUIRED								
FF	EXTRA DRAIN TROUGH FOR DUAL SERVICE (BEVERAGE COUNTERS ONLY)								
X	DECREASE DEPTH OF COLD PAN 1.38" - 5"								
Y	INCREASE DEPTH OF COLD PAN 7" - 12"								
F	LINE-UP INTERLOCK DEVICE (SUPPLIED FOR BASE)								
FD	FIBERGLASS DOOR PANEL INSERT EACH (KCSC ONLY)								
PS	PAN SLIDES (IN REFRIGERATED UNDERSTORAGE ONLY)								
Q	115/15A OUTLET WITH 10A BREAKER* EACH								
QQ-2	2 DRAINS FROM FOOD WELLS, PLUMBED TO COMMON VALVE (ESP 12X20 WELLS)								
QQ-3	3 DRAINS FROM FOOD WELLS, PLUMBED TO COMMON VALVE (ESP 12X20 WELLS)								
QQ-4	4 DRAINS FROM FOOD WELLS, PLUMBED TO COMMON VALVE (ESP 12X20 WELLS)								
QQ-5	5 DRAINS FROM FOOD WELLS, PLUMBED TO COMMON VALVE (ESP 12X20 WELLS)								
QQ-6	6 DRAINS FROM FOOD WELLS, PLUMBED TO COMMON VALVE (ESP 12X20 WELLS)								
ST	STAINLESS STEEL TRIM STRIP EACH (SHELLEYSTEEL ONLY)								
SW-6	(6) SILVERWARE CUTOUTS W/PLASTIC BINS (KCS/SCS & KCTS/SCTS ONLY)								
SW-8	(8) SILVERWARE CUTOUTS W/PLASTIC BINS (KCS/SCS & KCTS/SCTS ONLY)								
U	14" X 30" STAINLESS STEEL END DROP SHELF EACH								
UU	MOLDED FIBERGLASS TRIM STRIP EACH (SHELLEYGLAS ONLY)								
V	ADJUSTABLE STAINLESS STEEL BULLET FEET (SUPPLIED FOR BASE)								
W	THREE PHASE ELECTRICAL SYSTEM (HEATED COUNTERS ONLY)								
LAMINATE EXTERIOR BASE FINISH FOR STANDARD LAMINATE CHOICES. HIGH END LAMINATES SPECIAL RATES APPLY. FOR QUESTIONS ON WHAT CHOICES QUALIFY AS A STANDARD CONSULT WITH FACTORY (SHELLEYSTEEL ONLY)									
SHELLEYSTEEL/SHELLEYGLAS OVERSTRUCTURE ACCESSORIES		-28	-36	-50	-60	-74	-96		
**ADD LENGTH OF BASE MODEL TO END OF LETTER FOR ACCESSORY									
G	SINGLE SERVICE GLASS FRONT COUNTER PROTECTOR								
H	TWO-TIER SINGLE SERVICE DISPLAY W/GLASS SHELVES & SNEEZE GUARD								
HD	DOUBLE SERVICE TWO-TIER DISPLAY WITH SNEEZE GUARD								
I	THREE-TIER SINGLE SERVICE DISPLAY W/GLASS SHELVES & SNEEZE GUARD								
J	12" WIDE STAINLESS STEEL OVERSHELF, SINGLE TIER								
J2	12" WIDE STAINLESS STEEL OVERSHELF, TWO TIER								
KD	DOUBLE SERVICE FLIP-UP SNEEZE GUARD								
KS	SINGLE SERVICE FLIP-UP SNEEZE GUARD								
L	FLUORESCENT LIGHT FIXTURE*								
LED	LED LIGHT FIXTURE*								
LI	INCANDESCENT LIGHT FIXTURE*								
M	RADIANT HEAT LAMP W/ON-OFF SWITCH (FITS G, J, KS, KD)*								
* INCLUSION OF THESE OPTIONS WILL ALTER THE ELECTRICAL SPECIFICATIONS OF UNIT.									
**FOR FLEXISHIELD FOOD SHIELD OPTIONS SEE PAGE 64									

SHELLEYSTEEL/SHELLEYGLAS SERVING LINE ACCESSORIES

Specifications and prices subject to change without notice.

SHELLEYSTEEL/SHELLEYGLAS EQUIPMENT ACCESSORIES

Special Modifications (available on all equipment except where noted)



Accessory	Description	Call for Price
SG1	Backsplash	
	A. 2" x 4" backsplash return on end	
	B. 2" x 4" high backsplash (per foot; 3' minimum)	
SG3	Deck Mounted Outlets	
SG5	Dry Storage Compartments	
	A. Single door	
	B. Double door	
	C. Sliding door on base (36" & 50")	
	D. Sliding door on base (74" & 96")	
	E. Intermediate Shelf, Adjustable (60" max shelf length)	
SG6	Fan Assist Package (Refrigerated cold pans)	
SG7	Ferruled Holes	
	B. 1" diameter (each)	
	C. 2" diameter (each)	
	D. 3" diameter (each)	
SG8	Heated Interior Sections	
	A. Single door with pan slides 15.62" long	
	B. Single door with pan slides 28.62" long	
SG9	Mechanical Access Doors to Interior	
	A. Single door	
	B. Double door	
	C. Single louver door	
SG10	Highlight Finish top edge of unit each unit	
SG11	Modify Standard Height Modify height of unit to height 28", 30", 32", 34" & 36" (only)	
SG12	Shelleyglas Custom lengths	
	SG12-36 (28" - 36" base length)	
	SG12-50 (37" - 50" base length)	
	SG12-60 (51" - 60" base length)	
	SG12-74 (61" - 74" base length)	
	SG12-96 (75" - 96" base length)	
	SG12-138 (97" - 138" base length)	
SG14	Modify Standard Top Depth	
	A-28. 1" to 6"	
	A-36. 1" to 6"	
	A-50. 1" to 6"	
	A-60. 1" to 6"	
	A-74. 1" to 6"	
	A-96. 1" to 6"	
	B-28. 7" to 12"	
	B-36. 7" to 12"	
	B-50. 7" to 12"	
	B-60. 7" to 12"	
	B-74. 7" to 12"	
	B-96. 7" to 12"	
SG15	Paper Cup Dispenser Specify cup manufacturer and rim diameter	
SG16	Pizza Pan Insert	
SG17	Powder Coating (Price per linear inch)	
	A. G Style counter protector	
	B. H Style counter protector	
	C. HD Style counter protector	
	D. I Style counter protector	
	E. KD Style sneeze guard	
	F. KS Style sneeze guard	
	G. Shelley canopy	

Specifications and prices subject to change without notice.

SHELLEYSTEEL/SHELLEYGLAS EQUIPMENT ACCESSORIES

Special Modifications (available on all equipment except where noted)

Accessory	Description	Call for Price
SG17H	Powder Coat Louver Each	
SG18	Push/Pull Handles Stainless steel	
SG19	Heated Tops	
	A. 17.12" x 25.12" recessed 1"	
	B. 20.12" x 26.26" recessed 1"	
	C. 25.12" x 35.25" recessed 1"	
	D. 17.12" x 25.12" flat heated	
	E. 20.12" x 26.26" flat heated	
	F. 25.12" x 35.25" flat heated	
SG20P	Refrigerated Understorage Only fits in 60" or longer units, single door	
	AV. With 1/4 h.p. condensing unit	
	BV. Without condensing unit when added to self-contained KCSC or SCSC models	
SG21	A. Soup Wells 10.5" diameter, with control panel	
	B. Soup Wells 8.5" diameter, with control panel	
SG22	Slanted Overshelves	
	A. Single (per foot; 3' minimum)	
	B. Double (per foot; 3' minimum)	
SG23	Toe Plates Stainless steel (3' minimum)	
SG23B	Extended Sides (3' minimum)	
SG24	Tray Slides 12" wide laminated fold-down style (per foot; add to tray slide price)	
SG24B	Tray Slides Extend 12" Stainless steel V fold down tray slide (per inch, add to tray slide price)	
SG24C	Tray Slides Extend 10" three bar tubular fold down tray slide (per inch, add to tray slide price)	
SG25	Canopy and accessories	
	A. Dome style	
	B. Peak style	
	C. Bus style	
	D. Stationary frame	
	E. Adjustable (tube in tube) frame	
	F. 3" letters	
	G. 2" or 3" stripe on canopy	
SG26	Bus theme, includes, wheels, lights, windshield wipers, striping, license plate, fenders and doors only (does not include canopy, trim strips, lettering or over structure).	
	A. Single side only	
	B. Dual sided bus	
SG27	Boat theme, includes smoke stack with smoke, bow piece, flag, anchor, bell, and name plate (does not include waves, trim stripes or portholes).	
	A. Basic package single/dual	
	B. Portholes	
	C. Wave kick plates (per linear inch)	
SG28	Train/Circus Train theme, includes smoke stack, engine wheels with piston, cow catcher, cab over shelf, bell, and headlight (does not include wheels for following cars, circus animals, canopy, lettering).	
	A. Single side only	
	B. Dual side train engine	
	C. Circus animals	
	D. Balloons, set of three in cluster	
	E. Set of two wheels per side for following cars	



Other custom theme packages available upon request, please contact factory for special pricing

Specifications and prices subject to change without notice.

GARLAND
CANADA
WELBILT DISTRIBUTION

SHELLEYSTEEL/SHELLEYGLAS EQUIPMENT ACCESSORIES

Special Modifications (available on all equipment except where noted)

Accessory	Description	Call for Price
SG29	Rocket theme, includes nose cone, graphics, and tail wing (does not include trim strips).	
	A. Single side only	
	B. Dual sided rocket	
SG30	Standoff Decor Panel, 18"x18" Shelleyglas/Shelleysteel	
SG31	Standoff Decor Panel, Flexible size Shelleyglas/Shelleysteel/Concepts	
SG32	Shelley Wing Wall (per linear foot)	
SG32A	Tempered Glass in Lieu of Standard, Single Tier	
SG32B	Tempered Glass in Lieu of Standard, Double Tier	
SG32C	3" adjustable height caster, 3" adjustable (set of 4)	
SG33	Recessed Wells for 18" x 26" Sheet Pan	
	A. Shelleyglass 36"	
	B. Shelleyglass 50"	
	C. Shelleyglass 64"	
	D. Shelleyglass 78"	
	E. Shelleyglass 96"	
	F. Shelleysteel 36"	
	G. Shelleysteel 50"	
	H. Shelleysteel 62"	
	I. Shelleysteel 76"	
	J. Shelleysteel 96"	
SG34A	Cash Drawer Insert	
SG34B	Cash Counter Tubular Foot Rest	
SG35	Frost Top Grate (per foot with 1 ft minimum)	
SG36	Shelley Correctional Package	
TE	Top extensions (added to base as flat top area)	
TE option should only be used for standard length units. Please contact the factory for custom length pricing.		
	TE8. 8" extension	
	TE10. 10" extension	
	TE14. 14" extension	
	TE22. 22" extension	
	TE24. 24" extension	
	TE32. 32" extension	
	TE36. 36" extension	
	TE38. 38" extension	
ESP	Energy savings power hot food well - per well (standard without drains)	
LH	Narrow Halogen Heatlamp, 18" Minimum length	
LHX	Narrow Halogen Heatlamp with Xenon Lights, 18" Minimum length	
LX	Narrow Xenon Display Lights, 18" Minimum length	
Spacer Options		
The spacer option (wainscot) includes top, interlocks and legs.		
Please specify fiberglass, stainless steel or laminate when ordering.		
	KSPC. Fiberglass spacer	
	SSPC. Stainless steel spacer	
	LSPC. Laminate spacer	
Power Pole Options		
	PP21-30. 120/208 volt, 3-phase, 30 amp pole	
	PP14-50. Locking 120/208 volt, single-phase, 50 amp pole	

Specifications and prices subject to change without notice.

200P/300P

Drop-In Freezers, Water Stations, and Ice Chests

N8000 - Ice Cooled Cold Pans

N8100P - Drop-In Cold Pans

N8200P - Frost Tops

8100EFP - LiquiTec® Refrigerated Cold Pans

N8600P - Combination Hot/Cold Wells

N8700 - Heated Food Wells

N8800 - Single Tank Hot Food Wells

N8000N - Narrow Line Drop Ins

DIS - Drop-In Dish Dispensers

CD and ND

Drop-In Cup, Napkin and Tray Dispensers

LT- Drop-In Tray and Rack Dispensers



200 SERIES - FREEZERS, WATER STATIONS, UNDERCOUNTER SINK AND FAUCETS 300 SERIES - ICE CHEST AND GLASS FILLER

Product Information

N225P-N227P SERIES ONLY

- 18-gauge stainless steel top construction
- 26.81" overall height
- Die stamped top opening with raised edge
- High-density polyurethane foam throughout unit
- Freezer tank is constructed of 2BF with large cleanout radii
- Mechanically cooled 0° to 5° tank storage temperatures meeting NSF and UL requirements
- Folding removable cover with black rubber external handle for easy grip
- 9' cord and plug
- Durable 16-gauge compressor cage
- Environmentally friendly R290 refrigerant
- Electronic temperature controls
- Non-marring press fit gasket
- Stainless steel louver sent loose for field installation
- Suitable for ice cream storage.

240 SERIES ONLY

- 20-gauge stainless steel top and body
- One piece stainless lift off cover with handle
- Stainless steel interior liner with coved corners
- 1" diameter drain plumbed out the bottom
- High-density polyurethane foam throughout unit

203/305 SERIES ONLY

- 20-gauge stainless steel top with raised die stamped opening
- Galvanized exterior body
- One piece stainless lift off cover with handle
- 1" diameter drain plumbed out the bottom
- High-density polyurethane foam throughout unit
- 305: ABS plastic interior line with coved corners
- 203: stainless steel interior liner with coved corners

204 SERIES ONLY


- 18-gauge stainless steel top with raised die stamped opening
- One piece stainless lift off cover with handle
- ABS plastic interior liner with coved corners
- 1" diameter drain plumbed out the bottom
- High-density polyurethane foam throughout unit
- Exterior tank is made of galvanized steel
- Glass filler is 9.5" high, over a die stamped drain opening fitted with chrome plated wire strainer

307 SERIES ONLY

- Glass filler is 9.5" high, over a die stamped drain opening fitted with chrome plated wire strainer

ALL UNITS:

- One year parts and labor standard warranty. Additional warranties available



N227P



204

Specifications and Prices

MODEL NUMBER	L	OVERALL D	H	CUTOUT SIZE	CABINET CAPACITY	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
DROP-IN FREEZERS												
N225P	17.06"	27.41"	26.75"	26.62" x 16.12"	6 gal.	0.20	1.8	115	5-15P	115	92.5	\$9,145
N227P	30.58"	27.41"	26.75"	26.62" x 29.62"	12 gal.	0.25	2.9	115	5-15P	191	92.5	\$11,845

MODEL NUMBER	DESCRIPTION	L	OVERALL D	H	CUTOUT SIZE	ICE CAPACITY	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
WATER STATIONS AND ICE STORAGE									
203	ice chest	20.50"	20.50"	23.25"	19.25" x 19.25"	90 lbs.	52	85	\$3,460
204	water & ice station	24"	21"	22.6"	21" x 17.75"	45 lbs.	47.5	85	\$3,530
204-P	water & ice station	24"	21"	26.35"	21" x 17.75"	45 lbs.	47.5	85	\$4,165
240	ice chest with cover	21"	17.5"	17"	—	75 lbs.	36	85	\$4,220
240P	ice chest with cover	21"	17.5"	17"	—	75 lbs.	36	85	\$4,445
305	ice chest with cover	21.25"	15.25"	13"	17.75" x 12.5"	45 lbs.	18	85	\$2,080
307	glass filler	12"	12"	9.5"	—	—	7	85	\$1,210
307-P	pitcher filler	12"	12"	13.25"	—	—	7	85	\$1,840



240

Drop-in accessories and modifications can be found on page 78.

N8000 SERIES - ICE COOLED COLD PANS

N8100BP SERIES - MECHANICALLY COOLED COLD PANS

N8000N SERIES - NARROW ICE COOLED COLD PANS

N8100NP SERIES - NARROW MECHANICALLY COOLED COLD PANS



N8156BP

Product Information

N8000 SERIES ONLY

- 20-gauge stainless steel top construction
- 2 BF stainless steel interior liner
- Sectional removable perforated bottoms
- Adapter bars are provided standard for 12" x 20" openings
- Standard 1" plastic drain
- High density polyurethane foam insulation throughout unit
- Galvanized exterior body
- Custom sizes available
- Non-marring press fit top gasket is supplied standard
- NSF-2 certified
- One year parts and labor standard warranty. Additional warranties available

N8100BP/8100NP SERIES ONLY

- 20-gauge stainless steel top construction
- 2 BF stainless steel interior liner wrapped and spot clipped with refrigeration lines; thermal transfer compound is applied for superior cooling
- V-stamped pan rest recessed 2"
- Mechanically cooled system
- Adapter bars are provided standard for

- 12" x 20" openings
- Standard 1" plastic drain
- High density polyurethane foam insulation throughout unit
- Galvanized exterior body
- Non-marring press fit top gasket is supplied standard
- NSF-7 certified
- Condensing unit is suspended below on a 16-gauge galvanized frame
- R290 refrigerant
- 8' cord is standard
- Stainless steel louver is provided for field installation
- Custom sizes available
- One year parts and labor standard warranty. Additional warranties available

Specifications and Prices

MODEL NUMBER	L	OVERALL D	H	12 X 20 PANS HELD	CUTOUT SIZE	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
ICE COOLED COLD PANS 8" pan depth Adapter bars and perforated bottoms standard												
N8018	18"	26"	10.75"	1	17" X 25"	N/A	N/A	N/A	N/A	38	85	\$3,125
N8030	30.75"	26"	10.75"	2	29.75" X 25"	N/A	N/A	N/A	N/A	84	85	\$3,455
N8043	43.5"	26"	10.75"	3	42.50" X 25"	N/A	N/A	N/A	N/A	110	85	\$3,980
N8056	56.25"	26"	10.75"	4	55.25" X 25"	N/A	N/A	N/A	N/A	139	85	\$4,650
N8069	69"	26"	10.75"	5	68" X 25"	N/A	N/A	N/A	N/A	160	85	\$5,195
N8081	81.75"	26"	10.75"	6	80.75" X 25"	N/A	N/A	N/A	N/A	197	85	\$6,125
MECHANICALLY COOLED PANS 8" pan depth Adapter bars standard												
N8118BP	18"	26"	21.87"	1	17" X 25"	1/6	2	115	5-15P	100	85	\$8,825
N8130BP	30.75"	26"	21.87"	2	29.75" X 25"	1/6	2	115	5-15P	140	85	\$9,415
N8143BP	43.5"	26"	21.87"	3	42.50" x 25"	2/7	3.1	115	5-15P	173	85	\$10,235
N8156BP	56.25"	26"	21.87"	4	55.25" x 25"	2/7	3.1	115	5-15P	205	85	\$11,000
N8169BP	69"	26"	21.87"	5	68" x 25"	2/7	3.1	115	5-15P	225	85	\$11,960
N8181BP	81.75"	26"	21.87"	6	80.75" x 25"	1/3	4.6	115	5-15P	258	85	\$13,290
NARROW LINE DROP-INS												
Ice cooled cold pans												
N8046N	46.75"	18"	10.75"	2	45.75" x 17"	N/A	N/A	N/A	N/A	100	85	\$3,455
N8068N	67.5"	18"	10.75"	3	66.5" x 17"	N/A	N/A	N/A	N/A	120	85	\$3,980
NARROW LINE DROP-INS												
Mechanically cooled cold pans												
N8146NBP	46.75"	18"	21.81"	2	45.75" x 17"	1/6	2	115	5-15P	175	85	\$9,695
N8168NBP	67.50"	18"	21.81"	3	66.5" x 17"	1/6	2	115	5-15P	240	85	\$10,540

Drop-in accessories and modifications can be found on page 78.

8100-EFP SERIES - LIQUITEC® REFRIGERATED COLD PANS

Product Information

8100-EFP SERIES ONLY

- 18-gauge stainless steel top construction
- 2BF stainless steel liner wrapped and spot clipped with refrigeration lines; thermal transfer compound is applied for superior cooling
- Mechanically cooled system
- Flush mounted die stamped drawn 12" x 20" individual 20-gauge wells
- Wells to be depressed slightly into the top to hold condensation
- Standard 1/2" stainless steel drain
- High density polyurethane foam insulation throughout unit
- Galvanized exterior body
- Thermostatic temperature with OFF position and expansion valve standard
- Non-marring press fit top gasket is supplied standard
- NSF7 certified
- Condensing unit is suspended below on a 16-gauge galvanized frame
- Environmentally friendly R290 refrigerant
- 8' cord is standard
- Stainless steel louver is provided standard for field installation
- "EFN" slimline models run 12" x 20" well left to right instead of front to back
- One year parts and labor standard warranty. Additional warranties available



8145-EFP

Specifications and Prices

MODEL NUMBER	L	OVERALL D	H	CUTOUT SIZE	12 x 20 PANS HELD	AMPS	H.P.	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
LiquiTec® EUTECTIC FLUID REFRIGERATED COLD PANS												
8118-EFP	18.20"	26"	23.25"	17" x 25"	1	2.4	1/5	115	5-15P	169	85	\$11,745
8132-EFP	31.76"	26"	23.25"	30.75" x 25"	2	2.4	1/5	115	5-15P	215	85	\$12,945
8145-EFP	45.32"	26"	23.25"	44.25" x 25"	3	3.7	1/4	115	5-15P	265	85	\$14,070
8159-EFP	58.88"	26"	23.25"	57.87" x 25"	4	3.7	1/4	115	5-15P	285	85	\$15,110
8172-EFP	72.44"	26"	23.25"	71.5" x 25"	5	4.8	1/3	115	5-15P	295	85	\$16,440
8186-EFP	86"	26"	23.25"	85.0" x 25"	6	4.8	1/3	115	5-15P	394	85	\$17,755

MODEL NUMBER	L	OVERALL D	H	CUTOUT SIZE	12 x 20 PANS HELD	AMPS	H.P.	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
LiquiTec® SLIM LINE EUTECTIC FLUID REFRIGERATED COLD PANS												
8148-EFNP	47.66"	18"	23.25"	46.88" x 17.25"	2	2.4	1/5	115	5-15P	235	85	\$13,800
8169-EFNP	69.22"	18"	23.25"	68.50" x 17.25"	3	2.4	1/4	115	5-15P	285	85	\$16,585
8191-EFNP	90.78"	18"	23.25"	90" x 17.25"	4	3.7	1/4	115	5-15P	295	85	\$17,900

Drop-in accessories and modifications can be found on page 78.


Specifications and prices subject to change without notice.

N8200P SERIES - FROST TOPS


N8200GP SERIES - GRANITE COLD SLAB

N8200-STP SERIES - SHEET PAN FROST TOPS


Product Information



N8259P



N8245GP



N8256-STP

N8200P SERIES ONLY

- 18-gauge stainless steel top construction
- Top has integral drain trough and 2.00" overhang around perimeter
- Top is elevated 1.68" above counter surface and angles approximately 45° into the trough
- The bottom interior of the top is serpentine wrapped, taped, then foamed with high density polyurethane foam insulation.
- Exterior body is galvanized steel
- Condensing unit is suspended below on a 16-gauge galvanized frame
- Environmentally friendly R290 refrigerant
- 8' cord is standard
- Stainless steel louver is provided standard for field installation
- Custom sizes available
- Standard 1/2" stainless steel tubing drain
- Unit is equipped with an on/off switch
- Non-marring press fit top gasket is supplied standard
- NSF certified

N8200-STP SERIES ONLY

- Recessed stainless steel top with full perimeter drain trough and 1/2" drain

N8200GP SERIES ONLY

- 14-gauge stainless steel top with "Absolute Black" granite
- Thermal transfer compound installed between stainless steel and granite top
- Top has integral drain trough 1.5" deep around perimeter
- Top is elevated 1.25" above counter surface
- Unit foamed with high density polyurethane insulation
- Exterior body is galvanized steel
- Condensing unit is suspended below on a 16-gauge galvanized steel frame
- Environmentally friendly R290 refrigerant
- 8' cord is standard
- Stainless steel louver is provided standard for field installation
- Standard 3/4" stainless steel drain
- Unit is equipped with an ON/OFF switch
- NSF certified

ALL UNITS

- One year parts and labor standard warranty. Additional warranties available

Specifications and Prices

MODEL NUMBER	L	OVERALL D	H	12 x 20 PANS HELD	CUTOUT SIZE	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
FROST TOPS												
N8231P	31.75"	26"	15.75"	—	30.75" x 25"	1/5	2.4	115	5-15P	142	85	\$10,045
N8245P	45.63"	26"	15.75"	—	44.63" x 25"	1/5	2.4	115	5-15P	168	85	\$10,440
N8259P	59.5"	26"	15.75"	—	58.50" x 25"	1/4	3.7	115	5-15P	193	85	\$11,320
N8273P	73.38"	26"	15.75"	—	72.38" x 25"	1/4	3.7	115	5-15P	209	85	\$12,105
N8287P	87.25"	26"	15.75"	—	86.25" x 25"	1/3	4.8	115	5-15P	239	85	\$13,340

MODEL NUMBER	L	OVERALL D	H	12 x 20 PANS HELD	CUTOUT SIZE	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
GRANITE COLD SLAB												
N8231GP	31.75"	25.87"	19"	—	30.75" x 25"	1/5	2.4	115	5-15P	227	85	\$13,930
N8245GP	45.63"	25.87"	19"	—	44.63" x 25"	1/4	3.7	115	5-15P	330	85	\$15,830
N8259GP	59.5"	25.87"	19"	—	58.50" x 25"	1/3	4.8	115	5-15P	433	85	\$18,820
N8273GP	73.38"	25.87"	19"	—	72.38" x 25"	1/3	4.8	115	5-15P	536	85	\$20,590

MODEL NUMBER	L	OVERALL D	H	18 x 26 PANS HELD	CUTOUT SIZE	H.P.	AMP	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
FROST TOPS - Sheet pan												
N8230-STP	29.60"	22"	15.70"	1-Long left to right	28.60" x 21.10"	1/5	2.4	115	5-15P	142	85	\$10,475
N8240-STP	39.70"	29.60"	15.70"	2-Tall left to right	38.60" x 28.75"	1/4	3.7	115	5-15P	168	85	\$10,545
N8256-STP	55.60"	22"	15.70"	2-Long left to right	54.60" x 21.10"	1/5	2.4	115	5-15P	193	85	\$11,745
N8258-STP	57.60"	29.60"	15.70"	3-Tall left to right	56.60" x 28.75"	1/4	3.7	115	5-15P	209	85	\$12,540
N8275-STP	75.50"	29.60"	15.70"	4-Tall left to right	74.50" x 28.75"	1/3	4.8	115	5-15P	239	85	\$13,765

Drop-in accessories and modifications can be found on page 78.

Specifications and prices subject to change without notice.

N8600P SERIES - COMBINATION HOT/COLD WELLS N8800 SERIES - SINGLE TANK HOT FOOD WELLS

Product Information

N8600P SERIES ONLY

- Dual temp hot or cold operation
- 20-gauge stainless steel top construction
- Single "wet only" well with immersion heater(s) and 1" stainless steel drain
- Adapter bars standard to accommodate 12"x20" pans
- Remote control panel with 3-way Hot/Off/Cold power switch and thermostatic control for hot operation
- Thermostat for cold operation located by condensing unit
- Non-marring press fit top gasket is supplied standard
- High density polyurethane foam insulation throughout unit
- Stainless steel liner wrapped with spot clipped refrigeration lines; thermal transfer compound applied for superior cooling
- Galvanized exterior body
- Condensing unit suspended below on a 16-gauge galvanized frame
- R290 refrigeration system with thermostatic

expansion valve

- Unit must be hard wired in field
- Stainless steel louver is provided standard for field installation

N8800 SERIES ONLY

- Adapter bars provided standard to accommodate 12" x 20" pans
- Single wet only well 8" deep made of 316 series stainless kinked to stainless 1" drain
- Single thermostatic temperature control wired to (1) main control panel with 2' of conduit and wire. Field install control panel at locations

ALL UNITS

- One year parts and labor standard warranty. Additional warranties available



N8656P



N8845

Specifications and Prices

MODEL NUMBER	OVERALL			12 x 20 PANS HELD	CUTOUT SIZE	H.P.	AMP	VOLTS	WATTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
	L	D	H										
COMBINATION HOT/COLD FOOD WELLS 8" pan depth Pilot indicator lights included													
N8630P	30.75"	26"	25.75"	2	29.75" x 25"	1/5	25.0	120	3000	N/A	164	85	\$17,385
N8643P	43.5"	26"	25.75"	3	42.50" x 25"	1/5	21.0	120/240	5000	N/A	198	85	\$18,280
N8656P	56.25"	26"	25.75"	4	55.25" x 25"	1/4	21.0	120/240	5000	N/A	233	85	\$20,020
N8669P	69"	26"	25.75"	5	68" x 25"	1/4	42.0	120/240	10000	N/A	266	85	\$21,600
N8681P	81.75"	26"	25.75"	6	80.75" x 25"	1/3	42.0	120/240	10000	N/A	301	85	\$24,080
SINGLE TANK HOT FOOD WELLS 6" pan depth Pilot light included													
N8831	31.75"	26"	11"	2	30.75" x 25"	N/A	17.0	120	2000	N/A	100	92.5	\$4,810
N8845	45.63"	26"	11"	3	44.63" x 25"	N/A	15/16	208-230	3000/3600	N/A	136	92.5	\$5,650
N8859	59.5"	26"	11"	4	58.5" x 25"	N/A	20/22	208-230	4000/4800	N/A	158	92.5	\$6,400
N8873	73.38"	26"	11"	5	72.38" x 25"	N/A	24/27	208-230	5000/6000	N/A	195	92.5	\$7,380
N8887	87.25"	26"	11"	6	86.25" x 25"	N/A	29/32	208-230	6000/7200	N/A	224	92.5	\$8,270

Drop-in accessories and modifications can be found on page 78.

Specifications and prices subject to change without notice.

N8700 SERIES - HEATED FOOD WELLS

N8700N SERIES - INDIVIDUALLY HEATED NARROW FOOD WELLS



N8787-D

Product Information

N8700ND SERIES ONLY

- Top is constructed of 18-gauge stainless steel
- Flush mounted die stamped drawn 12" x 20" individual 20-gauge wells
- Wells to be depressed slightly into the top to hold in condensation
- Standard 1/2" stainless steel drain(s)
- Non-marring press fit top gasket is supplied standard
- Must be hard wired in the field
- Wet and dry operation
- 11.87" x 19.87" single hot food wells are manifolded together standard to one main gate valve
- Unit shall be insulated on all sides with 1" of fiberglass and bottom to have 2" of fiberfrax blanket insulation
- Individual infinite temperature controls standard wired to one main control panel with 4' of conduit and wire. Field install control panel at location
- Galvanized exterior body

N8700N SERIES ONLY

- Top is constructed of 18-gauge stainless steel
- Flush mounted die stamped drawn 12" x 20" individual 20-gauge wells
- Wells to be depressed slightly into the top to hold in condensation
- Standard 1/2" stainless steel drain(s)
- Non-marring press fit top gasket is supplied

standard

- Must be hard wired in the field
- Wet and dry operation
- 11.87" x 19.87" single hot food wells are manifolded together standard to one main gate valve
- Unit shall be insulated on all sides with 1" of fiberglass and bottom to have 2" of fiberfrax blanket insulation
- Individual infinite temperature controls standard wired to one main control panel with 4' of conduit and wire. Field install control panel at location
- Galvanized exterior body

ALL UNITS

- One year parts and labor standard warranty. Additional warranties available

Specifications and Prices

MODEL NUMBER	OVERALL			12 x 20 PANS HELD	CUTOUT SIZE	H.P.	AMP	VOLTS	WATTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
	L	D	H										
INDIVIDUALLY HEATED FOOD WELLS (with drains and manifold 6" pan depth)													
<i>Pilot lights included 208-230 volt system</i>													
N8717-D	17.88"	26"	9.5"	1	16.88" x 25"	—	8.3	120	1000	N/A	41	85	\$3,545
N8731-D	31.75"	26"	9.5"	2	30.75" x 25"	—	16.6	120	2000	N/A	99	85	\$5,570
N8745-D	45.63"	26"	9.5"	3	44.62" x 25"	—	15.0/16.0	208/230	3000/4000	N/A	134	85	\$7,670
N8759-D	59.5"	26"	9.5"	4	58.5" x 25"	—	20.0/22.0	208/230	4000/4800	N/A	166	85	\$9,975
N8773-D	73.38"	26"	9.5"	5	72.37" x 25"	—	24.0/27.0	208/230	5000/6000	N/A	186	85	\$12,635
N8787-D	87.25"	26"	9.5"	6	86.25" x 25"	—	29.0/32.0	208/230	6000/7200	N/A	236	85	\$15,070
INDIVIDUALLY HEATED NARROW FOOD WELLS WITH DRAINS													
N8746ND	45.61"	15.87"	9.5"	2	44.62" x 15"	N/A	17.0	120	2000	N/A	100	85	\$5,570
N8768ND	67.48"	15.87"	9.5"	3	66.50" x 15"	N/A	15/16	208-230	3000/3600	N/A	130	85	\$7,895
INDIVIDUALLY HEATED NARROW FOOD WELLS WITHOUT DRAINS													
N8768N	67.48"	15.87"	9.5"	3	66.50" x 15"	N/A	15/16	208-230	3000/3600	N/A	130	85	\$7,305

N8700D - 14" overall height including drain connection.

Drop-in accessories and modifications can be found on page 78.

Specifications and prices subject to change without notice.

N8700-DESP SERIES -LOW WATT HOT FOOD WELLS

Product Information

- Energy Savings Power Hot Food Well
- Top is constructed of 18-gauge stainless steel
- Flush mounted die stamped drawn 12" x 20" individual 20-gauge wells
- Wells depressed slightly into the top to hold in condensation
- Standard 1/2" stainless steel drain(s)
- Non-marring press fit top gasket
- Must be hard wired in the field
- Wet and dry operation
- 11.87" x 19.87" single hot food wells are manifolded together standard to one main gate valve
- Unit shall be insulated on the bottom and all sides with 1" of fiberglass
- Individual digital temperature controls standard wired to one main control panel with 4' of conduit and wire. Field install control panel at location
- Galvanized exterior body
- One year parts and labor warranty



N8759-DESP

Specifications and Prices

MODEL NUMBER	OVERALL			12 x 20 PANS HELD	CUTOUT SIZE	AMP	VOLTS	WATTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
	L	D	H									
INDIVIDUALLY HEATED FOOD WELLS (with drains and manifold 6" pan depth)												
<i>Pilot lights included 208-230 volt system</i>												
N8717-DESP	17.89"	26"	9.5"	1	16.87" x 25"	2.4/2.7	208/230	500	N/A	41	85	\$4,305
N8731-DESP	31.76"	26"	9.5"	2	30.75" x 25"	4.8/5.4	208/230	1000	N/A	99	85	\$6,830
N8745-DESP	45.63"	26"	9.5"	3	44.62" x 25"	7.2/8.1	208/230	1500	N/A	134	85	\$9,590
N8759-DESP	59.5"	26"	9.5"	4	58.5" x 25"	9.6/10.8	208/230	2000	N/A	166	85	\$12,845
N8773-DESP	73.37"	26"	9.5"	5	72.37" x 25"	12.0/13.5	208/230	2500	N/A	186	85	\$15,795
N8787-DESP	87.24"	26"	9.5"	6	86.25" x 25"	14.4/16.2	208/230	3000	N/A	236	85	\$18,285

Drop-in accessories and modifications can be found on page 78.

Specifications and prices subject to change without notice.

Product Information

DIS SERIES ONLY

- Top flange and bottom brace to be 18-gauge stainless steel
- Vertical side channels to be 22-gauge stainless steel
- Flange, channels and bottom to be integrally welded
- Spring supports to be 14-gauge stainless steel
- Carrier head made of welded rods with a removable 18-gauge top plate
- Self-leveling mechanism, field adjustable by adding or removing springs
- High impact plastic guide posts mounted to flange
- One year parts and labor standard warranty. Additional warranties available

- Convection heating module and fan motor
- Air intake shall be filtered
- On/off switch and adjustable thermostat
- Outer 22-gauge stainless steel jacket
- QT- Shall have a stainless steel cover
- ET- Maintains temperatures between 120-140°F (49-60°C)
- QT- Maintains temperatures between 150-170°F (66-77°C)
- One year parts and labor standard warranty. Additional warranties available



DIS-1013ET
with optional adjustment rods

DIS-ET/QT SERIES ONLY

- 4' cord and plug

Specifications

MODEL NUMBER	FLANGE DIAMETER	HEIGHT	CUTOUT DIAMETER	DISH DIAMETER*	AMPS	VOLTS	NEMA PLUG	WATT	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
DROP-IN DISH DISPENSERS											
Unheated											
DIS-500	8.37"	27.38"	7.75"	3"-5"	N/A	N/A	N/A	N/A	7	100	
DIS-575	9.12"	27.38"	8.5"	5"-5.75"	N/A	N/A	N/A	N/A	8	100	
DIS-650	9.87"	27.38"	9.25"	5.75"-6.5"	N/A	N/A	N/A	N/A	9	100	
DIS-725	10.62"	27.38"	10"	6.5"-7.25"	N/A	N/A	N/A	N/A	10	100	
DIS-813	11.5"	27.38"	10.87"	7.25"-8.12"	N/A	N/A	N/A	N/A	11	100	
DIS-913	12.5"	27.38"	11.87"	8.13"-9.12"	N/A	N/A	N/A	N/A	12	100	
DIS-1013	13.5"	27.38"	12.87"	9.13"-10.12"	N/A	N/A	N/A	N/A	13	100	
DIS-1200	15.38"	27.38"	14.75"	10.13"-12"	N/A	N/A	N/A	N/A	15	100	
DIS-1450	17.88"	27.38"	17.25"	12"-14.5"	N/A	N/A	N/A	N/A	17	100	
Even Temp heated dispensers											
DIS-500-ET	8.37"	27.38"	7.75"	3"-5"	5.5	120	5-15P	400	17	125	
DIS-575-ET	9.12"	27.38"	8.5"	5"-5.75"	5.5	120	5-15P	400	17	125	
DIS-650-ET	9.87"	27.38"	9.25"	5.75"-6.5"	5.5	120	5-15P	400	19	125	
DIS-725-ET	10.62"	27.38"	10"	6.5"-7.25"	5.5	120	5-15P	400	21	125	
DIS-813-ET	11.5"	27.38"	10.87"	7.25"-8.12"	5.5	120	5-15P	700	24	125	
DIS-913-ET	12.5"	27.38"	11.87"	8.12"-9.12"	5.5	120	5-15P	700	25	125	
DIS-1013-ET	13.5"	27.38"	12.87"	9.12"-10.12"	5.5	120	5-15P	700	27	125	
DIS-1200-ET	15.37"	27.38"	14.75"	10.12"-12"	5.5	120	5-15P	700	32	125	
DIS-1450-ET	17.87"	27.38"	17.25"	12"-14.5"	5.5	120	5-15P	700	37	125	

Drop-in accessories and modifications can be found on page 78.

*Non-marring rods for oval dishes and diameter adjustment available as an option.

Note: Non-Marring Rods reduces allowable dish diameter by 1.25". Non-Marring Rods factory recommended for DIS-1200 with plate diameter of 10.13" - 10.75" and DIS-1450 with plate diameter of 12" - 13.25". Please consult with factory to confirm operational fit.



DIS-650

DROP-INS/BUILT-INS

CD SERIES - CUP DISPENSERS ND SERIES - NAPKIN DISPENSERS



CD

Product Information

CD SERIES ONLY

- Dispenser tube with support flange
- Elevating mechanism consists of stainless steel spring and three equally spaced stainless steel friction strips fastened to a stainless steel collar
- Two compression springs are provided; one for paper cups, and one for foam cups
- Dispenser capacities will vary depending on the style of cup

ND SERIES ONLY

- Top flange to be 18-gauge stainless steel
- Dispenser bottom to be 22-gauge stainless steel
- Dispenser body shall have four 22-gauge vertical angle guides integrally welded to the top flange and bottom
- Carrier head to be 22-gauge stainless steel
- Two extension springs support the carrier head
- Napkin cover to be 20-gauge stainless steel and

- snaps onto flange
- All models hold up to 500 paper napkins at an 18.00" stack height, capacity will vary
- Special heights available

ALL UNITS

- One year parts and labor standard warranty. Additional warranties available

Specifications

MODEL NUMBER	FLANGE DIAMETER	HEIGHT	CUTOUT DIAMETER	DISH DIAMETER	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
DISPOSABLE CUP DISPENSERS							
CD	7.38"	24.5"	5.12"	2.5"-4.63"	15lbs.	100	
CD-SS	7.38"	24.5"	5.12"	2.5"-4.63"	15lbs.	100	

MODEL NUMBER	L	OVERALL D	H	CUTOUT DIMENSION	NAPKIN DIMENSIONS	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
NAPKIN DISPENSERS								
ND-45	7.62"	6"	24"	5.62"x 7"	4" x 5.37"	12	100	
ND-47	9.37"	6.25"	24"	5.87"x 8.75"	4.25" x 7.12"	12	100	
ND-48	10.25"	6.25"	24"	6.12"x 9.62"	4.5" x 8"	16	100	
ND-57	9.25"	7.12"	24"	6.75"x 8.62"	5.12" x 7"	16	100	
ND-59	11"	6.75"	24"	6.37"x 10.37"	4.75" x 8.75"	12	100	
ND-67	9.37"	8.17"	24"	8.5"x 8.75"	6.87" x 7.12"	12	100	

Drop-in accessories and modifications can be found on page 78.

LT SERIES - DROP IN TRAY AND RACK DISPENSERS

Product Information

LT SERIES ONLY

- Top flange and bottom support to be 16-gauge stainless steel
- Dispenser body shall have four 14-gauge uprights, reinforced with 14-gauge stainless steel angles
- Top flange, uprights and bottom support to be integrally welded
- Dispenser platform carrier shall be 18-gauge stainless steel and removable for cleaning
- Self-leveling mechanisms shall be adjustable by adding and removing stainless steel extension springs located inside the elevator housing
- One year parts and labor standard warranty. Additional warranties available



LT-1418

Specifications

MODEL NUMBER	L	OVERALL D	H	CUTOUT DIMENSION	MAXIMUM TRAY SIZE	AMP	SHIP WEIGHT	FREIGHT CLASS	CALL FOR PRICE
DROP-IN TRAY AND RACK DISPENSERS									
LT-1014	15.75"	22.12"	27.5"	11.75" x 21"	10" x 15"	N/A	43	100	
LT-1216	21.75"	19.12"	27.5"	17.75" x 18"	12" x 16"	N/A	43	100	
LT-1221	26.75"	19.12"	27.5"	22.75" x 18"	12" x 21"	N/A	45	100	
LT-1418	23.75"	21.12"	27.5"	19.75" x 20"	14" x 18"	N/A	43	100	
LT-1422	27.75"	21.12"	27.5"	23.75" x 20"	14" x 22"	N/A	45	100	
LT-1622	27.75"	23.12"	27.5"	23.75" x 22"	16" x 22"	N/A	45	100	
LT-1826	31.75"	25.12"	27.5"	27.75" x 24"	18" x 26"	N/A	48	100	
LT-2020	26.75"	27.12"	27.5"	22.75" x 26"	20" x 21"	N/A	45	100	
TWO STACK, DROP-IN TRAY AND RACK DISPENSERS									
LT2-1014	27.75"	22.13"	27.5"	23.75" x 21"	10" x 15"	N/A	48	100	
LT2-1216	23.12"	31.75"	27.5"	27.75" x 22"	12" x 16"	N/A	48	100	
LT2-1221	31.75"	28.13"	27.5"	27.75" x 27"	12" x 21"	N/A	48	100	

Drop-in accessories and modifications can be found on page 78.

DROP-INS/BUILT-INS

Specifications and prices subject to change without notice.

DROP IN AND BUILT IN ACCESSORIES

N8100NP
(AS000-BMU-0033) ----- **CALL FOR PRICE**
Gate valve assembly (shipped loose) for N8600P & N8800 (AS3547487)-----
Ball Valve Assembly (shipped loose) for N8600P & N8800 (AS000-BMU-0034)

BUILT INS

DIS SERIES

DIS-SL - Shorten dispenser tubes to special length -----
Stainless steel outer jacket for dispenser tubes
(standard on DIS-ET & DIS-QT) -----
DIS-SSDT - 12" diameter stainless steel dish dispenser tray
(DIS 1200 or 1450 only) -----
DIS-NMR Non-marring rods for oval dishes and diameter adjustment
(-813 through -1450 only) installation reduces
dispenser diameter by 1.25" -----
DIS-DOME Stainless steel dome cover
(-813 through -1450 non-heated models; standard on -QT models; each)---

LT SERIES

Special heights -----
Shorten dispenser assembly to special length (LT units only) -----

DROP INS

200/300

Transparent lid per pan opening (ships loose) (Part# 3234189 -----
(N225P - 1 required) & (N227P - 2 required)
Bar lock for lid assembly (N225P-LK & N227P-LK) -----
Remote toggle switch assembly (ships loose)
(Part# AS000-473-003W) (for N225P & N227P) -----

N8000, N8100BP, 8100-EFP, N8200P, N8600P, N8700, N8800 & N8000N

208-240 volt, 60HZ, 1 phase step-down transformer
(models w/compressors) - export orders only-----
230 volt, 50 HZ electrical system (models w/compressors) -----
230 volt, 50 HZ or 208-240 volt, 60 HZ electrical system
(N8717-D,N8746ND, N8746N, N8731-D & N8831 only) -----
14-6, 14-8 or 14-10 adapter plates -----
AS000-B2G-004I - Telescoping cover - Per individual 12 x 20 well
(8100-EFP & N8700-D Series only) -----
Additional 2" x 20.88" adapter bars (AS265-AXE-0000) -----
Additional .88" x 20.75" adapter bars (AS243-ALS-003E) -----
Additional .88" x 12.75" adapter bars (AS243-ALS-0032) -----
AS372-102-0056 - Perforated false bottom, Single 12X20 well (liquitec&hot food
well) -----
AS372-102-0035 - Perforated false bottom (N8118BP) -----
AS372-102-0030 - Perforated false bottom (N8130BP) -----
AS372-102-0031 - Perforated false bottom (N8143BP) -----
Quantity 2 (AS372-102-0030) - Perforated false bottom (N8156BP) -----
AS372-102-0030 & AS372-102-0031 - Perforated false bottom (N8169BP) ---
Quantity 2 (AS372-102-0031) - Perforated false bottom (N8181BP) -----
Quantity 2 (AS372-102-0035) - Perforated false bottom (N8146NB) -----
Quantity 2 (AS372-102-0041) - Perforated false bottom (N8168NB) -----
AS372-102-005C - Perforated false bottom (N8630P) -----
AS372-102-005D - Perforated false bottom (N8643P) -----
AS000-BMU-0030 - Perforated false bottom (N8656P) -----
AS000-BMU-0031 - Perforated false bottom (N8669P) -----
AS000-BMU-0032 - Perforated false bottom (N8681P) -----
Fan assist package (cold units) -----
Relocate compressor (N8100B series) -----
Remote N8100BP, 8100-EFP, N8200P, N8200GP series
(specify refrigerant)*Excludes N8100-FA Series ----- (CREDIT)
Three-phase electrical system (N8600P & N8700 Series only)-----
Remote toggle switch assembly (shipped loose)
for N8100B, N8200, N8200G (AS000-473-003W) -----
Omit drains N8700-D & N8700-DESP models ----- (CREDIT)
Autofill kit (ship loose) for N8600P and N8800 (000-504-0030)-----

Autofill kit (ship loose) for N8700 (000-504-0031) -----

1007 - Flat kinked flange in lieu of standard flange-----per linear inch
Ball valve assembly (shipped loose) for 8100-FA, N8100BP, N8000, N8000NP &

Vegetable Spin Drier

SALD

Lettuce and Vegetable Spin Drier



SALD-1 - LETTUCE AND VEGETABLE SPIN DRIER



SALD-1

Product Information

- Body is 18-gauge stainless steel
- Legs are 1" diameter 16-gauge stainless steel tubing
- (3) 4.00" diameter polyurethane locking stem casters
- Outer lid is 18-gauge stainless steel
- Inner liner is perforated durable polyethylene plastic
- Water-tight motor and controls are mounted on the bottom of the unit
- 6' cord and plug supplied
- Unit standard with 1" OD drain and 6ft hose with hose clamp for draining
- Adjustable ON/OFF timer for drying times up to 5 minutes
- Lid and cover storing hooks come standard
- SALD-1 can not be shipped via UPS
- One year parts and labor standard warranty. Additional warranties available

Specifications

MODEL NUMBER	L	D	H	INNER LINER CAPACITY	INNER DIAMETER	LINER DEPTH	AMPS	H.P.	VOLTS/Hz	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
SALAD ACE LETTUCE AND VEGETABLE SPIN DRIER													
SALD-1	27"	27"	32.5"	20 gal.	15.62"	16.87"	2.7	1/6	115v/60Hz	5-15P	70	85	\$9,590

Options & Accessories

Extra polyurethane liner and inner lid (part# AS6230116) ship loose -----

Call for Price

Specifications and prices subject to change without notice.

CAB2

Mobile Enclosed Two Stack Dish Dispensers



CAB2 - MOBILE ENCLOSED TWO STACK DISH DISPENSERS



CAB2

Product Information

Cabinet

- Cabinet top to be 16-gauge stainless steel, welded, polished and reinforced
- Outer body and corners to be 20-gauge stainless steel
- Non-marring gray corner bumpers
- (4) 4.00" diameter polyolefin swivel casters (all locking)

Dispensers

- Top flange and bottom brace to be 18-gauge stainless steel
- Vertical side channels 22-gauge stainless steel
- Flange, channels and bottom to be integrally welded
- Spring supports to be 14-gauge stainless steel
- Carrier head made of welded rods with a removable 18-gauge top plate
- Self-leveling mechanism, field adjustable by adding or removing springs
- High impact plastic guide posts mounted to flange

ET/QT

- 9' cord and plug supplied
- Convection heating module and fan motor per dispenser
- Outer 22-gauge stainless steel jacket around dispenser
- Air intake shall be filtered
- On/off switch on each dispenser
- Each dispenser to have an adjustable thermostat
- QT- each dispenser shall have a stainless steel cover
- ET- Maintains temperatures between 120-140°F (49-60°C)
- QT- Maintains temperatures between 150-170°F (66-77°C)
- One year parts and labor standard warranty. Additional warranties available

Laminate & Fiberglass Pricing Chart

Must specify color selection on order.

Model	Laminate Price	Fiberglass Panel Price
CAB2-500		
CAB2-575		
CAB2-650		
CAB2-725		
CAB2-813		
CAB2-913		
CAB2-1013		
CAB2-1200		
CAB2-1450		

Call for Price

For a complete list of fiberglass colors, contact Delfield or visit the website at www.delfield.com.

Specifications

MODEL NUMBER	L	D	H	DISH DIAMETER *	AMPS	WATTS	VOLTS	NEMA PLUG	SHIP WEIGHT	FREIGHT CLASS	LIST PRICE
MOBILE ENCLOSED TWO-STACK DISH DISPENSERS											
With unheated dispensers											
CAB2-500	28.25"	17"	36"	3"-5"	N/A	N/A	N/A	N/A	125	100	\$7,400
CAB2-575	28.25"	17"	36"	5"-5.75"	N/A	N/A	N/A	N/A	125	100	\$7,790
CAB2-650	28.25"	17"	36"	5.75"-6.5"	N/A	N/A	N/A	N/A	127	100	\$8,205
CAB2-725	28.25"	17"	36"	6.5"-7.25"	N/A	N/A	N/A	N/A	130	100	\$8,640
CAB2-813	28.25"	17"	36"	7.25"-8.12"	N/A	N/A	N/A	N/A	132	100	\$9,090
CAB2-913	28.25"	17"	36"	8.12"-9.12"	N/A	N/A	N/A	N/A	135	100	\$9,565
CAB2-1013	28.25"	17"	36"	9.12"-10.12"	N/A	N/A	N/A	N/A	142	100	\$10,070
CAB2-1200	37"	19"	36"	10.12"-12"	N/A	N/A	N/A	N/A	160	100	\$10,595
CAB2-1450	42"	21.5"	36"	12"-14.5"	N/A	N/A	N/A	N/A	176	100	\$11,160
With Even Temp heated dispensers											
CAB2-500ET	28.25"	17"	36"	3"-5"	11.0	800	120	5-20P	144	125	\$11,140
CAB2-575ET	28.25"	17"	36"	5"-5.75"	11.0	800	120	5-20P	146	125	\$11,725
CAB2-650ET	28.25"	17"	36"	5.75"-6.5"	11.0	800	120	5-20P	148	125	\$12,340
CAB2-725ET	28.25"	17"	36"	6.5"-7.25"	11.0	800	120	5-20P	152	125	\$12,985
CAB2-813ET	32.25"	17"	36"	7.25"-8.12"	11.0	1400	120	5-20P	160	125	\$13,675
CAB2-913ET	32.25"	17"	36"	8.12"-9.12"	11.0	1400	120	5-20P	168	125	\$14,390
CAB2-1013ET	32.25"	17"	36"	9.12"-10.12"	11.0	1400	120	5-20P	171	125	\$15,145
CAB2-1200ET	37"	19"	36"	10.12"-12"	11.0	1400	120	5-20P	192	125	\$15,940
CAB2-1450ET	42"	21.5"	36"	12"-14.5"	11.0	1400	120	5-20P	201	125	\$16,780

Mobile Dispensing Equipment accessories and modifications can be found on page 83.

Note: Non-Marring Rods reduces allowable dish diameter by 1.25". Non-Marring Rods factory recommended for DIS-1200 with plate diameter of 10.13" - 10.75" and DIS-1450 with plate diameter of 12" - 13.25". Please consult with factory to confirm operational fit.

Specifications and prices subject to change without notice.

CAB2 SERIES

Call for Price

12" diameter stainless steel dish dispenser tray (-1200 and -1450 models only) -----	
Non-marring rods for oval dishes and diameter adjustment (-813 through -1450 only) per dispenser installation reduces dispenser diameter by 1.25" -----	
Stainless steel tube cover (-500 thru -725-ET and non-heated models) -----	
Stainless steel dome cover (-813 through -1450 models non-heated models; standard on -QT models; each) -----	
Hold-down rod for dispenser tubes -----	
Wrap-around bumpers (-500 through -1200 only; adds 1.75" to length and depth) -----	
Wrap-around bumpers (-1450 only; adds 1.75" to length and depth) -----	
Four 4" diameter polyurethane casters (four locking) in lieu of standard casters -----	
Four 5" diameter polyurethane casters (four locking) in lieu of standard casters -----	
Flange-mount feet in lieu of standard casters -----	
Shorten dispenser tubes to special length -----	

Specifications and prices subject to change without notice.

200	68	DSLH	11	SALD-1	80
300	68	DSLHP	11	SC	52
402	27	DSLHRI	13	SCFT-NU	49
403	27	DSLHRT	14	SCI	50
406P	25	DSLR	10	SCS	53
406-CAP	25	DSLPT	12	SCSC-B	47
407P	25	DSLRRRI	13	SCSC-EF	47
407-CAP	25	DSLRRRT	14	SCTRI	53
4400NP-M	31	6025	17	SCTS	53
4400NP-S	30	6051	17	SCU	51
4400RP	32	4500	23	SH	46
8100-EF	70	4400	21	SHC	48
18600BSTMP	27	KC	60	SHCR-B	48
18600BUCMP	27	KCFT-NU	57	ST4048P	27
18600PTBMP	33	KCI	58	ST4400NP-M	22
18600PTLP	33	KCS	61	ST4400NP-S	22
18600PDLP	33	KCSC-B	55	STD4400NP-M	22
CAB2	82	KCSC-EF	55	STD4400NP-S	22
CD	76	KCTS	61	UC4048P	25
CTP-NB	33	KCU	59		
CV5E	19	KH	54		
CV10E	19	KHC-NU	56		
CV15E	19	KHCR-B	56		
CV15E-2	19	LT	77		
D4400NP-M	31	N8000N	69		
D4400NP-S	30	N8100B	69		
DCFS	45	N8100-FAP	70		
DIS	75	N8100N	69		
EHEI-E	41	N8200	71		
F26/F27	38	N8200G	71		
F28/F29	38	N8200-ST	71		
FLEXISHIELD® FOOD SHIELDS	45	N8600	72		
DSLDT	12	N8700	73, 74		
DSLFI	10	N8700N	73		
DSLPTF	12	N8800	72		
DSLRFRI	13	ND	76		

[illegible]

LIMITED WARRANTY

Garland Canada (GC) warrants this product to be free from defects in material and workmanship for a period of one (1) year from the date the product is installed or twenty-four (24) months from the date of shipment from our facility, **whichever comes first**, and sold within Canada.

During the warranty period, GC shall, at GC's option, repair or replace parts determined by GC to be defective in material or workmanship, and with respect to services, shall re-perform any defective portion of said services. The foregoing shall be the sole obligation of GC under this Limited Warranty with respect to the equipment, products and services. With respect to equipment, materials, parts and Accessories manufactured by others, GC's sole obligation shall be to use reasonable efforts to obtain the full benefit of the manufacturer's warranties. GC shall have no liability, whether in contract, tort, negligence, or otherwise, with respect to non-GC manufactured products.

WHO IS COVERED

This Limited Warranty is available only to the original purchaser of the product and is not transferable.

EXCLUSIONS FROM COVERAGE

- Repair or replacement of parts required because of misuse, improper care or storage, negligence, alteration, accident, use of incompatible supplies or lack of specified maintenance shall be excluded;
- Normal maintenance items, including but not limited to, light bulbs, fuses, gaskets, O-rings, interior and exterior finishes, lubrication, de-liming, broken glass, etc.;
- Failures caused by improper or erratic voltages;
- Improper or unauthorized repair;
- Changes in adjustment and calibration after ninety (90) days from equipment installation date;
- This Limited Warranty will not apply to any parts subject to damage beyond the control of GC, or to equipment which has been subject to alteration, misuse or improper installation, accidents, damage in shipment, fire, floods, power changes, other hazards or acts of God that are beyond the control of GC;
- This Limited Warranty does not apply, and shall not cover any products or equipment manufactured or sold by GC when such products or commercial equipment is installed or used in a residential or non-commercial application. Installations not within the applicable building or fire codes render this Limited Warranty and any responsibility or obligations associated therein null and void. This includes any damage, costs or legal actions resulting from the installation of any GC commercial cooking equipment in a non-commercial application or installation, where the equipment is being used for applications other than those approved for by GC;
- If any product is cleaned without using an approved GC cleaning solution, this Limited Warranty shall be void;
- Removal, alteration or obliteration of the rating plate;
- Consequential damages (the cost of repairing other property which is damaged) loss of time, profits or any other incidental damages of any kind.
- This warranty does not cover the refrigerator drier or the light bulbs used in the unit;

- This warranty is subject to the users normal maintenance and care responsibility as set forth in the Service and Installation Manual, such as cleaning the condenser coil, and is in lieu of all other obligations of GC.

LIMITATIONS OF LIABILITY

The preceding paragraphs set forth the exclusive remedy for all claims based on failure of, or defect in, products or services sold hereunder, whether the failure or defect arises before or during the warranty period, and whether a claim, however instituted, is based on contract, indemnity, warranty, tort (including negligence), strict liability, implied by statute, common-law or otherwise, and GC its servants and agents shall not be liable for any claims for personal injuries, incidental or consequential damages or loss, howsoever caused. Upon the expiration of the warranty period, all such liability shall terminate. **THE FOREGOING WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER WRITTEN, ORAL, IMPLIED OR STATUTORY. NO IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE SHALL APPLY, GC DOES NOT WARRANT ANY PRODUCTS OR SERVICES OF OTHERS.**

REMEDIES

The liability of GC for breach of any warranty obligation hereunder is limited to: (i) the repair or replacement of the equipment on which the liability is based, or with respect to services, re-performance of the services; or (ii) at GC's option, the refund of the amount paid for said equipment or services. Any breach by GC with respect to any item or unit of equipment or services shall be deemed a breach with respect to that item or unit or service only.

WARRANTY CLAIM PROCEDURE

Customer shall be responsible to:

- Immediately advise the Dealer or GC's Factory Authorized Servicer of the equipment serial number and the nature of the problem. For a list of Factory Authorized Services, please refer to www.garlandcanadaservice.ca;
- Verify that the problem is a factory responsibility. Improper installation or misuse of equipment is not covered under this Limited Warranty;
- Cooperate with the Factory Authorized Servicer so that warranty service may be completed during normal working hours;
- Travel time not to exceed two (2) hours and mileage not to exceed one hundred fifty (150) kilometres. Does not include travel other than overland, overtime, holiday charges and any special arrangement.

GOVERNING LAW

For equipment, products and services sold in Canada this Limited Warranty shall be governed by the laws of the province of Ontario, Canada excluding their conflicts of law principles. The United Nations Convention on Contracts for the International Sale of Goods is hereby excluded in its entirety from application to this Limited Warranty.

Garland Canada

1177 Kamato Road
Mississauga, Ontario
Canada L4W1X4

www.garlandcanada.ca

Canadian Regional Sales Representatives



REGION	REP / AGENT	E-MAIL	CELLULAR
British Columbia	Ryan Lewis – Sales Rep	ryan@masales.ca	604-329-0684
	Mark Thiessen – Sales Rep	mark@masales.ca	604-657-7615
Alberta	James Goodman – Sales Rep (Calgary)	james@masales.ca	403-618-3636
	Collin Von Hansen – Sales Rep	collin@masales.ca	587-832-2090
	Sandro Salvador – Sales Rep (Edmonton)	sandro@masales.ca	780-405-2637
Prairies	Jeff McGowan – Sales Rep (SK, MB)	mcgowansales@bellnet.ca	647-231-3815
Ontario	Chris Ozog – Sales Rep (Central ON)	chris.ozog@garland-group.com	416-526-7989
	Geoff Scott – Regional Sales Manager Rep (Southern & Western ON)	geoff.scott@garland-group.com	647-828-9391
	Chris Taylor – Sales Rep (Central ON)	chris.taylor@garland-group.com	416-358-4421
	Jeff McGowan – Sales Rep (Northeastern ON)	mcgowansales@bellnet.ca	647-231-3815
Quebec	Maxime Gaudreault – Regional Sales Manager Rep (Quebec City)	maxime.gaudreault@garland-group.com	437-577-3719
	Jean-François Bonin – Sales Rep (Montreal)	jean-francois.bonin@garland-group.com	438-221-4193
	Michel Grenier – Sales Rep (Montreal)	michel.grenier@garland-group.com	437-333-3447
Atlantic Canada	Aaron Taylor – Sales Rep (PEI, NB)	aaron@tayloragencies.com	506-872-1177
	Steven Donnelly – Sales Rep (NS, NL)	steven@tayloragencies.com	902-999-7631

GARLAND CANADA CUSTOMER SERVICE	VOICE	FAX
Sales	(888) 442-7526	(800) 361-2724
KitchenCare (Parts, Service and Warranty)	(844) 724-2273	N/A

Scan the code below to locate a dealer, distributor or sales representative in your area.



www.garlandcanada.ca/sales/buy-locally



Welbilt offers fully-integrated kitchen systems with award-winning product brands: **Cleveland™**, **Convotherm®**, **Delfield®**, **Frymaster®**, **Garland®**, **Kolpak®**, **Lincoln®**, **Merco®**, **Merrychef®** and **Multiplex®**. Supported by service brands: **KitchenCare®**, aftermarket parts and service; **FitKitchen®**, fully-integrated kitchen systems; and **KitchenConnect®**, cloud-based open digital platform.

Bringing innovation to the table • welbilt.com